


L7600 LED Vaportite Series

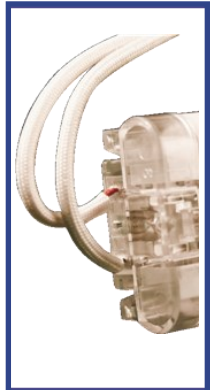

APPLICATIONS

- Parking Garages
- Distribution Centers
- Laundry Rooms
- Night Lighting
- Covered Parking
- Cold Storage/ Freezers
- Stairwells
- Warehouse
- Corridors
- Canopies
- Car Washes

FEATURES

- Easy, fast, tool-free maintenance
- Low maintenance
- Projected L70: 203,000 hours*
- Bi-level dimming and wireless control options
- Energy efficient—up to 90% savings over current energy/lighting costs
- IP 65, IP 66 & IP 67 Rated, NSF and NEMA 4X**

*Based on IES TM21 projection

** If a sensor is added as an option. Wet rated sensor needs to be specified to maintain wet rating on fixture.

SPECIFICATIONS

- Low profile design
- Poured in place gasket and cam latches seal the enclosures from most hostile environments
- Linear ribbed high impact acrylic diffuser
- Optically clear wide lens optional
- Geartrays for the electrical components simplify assembly
- Standard with stainless steel mounting brackets
- Stainless steel latches optional

TECHNICAL INFORMATION

- Light Source: LED Light Bar Module
- Power Source: LED High Efficiency Power Supply
- Voltage: Universal 120 to 277
- CCT: 30K, 40K & 50K
- CRI: ± 84 (also available in 90)
- Mounting: Surface
- Compliance: ETL
- Input voltage: 18Vdc (12W) 36Vdc (25W & 50W)
- Input current: 700mA (25W & 12W), 1.4A (50W)
- Driver capable of 0-10V dimming

L7600 LED Vaportite Series


CATALOG ORDERING EXAMPLE:

L7648-L4600-40K

L76

FAMILY TYPE	LENGTH IN INCHES/ WATTAGE	COLOR TEMPERATURE	ADDERS
L76	24 - L1200 (12.5 Input Watts/1 -2FT Bar/ 1,563 lms)	30K (3000 Kelvin Temp)	OS (Occupancy Sensor)
	48 - L1200 (12.5 Input Watts/1 -2FT Bar/ 1,563 lms)	40K (4000 Kelvin Temp)	OSD (Occupancy Sensor w/ Daylight)
	48 - L2150 (25 Input Watts/1 -4FT Bar/ 3,165 lms)	50K (5000 Kelvin Temp)	OSW (Wet Occupancy Sensor)
	48 - L4600 (50 Input Watts/1-4FT Bar/ 5,849 lms)		EX (Sensor Extension Bracket)
			PRGOS-LS (Sensorswitch LSXR-ADC-3v Occ Sensor w/ Dimming Photocell/ External Mount)
			PRGOS-LO (IRTEC LOD509 Bi-Level Occ Sensor w/ Photocell/ External and Integral Mount)
			PRGOS-LR (IRTEC LRD509 Programmable Occ Sensor w/ Remote Control/ External and Integral Mount)
			EMR (LED Emergency Lighting)
			C6 (6' Cord)
			PC (Polycarbonate Diffuser)
			DL (Deep Lens)
			SSL (Stainless Steel Latches)

Specifications and Dimensions subject to change without notice. Contact factory for updates. (909) 948-8878

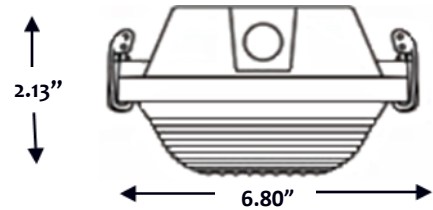

SAFETY WARNING

FOR YOUR SAFETY, READ AND FOLLOW ALL INSTRUCTIONS TO PREVENT ELECTRIC SHOCK OR FIRE

- INSTALLATION REQUIRES KNOWLEDGE OF LIGHTING LUMINAIRE ELECTRICAL SYSTEMS**
 Contact qualified electrician prior to installation.
- DISCONNECT POWER BEFORE INSTALLATION DO NOT ALTER PRE-EXISTING HOLES OR DRILL NEW HOLES**
- CHECK FOR INCLOSED WIRING COMPONENTS PRIOR TO DRILLING**
 Luminaire wiring, ballasts, power supplies or other electrical parts may be damaged.
- USE ONLY ON COMPATIBLE LUMINAIRES**
 Installation requires specific dimensions and construction features.
- PROTECT WIRING FROM ABRASION**
 Do not expose wiring to sharp objects or edges of sheet metal.

INSTALLATION INSTRUCTIONS

- Disconnect Power to the circuit supplying power to the fixture
- Removed the existing lamps and fixture
- Disassemble new fixture to allow access to the LED Driver
- Run existing power supply wires into fixture through fixture knock-out or end plug on fixture
- Mount the fixture to surface, or hang fixture with appropriate fixture mounting hardware or install fixture in T-bar Ceiling (*Be sure to follow local building codes for the appropriate fixture installation methods.*)
- Connect power supply wires to supplied wire disconnect to provide power to fixture
- Re-assemble fixture
- Re-connect power and check installation

Revised 9/6/16