



<b>Catalog No.</b>	<b>Type:</b>
<b>Job Name:</b>	

# 4400 Series

## Architectural Vanity




### General Characteristics:

Lamp Type: 2 or 4 Lamp T5 or T8  
 Ballast Type: Electronic Ballast  
 Standard Voltage: Universal 120-277  
 Options: Dimming Ballast, With Lamps, Over-Lay Lens, White Louver, Semi-Specular Louver  
 Mounting: Wall  
 Additional Info: UL Listed & Title 24 Compliant

### Features & Specifications:

A companion to the 6900 series our architectural linear wall mount vanity provides an indirect luminaire with forward throw optics designed for sconce application, such as hospitality, restrooms, corridors or small offices. This fixtures is standard in perforated white powder coat housing. Also available in a variety of finish options upon request.

- A computer designed optical system maximizes the output of the lamps producing very wide distribution for even brightness
- Housing made of 20 gauge cold rolled steel
- Standard in perforated white powder coat housing (over-lay lens, semi- specular or white louver also available)
- Reflector is made of anodized aluminum
- Reflectors are slotted when used with the perforated housing
- Available in a variety of lamp configurations
- Die cast aluminum ends
- Suitable for damp location

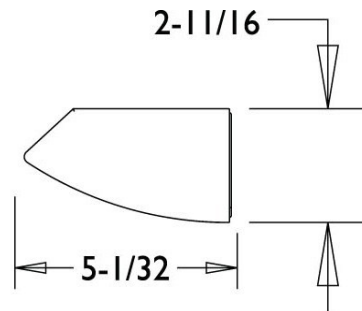

Catalog Ordering: Example: 4448-232-UNV-DIM-WL

<b>44</b>					
-----------	--	--	--	--	--

FAMILY TYPE	LENGTH IN INCHES/ LAMPING	# OF BALLAST	BALLAST/ VOLTAGE	OPTIONS
44	24-217 (2- F17T8)*	/1	UNV (120-277 Volt)	WL (Lamps Plus)
	24-214 (2- F14T5)*	/2	DIM (Dimming Ballast)	OL (Overlay Lens)
	24-224 (2- F24T5HO)*			LV-W (White Louver)
	48-232 (2- F32T8)			LV- SS (Semi- Specular Louver)
	48-228 (2- F28T5)			OS (Occupancy Sensor)
	48-254 (2- F54T5HO)			
	96-232T (4- F32T8)			
	96-228T (4- F28T5)			
	96-254T (4- F54T5HO)			

\* 2' Fixture not available with the perforated design

Specifications and Dimensions Subject to change without notice

FSC Lighting 9120 Center Avenue, Rancho Cucamonga, CA 91730 Ph 909-948-8878 Fax 909-948-8510

