



5900 Series

RDI Center Basket Troffer



General Characteristics:


Lamp Type: 1, 2 or 3 Lamp T5 or T8
 Ballast Type: Electronic Ballast
 Standard Voltage: Universal 120- 277
 Options: Dimming Ballast, With Lamps,
 Mounting: Recessed
 Additional Info.: UL Listed & Title 24 Compliant

Catalog No.	Type:
Job Name:	

Specifications & Features:

An attractive center basket direct/ indirect fluorescent fixture, the 5900 Series provides soft, balanced illumination for a contemporary appearance and comfortable, low glare light. The housing and lamp compartment are fully recessed above the ceiling the ceiling plane, minimizing lamp exposure. The perforated baffle and curved reflector produce a combination of direct and indirect light, fully illuminating the fixture housing.

- Housing made from die formed 24 gauge pre-painted cold rolled steel
- White perforated metal basket with white opal acrylic diffuser in-lay
- Hinged baffle for quick easy lamp access
- 91% reflectance baked white acrylic matte paint finish.. High Available in a variety of Lamps configurations
- Suitable for damp location

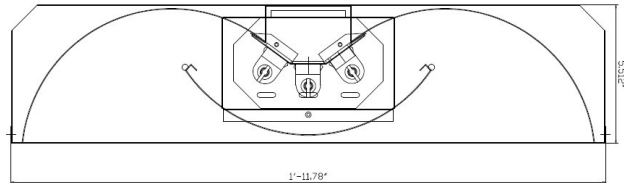

Catalog Ordering: Example: 5922-114-UNV

59				
FAMILY TYPE	SIZE/ LAMPING	# OF BALLASTS	BALLAST/ VOLTAGE	OPTIONS
59	22-117 (1- F17T8)	/1	UNV (120-277 Volt)	WL (With Lamps)
	22-217 (2- F17T8)	/2	DIM (Dimming Ballast)	
	22-317 (3- F17T8)			
	14-132 (1- F32T8)			
	14-232 (2- F32T8)			
	24-132 (1- F32T8)			
	24-232 (2- F32T8)			
	24-332 (3- F32T8)			
	22-114 (1- F14T5)			
	22-214 (2- F14T5)			
	22-314 (3- F14T5)			
	22-124 (1- F24T5HO)			
	22-224 (2- F24T5HO)			
	22-324 (3- F24T5HO)			
	24-128 (1- F28T5)			
	24-228 (2- F28T5)			
	24-328 (3- F28T5)			
	24-154 (1- F54T5HO)			
	24-254 (2- F54T5HO)			
	24-354 (3- F54T5HO)			

Specifications and Dimensions Subject to change without notice

FSC Lighting 9120 Center Avenue, Rancho Cucamonga, CA 91730 Ph 909-948-8878 Fax 909-948-8510

