



# 6300 Series

Direct/ Indirect Linear Basket



**General Characteristics:**


Lamp Type: 1 or 2 Lamp T5 or T8  
 Ballast Type: Electronic Ballast  
 Standard Voltage: Universal 120-277  
 Options: Dimming Ballast, Emergency Ballast, With Lamps  
 Mounting: Surface  
 Additional Info.: UL Listed & Title 24 Compliant

Catalog No.	Type:
Job Name:	

**Features & Specifications:**

The graceful 6300 Series creates a bold luminaire, while providing a comfortable atmosphere. Wide winged reflectors effectively direct light, while adding a soft glow and presence to the fixture. The perforated basket and soft white diffuser shield lamp glare, while the sloping reflector provides a gentle up-lighting effect creating distinctive look for task or general applications.

- Housing made from die formed heavy gauge pre-painted cold rolled steel
- Baffle is made of cold rolled steel with 5/64" diameter micro-perforations at staggered 7/64" intervals
- Hinged baffle for quick easy lamp access
- Diffuser is made of .020 white opal acrylic
- Finished in a white polyester polymer with a minimum of 82% reflectivity
- Available in a variety of lamp configurations
- Suitable for damp location

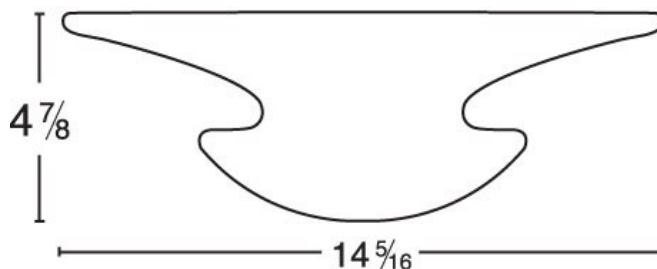

Catalog Ordering: Example: 6348-254-UNV-WL

<b>63</b>				
-----------	--	--	--	--

FAMILY TYPE	LENGTH IN INCHES/ LAMPING	BALLAST/ VOLTAGE	OPTIONS
63	48-132 (1- F32T8)	UNV (120-277 Volt)	EMR (450 Lumen Emergency Ballast)
	48-232 (2- F32T8)	DIM (Dimming Ballast)	EMR 1400 (1400 Lumen Emergency Ballast)
	48-128 (1- F28T5)		WL (With Lamps)
	48-228 (2- F28T5)		
	48-154 (1- F54T5HO)		
	48-254 (2- F54T5HO)		

Specifications and Dimensions Subject to change without notice

FSC Lighting 9120 Center Avenue, Rancho Cucamonga, CA 91730 Ph 909-948-8878 Fax 909-948-8510

