




<b>Catalog No.</b>	<b>Type:</b>
<b>Job Name:</b>	

# 8200 Series

## Narrow Strip T8 or T5

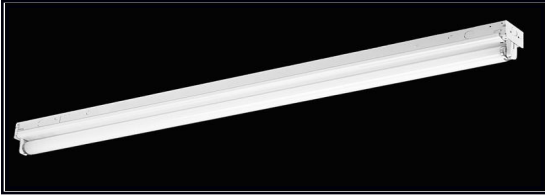


### General Characteristics:

Lamp Type: 1, 2 or 4 lamp T5 or T8  
 Ballast Type: Electronic Ballast  
 Standard Voltage: 120 (Universal 120-277 optional)  
 Options: Dimming Ballast, Emergency Ballast, With Lamps, Universal Voltage, 6ft Cord and Plug, Wireguard  
 Mounting: Surface Mount  
 Additional Info.: UL Listed & Title 24 Compliant  
 Additional Info: UL Listed

### Features & Specifications:

The 8200 Series is a functional multi-purpose narrow strip that incorporates premium performance and construction durability. This series can be installed using various mounting methods and numerous options and accessories are available. The 8200 Series can be the illumination solution in commercial, industrial and residential applications. Ideal for warehouses, garages, utility rooms, and production lines.

- T8 or T5 strip available in a large variety of configurations
- Mounted individually or in continuous rows
- Housing is pre-painted stamped steel
- Numerous knockouts for ease of installation
- White polyester polymer with a minimum of 82% reflectivity
- Suitable for damp location
- Narrow body to fit confined spaces

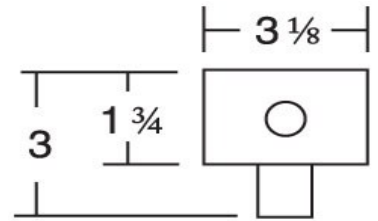

Catalog Ordering: Example: 8248-232-DIM-WL-WG

<b>82</b>					
-----------	--	--	--	--	--

FAMILY TYPE	LENGTH IN INCHES/ LAMPING	# OF BALLAST	BALLAST/ VOLTAGE	OPTIONS
82	18-EL (1- F15T8)*	/1	120 (120 Volt)	EMR (450 Lumen Emergency Ballast)**
	24-117 (1- F17T8)	/2	MVL (Instant Start Multi-Volt Low)**	EMR 1400 (1400 Lumen Emergency Ballast)**
	24-217 (2- F17T8)		MVN (Instant Start Multi-Volt Normal)**	WL (With Lamps)
	36-125 (1- F25T8)		MVH (Instant Start Multi-Volt High)**	PLG (6' SJT Cord & Plug)
	36-225 (2- F25T8)		DIM (Dimming Ballast)**	PLG-277 (6' L7 Twist Lock Cord)
	48-132 (1- F32T8)			WG (Wireguard)
	48-232 (2- F32T8)			
	72-125T (2- F25T8)			
	72-225T (4- F25T8)			
	84-EL (1- F25T8 & 1- F32T8)			
	96-132T (2- F32T8)			
	96-232T (4- F32T8)			
	24-114 (1- F14T5)			
	24-214 (2- F14T5)			
	24-124 (1- F24T5HO)			
	24-224 (2- F24T5HO)			
	36-121 (1- F21T5)			
	36-221 (2- F21T5)			
	36-139 (1- F39T5HO)			
	36-239 (2- F39T5HO)			
	48-128 (1- F28T5)			
	48-228 (2- F28T5)			
	48-154 (1- F54T5HO)			
	48-254 (2- F54T5HO)			
	96-128T (2- F28T5)			
	96-228T (4- F28T5)			
	96-154T (2- F54T5HO)			
	96-254T (4- F54T5HO)			

\* 8218 is not available with a Universal, Dimming or Universal Ballast

\*\* Not Available in 18" fixture

Specifications and Dimensions Subject to change without notice

FSC Lighting 9120 Center Avenue, Rancho Cucamonga, CA 91730 Ph 909-948-8878 Fax 909-948-8510

Revised 1/14/14






Catalog No.	Type:
Job Name:	

# 8200 Series


Narrow Strip T8 or T5 Reflectors

## Asymmetrical

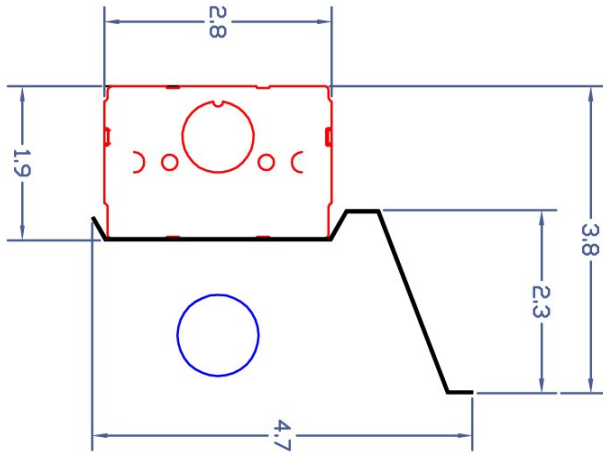


ASYM-1

## Symmetrical

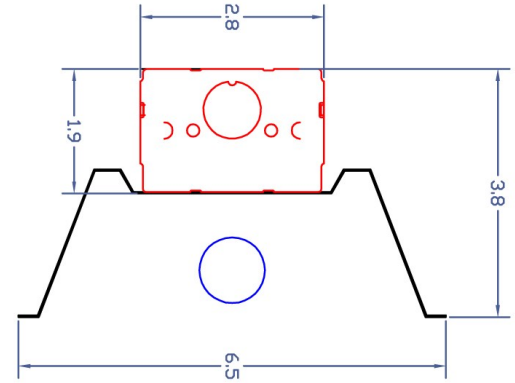

SYM-1

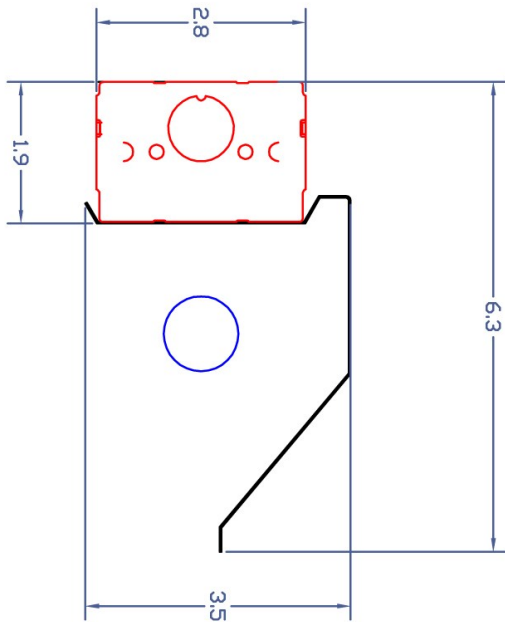

ASYM-2

Specifications and Dimensions Subject to change without notice

FSC Lighting 9120 Center Avenue, Rancho Cucamonga, CA 91730 Ph 909-948-8878 Fax 909-948-8510

Revised 1/14/14

