

Date:	Project:	Type:	Notes:	Catalog #:
-------	----------	-------	--------	------------

L74-RFK SERIES LED Troffer Kit

The L74-RFK Series is designed to distribute light spaciouly along both vertical and horizontal planes.



Features & Specifications

Applications

Ideal for use in offices, retail, schools, offices, hallways, multi-purpose rooms and hospitality areas.

Construction

Housing made from cold rolled steel and is finished with a post-production baked white powder coat. Frosted diffuser.

Mounting

Recessed mount.

Electrical

Utilizes high-efficiency LED power supply and circuit boards. 120-277V & 0-10V dimming standard. 50/60HZ input frequency.

Operating Temperature

Suitable for -20°C – 40°C Ambient

Lumen Maintenance

L70 rating of 122,000 hours

Warranty

Five-year warranty. Terms and Conditions Apply. See warranty documentation for more information.

Certification

UL Damp Listed. Adheres to LM79, LM80 and TM21 industry standards. DesignLights Consortium® (DLC) qualified¹. RoHS Compliant.

Performance Data

Form Factor	Rated Wattage	Tested Wattage	Delivered Lumens	Efficacy	CRI
2x2	18W	18W	2,250 LM	125 LPW	>83
2x2	25W	25W	3,125 LM	125 LPW	>83
2x2	30W	30W	3,750 LM	125 LPW	>83
2x2	32W	32W	4,000 LM	125 LPW	>83
2x4	23W	23W	2,875 LM	125 LPW	>83
2x4	30W	30W	3,750 LM	125 LPW	>83
2x4	34W	34W	4,250 LM	125 LPW	>83
2x4	36W	36W	4,500 LM	125 LPW	>83
1x4	30W	30W	3,750 LM	125 LPW	>83



L74									
1	2	3	4	5	6	6	6	6	6

1 - Series	2 - Dimensions/Wattage	3- Color Temp (CCT)	4- Type
L74	22 - 18W (2x2 / 20 Watt) 22 - 25W (2x2 / 25 Watt) 22 - 30W (2x2 / 30 Watt) 22 - 32W (2x2 / 32 Watt) 24 - 23W (2x4 / 23 Watt) 24 - 30W (2x4 / 30 Watt) 24 - 34W (2x4 / 34 Watt) 24 - 36W (2x4 / 36 Watt) 14 - 30W (1x4 / 30 Watt)	35K (3500 Kelvin Temp) 40K (4000 Kelvin Temp) 50K (5000 Kelvin Temp)	RFKW (Retrofit Kit)
5- Version	6- Options		
E5 (DLC Version 5.0)	EM5W (Battery Backup, 5 Watts, ~650 lumens) ² EM10W (Battery Backup, 10 Watts, ~1300 lumens) ² EM5WT20 (Title 20 Compliant Battery Backup, 5 Watts, ~650 lumens) ² EM10WT20 (Title 20 Compliant Battery Backup, 10 Watts, ~1300 lumens) ² OS (Occupancy Sensor) PRGOS-XX (Programmable Sensor to be specified) AR (Air Return) BAA (Buy American Act Compliant)		

Notes

1 Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/ to confirm which versions are qualified.
 2 Lumens will change based on fixture selection. Consult with factory for additional options.


Photometric Data

L7424-36W-35K-RFKW Tested in accordance to IESNA LM-79

Zonal Lumen Summary

Zone	Lumens	%Luminaire
0-10	148.69	3.16%
10-20	425.28	9.05%
20-30	642.57	13.67%
30-40	773.24	16.45%
40-50	804.56	17.12%
50-60	745.16	15.86%
60-70	612.65	13.03%
70-80	403.49	8.59%
80-90	124.34	2.65%
90-100	3.65	0.08%
100-110	3.08	0.07%
110-120	2.89	0.06%
120-130	2.66	0.06%
130-140	2.22	0.05%
140-150	1.84	0.04%
150-160	1.41	0.03%
160-170	0.99	0.02%
170-180	0.40	0.01%

Polar Graph

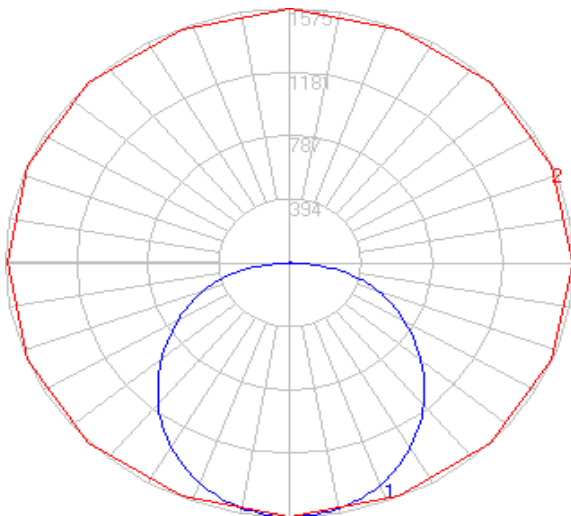


Physical Characteristics


Dimensions

Version	Depth	Length	Width	Weight
2x2	2.87"	23.87"	24.00"	12lbs
2x4	2.87"	45.50"	23.00"	19lbs
1x4	2.87"	45.50"	10.87"	12lbs


Top View- 2x2




Bottom View- 2x2



Top View- 2x4

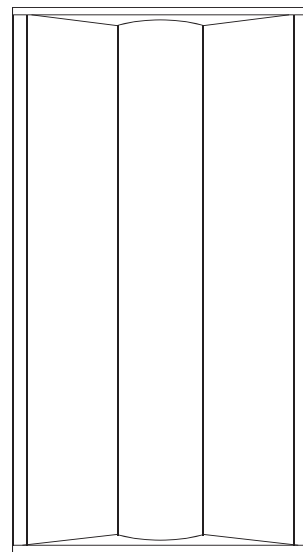

Bottom View- 2x4

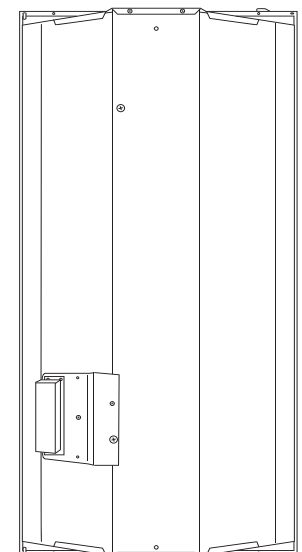

End View- 2x2 & 2x4



Side View- 2x2

