

Date:	Project:	Type:	Notes:	Catalog #:
-------	----------	-------	--------	------------

## L1515 SERIES LED Square Canopy Fixture



The L1515 Series is a square shaped fixture that utilizes a light guide lens for soft, glare-free illumination. Suitable for surface mount and ideal for parking garages, canopies or any low bay applications.

### Features & Specifications

#### Applications

Ideal for use in canopies, corridors, stairwells, strip malls, hospitality, multi-family, K-12 and higher education.

#### Construction

Housing made from die formed heavy gauge cold rolled steel and is finished with a post- production baked white anti-rust coat. High-efficiency, visual-comfort diffused lens.

#### Mounting

Surface mount. Cord and plug options offered.

#### Electrical

Utilizes high-efficiency LED power supply and circuit boards. 120-277V & 0-10V dimming standard. 50/60HZ input frequency.

#### Operating Temperature

Suitable for -40°C – 50°C Ambient

#### Lumen Maintenance

L70 rating of 246,000 hours

#### Warranty

Five-year warranty. Terms and Conditions Apply. See warranty documentation for more information.

#### Certification

ETL Listed. Adheres to LM79, LM80 and TM21 industry standards. DesignLights Consortium® (DLC) qualified. RoHS Compliant. IP65 & IP66 Rated.

### Performance Data

FSC Part #	Form Factor	Wattage	Delivered Lumens	CCT	CRI
L1515-14W	15"	14W	1,430 LM	40K, 50K	>80
L1515-27W	15"	27W	2,970 LM	40K, 50K	>80
L1515-34W	15"	34W	3,740 LM	40K, 50K	>80



<b>L1515</b>						
1	2	3	4	5	5	5

1 - Series	2 - Wattage	3 - CRI & Color Temp (CCT)	4- Ligh Distribution
<b>L1515</b>	<b>14W</b> (15 Watts) <b>27W</b> (26 Watts) <b>34W</b> (34 Watts)	<b>8-40K</b> (80 CRI- 4000 Kelvin Temp) <b>8-50K</b> (80 CRI- 5000 Kelvin Temp)	<b>WQ</b> (Wide Light Distribution)

5- Controls	6- Accessories
<b>PRGOS-FS</b> Wattstopper Programmable Occ Sensor w/ Remote Control	<b>EMR</b> Title 20 Compliant Emergency Battery Backup, 10 Watts, ~1300 Lumens (lumens will change based on fixture selection) <b>EB</b> Electrical Extension Box <b>PLG</b> 6' SJT Cord & Plug


## Photometric Data

L1515-34W-850K-WQ Tested in accordance to IESNA LM-79

### Zonal Lumen Summary

Zone	Lumens	%Luminaire
0-10	31.15	0.82%
10-20	103.45	2.75%
20-30	213.96	5.68%
30-40	417.17	11.08%
40-50	769.10	20.42%
50-60	1015.20	26.96%
60-70	777.40	20.64%
70-80	360.40	9.57%
80-90	68.20	1.81%
90-100	1.49	0.03%
100-110	1.44	0.03%
110-120	1.72	0.04%
120-130	1.66	0.04%
130-140	1.42	0.03%
140-150	1.01	0.02%
150-160	0.53	0.01%

### Polar Graph

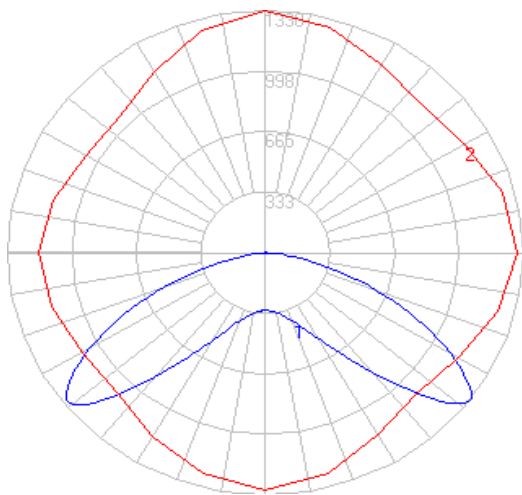


## Physical Characteristics


### Dimensions

Version	Depth	Length	Width	Weight
15" Square	1.89"	15.04"	15.04"	9lbs


Front View- Standard




Front View- w/ Sensor




Side View- Standard

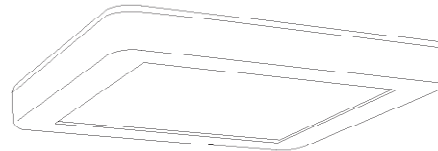

Side View- w/ Sensor

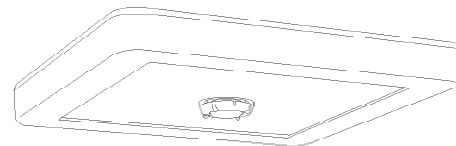

Back View



## Options

---

PRGOS-FS (Wattstopper FSP-211 Programmable Occ Sensor)



EB (Electrical Extension Box)

