

Date:	Project:	Type:	Notes:	Catalog #:
-------	----------	-------	--------	------------

WF-AO SERIES Adjustable LED Full Cut-off Wall Pack

The WP-AO Series is great for commercial and industrial applications. Adjustable output options makes the WP-AO the ideal choice for illuminating building perimeters where control of spill light is important.



Applications

Ideal for use in exterior commercial and industrial building perimeters.

Construction

Housing made from die-cast aluminum. Tempered glass lens.

Mounting

Wall Mount.

Electrical

Utilizes high-efficiency LED power supply and circuit boards.
120-277V & 0-10V dimming standard. 50/60HZ input frequency.
5KV Surge Protection.

Operating Temperature

Suitable for -40°C – 40°C Ambient

CRI

70+

Finish

Standard in dark bronze.

Warranty

Five-year warranty. Terms and Conditions Apply. See warranty documentation for more information.

Certification

UL Wet Listed. Adheres to LM79, LM80 and TM21 industry standards.
DesignLights Consortium® (DLC) Pending. IP65 Rated.



Catalog Ordering

Sample Part #WF-S-3L-AO-40K

Series	Size & Lumens	Type	Color Temp (CCT)	Finish
WF				
WF	S-3L (Small / 15W-22W-28W)	AO (Adjustable Output)	30K (3000 Kelvin Temp) 40K (4000 Kelvin Temp) 50K (5000 Kelvin Temp)	Blank (Standard Dark Bronze)

Performance Data

FSC Part #	Form Factor	Rated Wattage	Kelvin Temp	Delivered Lumens	Efficacy	CRI
WF-S-3L-AO	Small	15	3000	2118	141	>70
		15	4000	2162	145	>70
		15	5000	2184	145	>70
		22	3000	2918	132	>70
		22	4000	2980	138	>70
		22	5000	3009	136	>70
		28	3000	3289	121	>70
		28	4000	3602	133	>70
		28	5000	3568	132	>70

Electrical Data

Drivers: 120-277V

WF (Small)

15W: 120V: 0.1245A, 277V: 0.0733A

22W: 120V: 0.1804A, 277V: 0.0954A


28W: 120V: 0.2264A, 277V: 0.1019A

Physical Characteristics


Dimensions

Version	Depth	Length	Width	Weight
Small	3.6"	7.63"	5.75"	4lbs


Top View

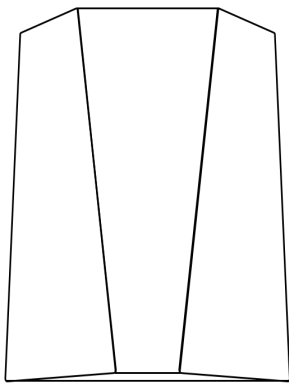


Side View

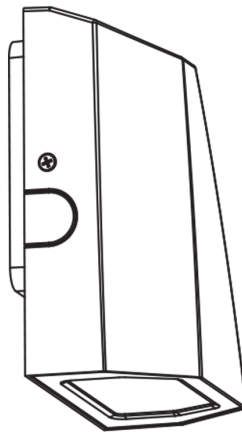

Bottom View

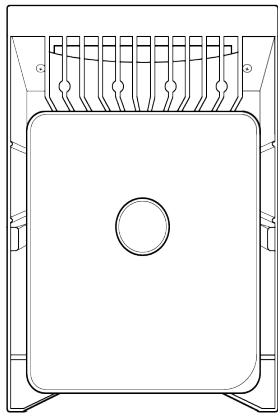

End View

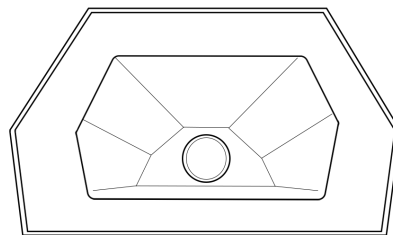

Notes