

Date:	Project:	Type:	Notes:	Catalog #:
-------	----------	-------	--------	------------

WFC-AOK SERIES Adjustable LED Full Cut-Off Wall Pack

The WFC-AOK Series is great for commercial and industrial applications. Field adjustable output and color options make the WFC-AOK the ideal choice for illuminating building perimeters where control of light spill is important. Adjustability includes five lumen outputs, three color temperatures in each of the three fixtures offered.



Small / Medium Version



Large Version

Features & Specifications

Applications

Ideal for use in exterior commercial and industrial building perimeters.

Construction

Housing made from die-cast aluminum. Polycarbonate lens.

Mounting

Wall Mount.

Electrical

Utilizes high-efficiency LED power supply and circuit boards. 120-277V standard. Multi-color switch (30K, 40K, 50K). Five lumen outputs selectable per fixture (10W - 1500lm - 150W - 21000lm). 50/60Hz, 0-10V dimming. <20% THD. 4 - 6Kv Surge Protection.

Beam Angle

100 Degree, Type III distribution.

Operating Temperature

Without Motion Sensor: -40C to +50C.

With Motion Sensor: -30C to +50C.

CRI

70+

Finish

Dark Bronze standard, Black or White with 100 piece MOQ - delivery 90 days.

Warranty

Five-year warranty. Terms and Conditions Apply. See warranty documentation for more information.

Certification

UL Wet Listed. DesignLights Consortium (DLC) 5.1 Premium Listed. IP65 Rated.



Performance Data

FSC Part #	Form Factor	Rated Wattage	Kelvin Temp	Delivered Lumens	Efficacy
WFC-S-5L-AOK	Small	10	3000	1460	146
		10	4000	1540	154
		10	5000	1510	151
		16	3000	2336	146
		16	4000	2464	154
		16	5000	2416	151
		24	3000	3456	144
		24	4000	3696	154
		24	5000	3552	148
		32	3000	4384	137
		32	4000	4800	150
		32	5000	4480	140
		40	3000	5160	129
		40	4000	5800	145
40	5000	5360	134		
WFC-M-11L-AOK	Medium	20	3000	2860	143
		20	4000	3060	153
		20	5000	2960	148
		32	3000	4384	137
		32	4000	4800	150
		32	5000	4480	140
		48	3000	6192	129
		48	4000	6960	145
		48	5000	6432	134
		64	3000	7744	121
		64	4000	9024	141
		64	5000	8128	127
		80	3000	9680	121
		80	4000	10960	137
80	5000	9840	123		
WFC-L-21L-AOK	Large	40	3000	6320	158
		40	4000	6640	166
		40	5000	6440	161
		60	3000	9120	152
		60	4000	9780	163
		60	5000	9420	157
		90	3000	12870	143
		90	4000	14220	158
		90	5000	13050	145
		120	3000	15960	133
		120	4000	18120	151
		120	5000	16320	136
		150	3000	18600	124
		150	4000	21600	144
150	5000	19350	129		

Catalog Ordering

Sample Part # WFC-S-5L-AOK




1 - Series	2 - Module	3 - Type	4 - Finish
WFC	S-5L (Small / 10W-15W-25W-32W-40W) M-11L (Medium / 20W-32W-55W-65W-80W) L-21L (Large / 40W-60W-90W-120W-150W)	AOK (Adjustable Output and Kelvin Temp 30K, 40K, 50K)	Blank (Standard - Dark Bronze) B (Black) ¹ W (White) ¹

5 - Options	6 - Accessories
Blank (Integrated DC Photocell) OS-PW (Wet Location PIR Programmable Occupancy Sensor)	EM15W (Emergency Battery Back-Up 15W)

Dimensions

Version	Depth	Length	Height	Weight
Small	6 9/16"	14 3/16"	9 5/16"	6.8 lbs
Medium	6 9/16"	14 3/16"	9 5/16"	7.5 lbs
Large	9 5/8"	14 3/16"	9 5/16"	11 lbs

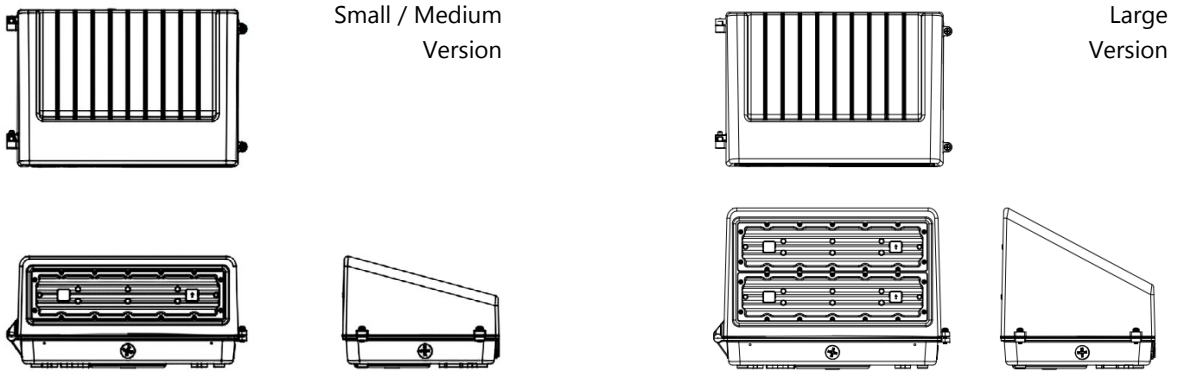

Notes

1 - 100 piece MOQ and 90 Days Delivery