

Date:	Project:	Type:	Notes:	Catalog #:
-------	----------	-------	--------	------------

## WM-AOK SERIES Adjustable LED Mini Wall Pack

Rev: 12-2022

The WM-AOK Series is great for commercial and industrial applications. Adjustable output and color temperature options makes the WM-AOK the ideal choice for illuminating building perimeters.



### Applications

Ideal for use in exterior commercial and industrial building perimeters.

### Construction

Housing made from die-cast aluminum. Polycarbonate lens.

### Mounting

Wall Mount.

### Electrical

Utilizes high-efficiency LED power supply and circuit boards.  
120-277V & 0-10V dimming standard. 50/60HZ input frequency.  
4KV Surge Protection.

### Operating Temperature

Suitable for -40°C – 40°C Ambient

### CRI

70+

### Finish

Standard in dark bronze.

### Warranty

Five-year warranty. Terms and Conditions Apply. See warranty documentation for more information.

### Certification

UL Wet Listed. Adheres to LM79, LM80 and TM21 industry standards.  
DesignLights Consortium® (DLC) 5.1 Premium listed. IP65 Rated.



## Catalog Ordering

Sample Part #WM-3L-AOK

Series	Lumens	Type	Finish
<b>WM</b>			
<b>WM</b>	<b>3L (12W-18W-26W)</b>	<b>AOK (Adjustable Output and Kelvin Temp 30K, 40K &amp; 50K)</b>	<b>Blank (Standard Dark Bronze)</b>

## Performance Data

FSC Part #	Rated Wattage	Kelvin Temp	Delivered Lumens	Efficacy	CRI	Replaces	
WM-3L-AOK	12	3000	2009	159	>70	2 x 13W Compact Fluorescent	
	12	4000	2116	170	>70		
	12	5000	2061	160	>70		
	18	18	3000	2745	152	>70	2 x 18W Compact Fluorescent
		18	4000	3057	164	>70	
		18	5000	2936	150	>70	
	26	26	3000	3831	141	>70	50W High Pressure Sodium
		26	4000	4100	156	>70	
		26	5000	3861	138	>70	

## Electrical Data

Drivers: 120-277V

WM (Small)

12W: 120V: 0.105A, 277V: 0.048A

18W: 120V: 0.16A, 277V: 0.071A


26W: 120V: 0.22A, 277V: 0.10A

Physical Characteristics


**Dimensions**

Version	Depth	Length	Width	Weight
Small	3.6"	9.6"	6.02"	3.08 lbs

Front View

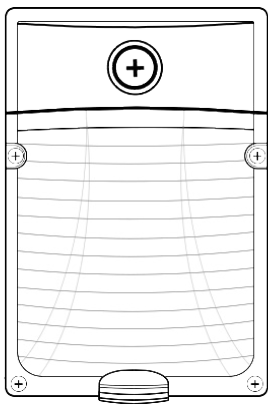

Back View

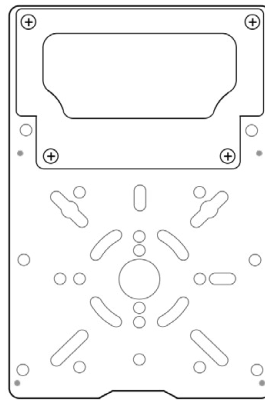

Side View

