

Date:	Project:	Type:	Notes:	Catalog #:
-------	----------	-------	--------	------------

WM-AOK SERIES Adjustable LED Mini Wall Pack

The WM-AOK Series is great for commercial and industrial applications. Adjustable output and color temperature options makes the WM-AOK the ideal choice for illuminating building perimeters.



Applications

Ideal for use in exterior commercial and industrial building perimeters.

Construction

Housing made from die-cast aluminum. Polycarbonate lens.

Mounting

Wall Mount.

Electrical

Utilizes high-efficiency LED power supply and circuit boards.
120-277V & 0-10V dimming standard. 50/60HZ input frequency.
4KV Surge Protection.

Operating Temperature

Suitable for -40°C – 40°C Ambient

CRI

70+

Finish

Standard in dark bronze.

Warranty

Five-year warranty. Terms and Conditions Apply. See warranty documentation for more information.

Certification

UL Wet Listed. Adheres to LM79, LM80 and TM21 industry standards.
DesignLights Consortium® (DLC) Pending. IP65 Rated.



Catalog Ordering

Sample Part #WM-S-3L-AOK

Series	Size & Lumens	Type	Finish	Controls
WM				
WM	S-3L (Small / 12W-18W-26W)	AOK (Adjustable Output and Kelvin Temp 30K, 40K & 50K)	Blank (Standard Dark Bronze)	Blank (120-277V Built-in Photocell)

Performance Data

Electrical Data

FSC Part #	Form Factor	Rated Wattage	Kelvin Temp	Delivered Lumens	Efficacy	CRI
WM-S-3L-AOK	Small	12	3000	2009	159	>70
		12	4000	2116	170	>70
		12	5000	2061	160	>70
		18	3000	2745	152	>70
		18	4000	3057	164	>70
		18	5000	2936	150	>70
		26	3000	3831	141	>70
		26	4000	4100	156	>70
		26	5000	3861	138	>70

Drivers: 120-277V

WM (Small)

12W: 120V: 0.105A, 277V: 0.048A

18W: 120V: 0.16A, 277V: 0.071A


26W: 120V: 0.22A, 277V: 0.10A

Physical Characteristics


Dimensions

Version	Depth	Length	Width	Weight
Small	3.6"	9.6"	6.02"	3.08 lbs

Front View

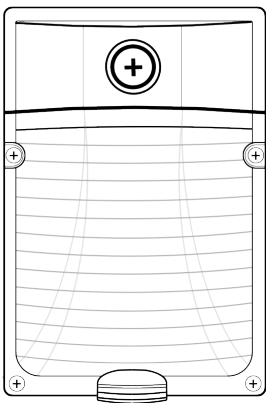

Back View

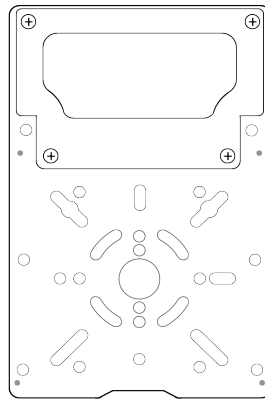

Side View



Notes