

Date:	Project:	Type:	Notes:	Catalog #:
-------	----------	-------	--------	------------

## WP-AOK SERIES Adjustable LED Wall Pack

The WP-AOK Series is great for commercial and industrial applications. Adjustable output and color temperature options makes the WP-AOK the ideal choice for illuminating building perimeters.



### Applications

Ideal for use in exterior commercial and industrial building perimeters.

### Construction

Housing made from die-cast aluminum. Tempered glass lens.

### Mounting

Wall Mount.

### Electrical

Utilizes high-efficiency LED power supply and circuit boards.  
120-277V & 0-10V dimming standard. 50/60HZ input frequency.  
5KV Surge Protection.

### Operating Temperature

Suitable for -40°C – 40°C Ambient

### CRI

70+

### Finish

Standard in dark bronze. Black and white available on special request.

### Warranty

Five-year warranty. Terms and Conditions Apply. See warranty documentation for more information.

### Certification

UL Wet Listed. Adheres to LM79, LM80 and TM21 industry standards.  
DesignLights Consortium® (DLC) 5.1 Premium¹.



## Catalog Ordering

Sample Part #WP-L-15L-AOK

Series	Size & Lumens	Type	Finish	Options
WP				

**WP**   
 **S-5L** (Small / 20W-30W-40W)   
 **AOK** (Adjustable Output and Kelvin Temp 30K, 40K & 50K)   
**Blank** (Standard Dark Bronze)   
**OSW** (Wet Location Occupancy Sensor)  
**M-10L** (Medium / 50W-70W-90W)   
**B** (Black)  
**L-15L** (Large / 80W-100W-120W)   
**W** (White)

## Performance Data

## Electrical Data

FSC Part #	Form Factor	Rated Wattage	Kelvin Temp	Delivered Lumens	Efficacy	CRI
WP-S-5L-AOK	Small	20	3000	2680	136	>70
		20	4000	2751	143	>70
		20	5000	2719	139	>70
		30	3000	4049	130	>70
		30	4000	4236	141	>70
		30	5000	4116	133	>70
		40	3000	5112	125	>70
		40	4000	5395	137	>70
		40	5000	5169	127	>70
WP-M-10L-AOK	Medium	50	3000	6849	133	>70
		50	4000	7121	143	>70
		50	5000	6901	135	>70
		70	3000	8379	130	>70
		70	4000	8748	140	>70
		70	5000	8404	131	>70
		90	3000	11199	123	>70
		90	4000	11798	134	>70
		90	5000	11334	124	>70
WP-L-15L-AOK	Large	80	3000	10690	131	>70
		80	4000	10848	145	>70
		80	5000	10555	131	>70
		100	3000	12897	125	>70
		100	4000	13412	137.69	>70
		100	5000	12991	128.22	>70
		120	3000	15438	123.25	>70
		120	4000	16546	137.24	>70
		120	5000	15491	125.77	>70

### Drivers: 120-277V

#### WP (Small)

20W: 120V: 0.1669A, 277V: 0.1017A  
 30W: 120V: 0.2303A, 277V: 0.1235A  
 40W: 120V: 0.3352A, 277V: 0.1575A

#### WP (Medium)

50W: 120V: 0.4198A, 277V: 0.2485A  
 70W: 120V: 0.5229A, 277V: 0.2782A  
 90W: 120V: 0.7384A, 277V: 0.3323A

#### WP (Large)


80W: 120V: 0.6653A, 277V: 0.3918A  
 100W: 120V: 0.8335A, 277V: 0.4417A  
 120W: 120V: 1.0154A, 277V: 0.4575A

Physical Characteristics


**Dimensions**

Version	Depth	Length	Width	Weight
Small	4.75"	9.00"	9.00"	5.3lbs
Medium	4.75"	9.00"	13.00"	7.6lbs
Large	4.75"	9.00"	17.00"	11.8lbs


Front View

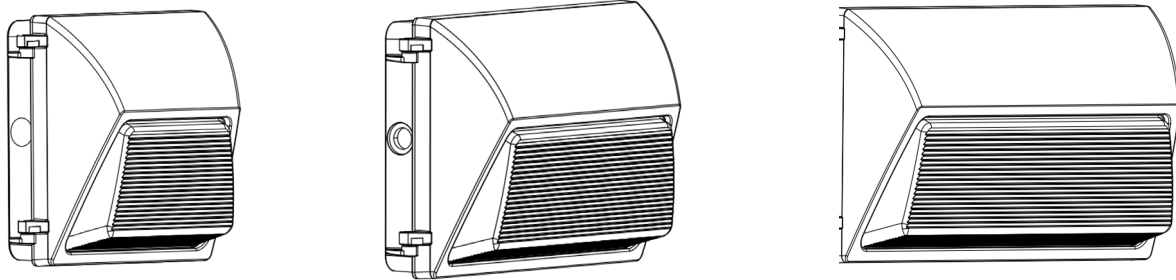

Back View

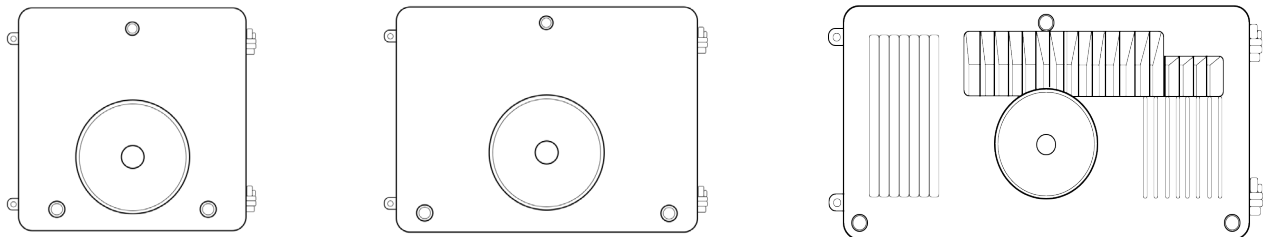

Side View

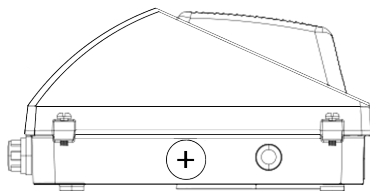

Notes

1 Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org](http://www.designlights.org) to confirm which versions are qualified.