

Date:	Project:	Type:	Notes:	Catalog #:
-------	----------	-------	--------	------------

**WP-AOK SERIES Adjustable LED Wall Pack**

Rev: 12-2022

The WP-AOK Series is great for commercial and industrial applications. Adjustable output and color temperature options makes the WP-AOK the ideal choice for illuminating building perimeters.



**Applications**

Ideal for use in exterior commercial and industrial building perimeters.

**Construction**

Housing made from die-cast aluminum. Tempered glass lens.

**Mounting**

Wall Mount.

**Electrical**

Utilizes high-efficiency LED power supply and circuit boards. 120-277V & 0-10V dimming standard. 50/60HZ input frequency. 5KV Surge Protection.

**Operating Temperature**

Suitable for -40°C – 40°C Ambient

**CRI**

70+

**Finish**

Standard in dark bronze. Black and white available on special request.

**Lumen Maintenance**

L70 rating of 54,000

**Warranty**

Five-year warranty. Terms and Conditions Apply. See warranty documentation for more information.

**Certification**

UL Wet Listed. Adheres to LM79, LM80 and TM21 industry standards. DesignLights Consortium® (DLC) 5.1 Premium listed!



## Catalog Ordering

Sample Part #WP-L-15L-AOK

Series	Size & Lumens	Type	Finish	Controls	Options
<b>WP</b>					
<b>WP</b>	<b>S-5L</b> (Small / 20W-30W-40W) <b>M-10L</b> (Medium / 50W-70W-90W) <b>L-15L</b> (Large / 80W-100W-120W)	<b>AOK</b> (Adjustable Output and Kelvin Temp 30K, 40K & 50K)	<b>Blank</b> (Standard Dark Bronze) <b>B</b> (Black) <sup>2</sup> <b>W</b> (White) <sup>2</sup>	<b>OSW</b> (Wet Location Occupancy Sensor)	<b>EM20W</b> (WP-L Battery Backup, 20 Watts, ~2,460 lumens) <sup>4</sup>

## Electrical Data

### Drivers: 120-277V

#### WP (Small)

20W: 120V: 0.1669A, 277V: 0.1017A

30W: 120V: 0.2303A, 277V: 0.1235A

40W: 120V: 0.3352A, 277V: 0.1575A

#### WP (Medium)

50W: 120V: 0.4198A, 277V: 0.2485A

70W: 120V: 0.5229A, 277V: 0.2782A

90W: 120V: 0.7384A, 277V: 0.3323A

#### WP (Large)

80W: 120V: 0.6653A, 277V: 0.3918A

100W: 120V: 0.8335A, 277V: 0.4417A

120W: 120V: 1.0154A, 277V: 0.4575A

## Performance Data


FSC Part #	Form Factor	Rated Wattage	Kelvin Temp	Delivered Lumens	Efficacy	CRI	Replace
WP-S-5L-AOK	Small	20	3000	2680	136	>70	2 x 13W Compact Fluorescent
		20	4000	2751	143	>70	
		20	5000	2719	139	>70	
		30	3000	4049	130	>70	50W High Pressure Sodium
		30	4000	4236	141	>70	
		30	5000	4116	133	>70	
		40	3000	5112	125	>70	70W High Pressure Sodium
		40	4000	5395	137	>70	
40	5000	5169	127	>70			
WP-M-10L-AOK	Medium	50	3000	6849	133	>70	70W High Pressure Sodium
		50	4000	7121	143	>70	
		50	5000	6901	135	>70	
		70	3000	8379	130	>70	100W Metal Halide
		70	4000	8748	140	>70	
		70	5000	8404	131	>70	
		90	3000	11199	123	>70	175W Metal Halide
		90	4000	11798	134	>70	
90	5000	11334	124	>70			
WP-L-15L-AOK	Large	80	3000	10690	131	>70	175W Metal Halide
		80	4000	10848	145	>70	
		80	5000	10555	131	>70	
		100	3000	12897	125	>70	175W Metal Halide
		100	4000	13412	137	>70	
		100	5000	12991	128	>70	
		120	3000	15438	123	>70	250W Metal Halide
		120	4000	16546	137	>70	
120	5000	15491	125	>70			

## Physical Characteristics


### Dimensions

Version	Depth	Length	Width	Weight
Small	4.75"	9.00"	9.00"	5.3lbs
Medium	4.75"	9.00"	13.00"	7.6lbs
Large	4.75"	9.00"	17.00"	11.8lbs


### Front View

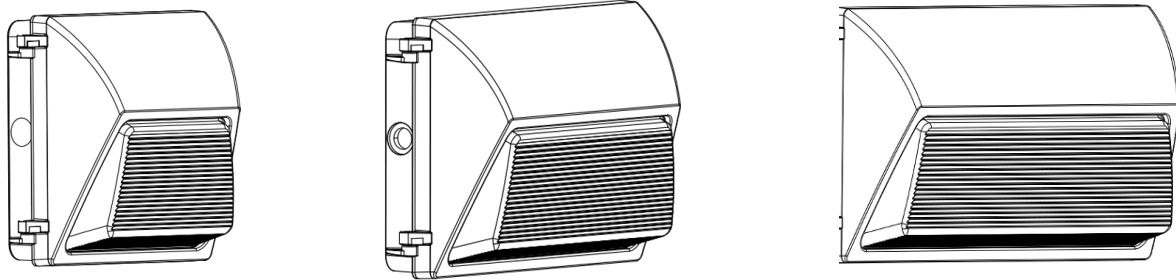

### Back View

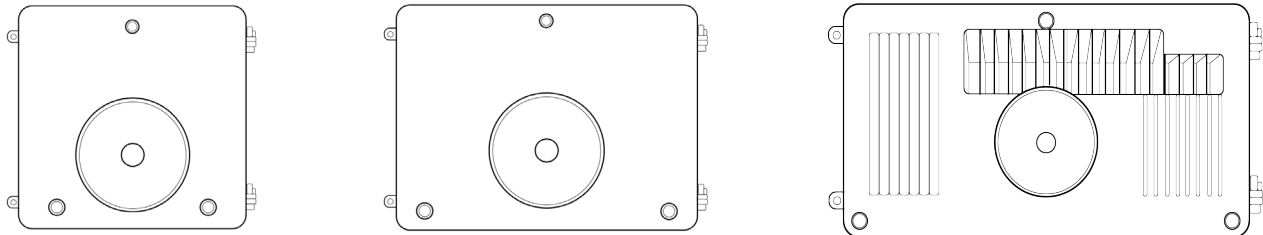

### Side View

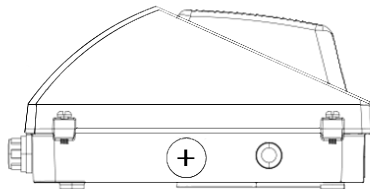

## Notes

- 1 Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/](http://www.designlights.org/) to confirm which versions are qualified.
- 2 Special order. MOQ 100 pieces. Contact factory for lead time.
- 3 Option only available for WP-M fixture.
- 4 Option only available for WP-L fixture.