

Date:	Project:	Type:	Notes:	Catalog #:
-------	----------	-------	--------	------------

**CP-AOK SERIES Adjustable LED Canopy**

Rev: 12-2022

The CP-AOK Series is great for commercial and industrial applications. Adjustable output and color temperature options makes the CP-AOK canopy light the ideal solution in building entrances and drive-through entryways and provide added visibility for pedestrians and vehicles.



**Applications**

Ideal for use in exterior commercial and industrial building entrances, drive-through entry ways, and overhangs in hotels, schools, offices, gas, and service stations.

**Construction**

Housing made from die-cast aluminum. Polycarbonate lens.

**Mounting**

Surface Mount.

**Electrical**

Utilizes high-efficiency LED power supply and circuit boards. 120-277V & 0-10V dimming standard. 50/60HZ input frequency. 6KV Surge Protection.

**Operating Temperature**

Suitable for -40°C – 40°C Ambient

**CRI**

70+

**Finish**

Standard in dark bronze.

**Warranty**

Five-year warranty. Terms and Conditions Apply. See warranty documentation for more information.

**Certification**

UL Wet Listed. Adheres to LM79, LM80 and TM21 industry standards. DesignLights Consortium® (DLC) 5.1 Premium listed. IP65 Rated.



## Catalog Ordering

Sample Part #CP-S-4L-AOK

Series	Size & Lumens	Type	Mounting	Finish	Controls
<b>CP</b>					
<b>CP</b>	<b>S-4L</b> (Small / 24W-32W-40W) <b>M-9L</b> (Medium / 45W-60W-75W)	<b>AOK</b> (Adjustable Output and Kelvin Temp 30K, 40K & 50K)	<b>Blank</b> (Surface Mount) <b>PD</b> (Pendant Mount)	<b>Blank</b> (Standard- Dark Bronze)	<b>OSW</b> (Wet Location Occupancy Sensor)

## Performance Data

FSC Part #	Form Factor	Rated Wattage	Kelvin Temp	Delivered Lumens	Efficacy	CRI	Replaces		
CP-S-4L-AOK	Small	24	3000	3160	135	>70	50W High Pressure Sodium		
		24	4000	3270	141	>70			
		24	5000	3259	136	>70			
		CP-S-4L-AOK	Small	32	3000	4278	131	>70	2 x 32W Compact Fluorescent
				32	4000	4455	139	>70	
				32	5000	4375	131	>70	2 x 42W Compact Fluorescent
				40	3000	5015	128	>70	
		CP-M-9L-AOK	Medium	45	3000	6601	144	>70	100W Metal Halide
45	4000			6976	155	>70			
45	5000			6722	141	>70			
CP-M-9L-AOK	Medium			60	3000	8137	135	>70	150W High Pressure Sodium
				60	4000	8708	148	>70	
				60	5000	8208	132	>70	175W Metal Halide
				75	3000	9375	129	>70	
CP-M-9L-AOK	Medium			75	4000	10121	145	>70	175W Metal Halide
		75	5000	9631	129	>70			

## Electrical Data

**Drivers: 120-277V**

**CP (Small)**

24W: 120V: 0.195A, 277V: 0.101A

32W: 120V: 0.270A, 277V: 0.131A

40W: 120V: 0.330A, 277V: 0.155A

**CP (Medium)**

45W: 120V: 0.380A, 277V: 0.163A

60W: 120V: 0.500A, 277V: 0.230A


75W: 120V: 0.590A, 277V: 0.280A

## Physical Characteristics


### Dimensions

Version	Depth	Length	Width	Weight
Small	3.35"	9.5"	9.5"	15.2 lbs
Medium	3.35"	9.5"	9.5"	16 lbs

Top View

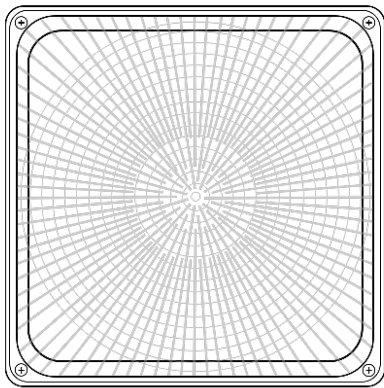

Side View

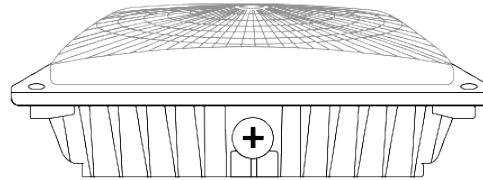

Back View

