

Date:	Project:	Type:	Notes:	Catalog #:
-------	----------	-------	--------	------------

## WP-AOK SERIES Adjustable LED Wall Pack

The WP-AOK Series is great for commercial and industrial applications. Field adjustable output and color options make the WP-AOK the ideal choice for illuminating building perimeters. Adjustability includes three lumen outputs, three color temperatures in each of the three fixtures offered.



### Features & Specifications

#### Applications

Ideal for use in exterior commercial and industrial building perimeters.

#### Construction

Housing made from die-cast aluminum. Glass diffuser.

#### Mounting

Wall Mount.

#### Electrical

Utilizes high-efficiency LED power supply and circuit boards. 120-277V standard. Multi-color switch (30K, 40K, 50K). Three lumen outputs selectable per fixture (15W - 2100lm - 120W - 16800lm) 50/60Hz, 0-10V dimming. <20% THD. 6Kv Surge Protection.

#### Beam Angle

105 Degree

#### Operating Temperature

Without Motion Sensor -40C to +50C.

With Motion Sensor -25C to +50C.

With Emergency 0C to +50C

#### CRI

80+

#### Finish

Dark Bronze standard, Black or White with 100 piece MOQ - delivery 90 days.

#### Warranty

Five-year warranty. Terms and Conditions Apply. See warranty documentation for more information.

#### Certification

UL Wet Listed. DesignLights Consortium (DLC) 5.1 Premium Listed. IP65 Rated.

### Performance Data

FSC Part #	Form Factor	Rated Wattage	Kelvin Temp	Delivered Lumens	Efficacy
WP-S-6L-AOK	Small	15	3000	2115	141
		15	4000	2265	151
		15	5000	2190	146
		25	3000	3450	138
		25	4000	3700	148
		25	5000	3575	143
		40	3000	5400	135
		40	4000	5800	145
WP-M-11L-AOK	Medium	40	5000	5600	140
		55	3000	7755	141
		55	4000	8305	151
		55	5000	8030	146
		65	3000	8970	138
		65	4000	9620	148
		65	5000	9295	143
		80	3000	10800	135
WP-L-16L-AOK	Large	80	4000	11600	145
		80	5000	11200	140
		70	3000	9870	141
		70	4000	10570	151
		70	5000	10220	146
		90	3000	12420	138
		90	4000	13320	148
		90	5000	12870	143
		120	3000	16200	135
		120	4000	17400	145
120	5000	16800	140		



Catalog Ordering

Sample Part # WP-L-16L-AOK

1	2	3	4	5	6
<b>WP</b>					
<b>1 - Series</b>	<b>2 - Module</b>	<b>3 - Type</b>	<b>4 - Finish</b>		
<b>WP</b>	<b>S-6L</b> (Small / 15W-25W-40W) <b>M-11L</b> (Medium / 55W-65W-80W) <b>L-16L</b> (Large / 70W-90W-120W)	<b>AOK</b> (Adjustable Output and Kelvin Temp 30K, 40K, 50K)	<b>Blank</b> (Standard - Dark Bronze) <b>BL</b> (Black) <sup>1</sup> <b>WH</b> (White) <sup>1</sup>		
<b>5 - Options</b>		<b>6 - Accessories</b>			
<b>Blank</b> (Integrated DC Photocell) <b>OS-PW</b> (Wet Location PIR Programmable Occupancy Sensor)		<b>EM8W</b> (Emergency Battery Back-Up 8W)			

Notes

1 - 100 piece MOQ and 90 Days Delivery

---


## Physical Characteristics

---


### Dimensions

Version	Depth	Width	Height	Weight
All Sizes	6.5"	14.2"	8.6"	7.5lb

Back View

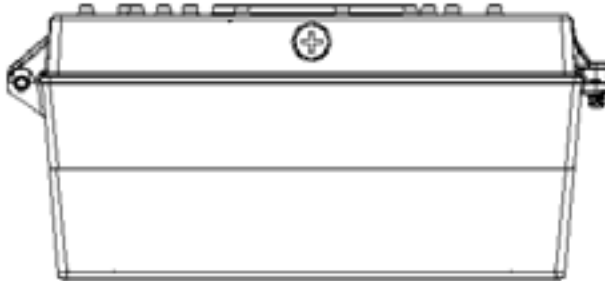

Front View

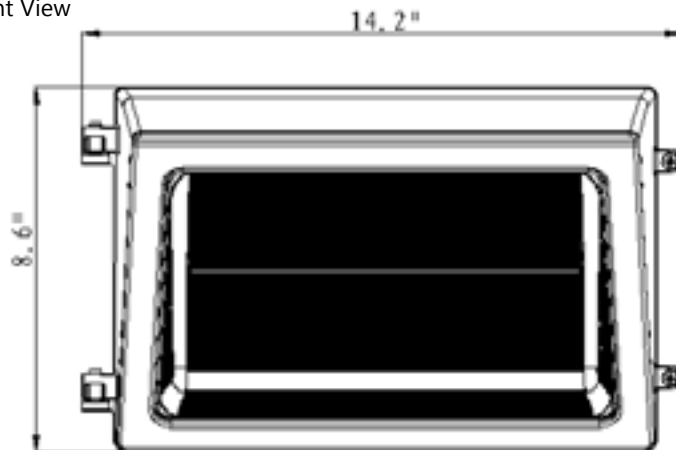

Side View

