


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.33V I:0.1951A P:23.434W PF:0.9979 Freq:59.98Hz Lamp Flux:3396.35x1 lm		
NAME: FPB-22-3500L-AOK-L-G2		
MFR.: EVERFINE		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 144.93 lm/W			
MODEL		I _{max} (cd)	1171	S/MH(C0/180)	1.27
NOMINAL POWER(W)	24	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	3396.4	η UP,DN(C0-180)	0.0,50.5
NOMINAL FLUX(lm)	3396.35	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.5
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120	η down(%)	100.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

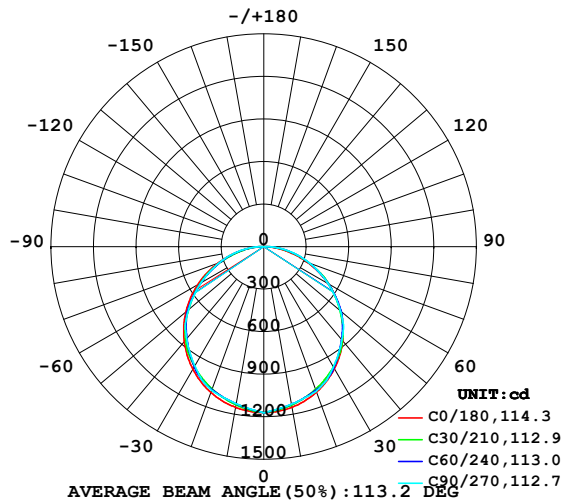

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

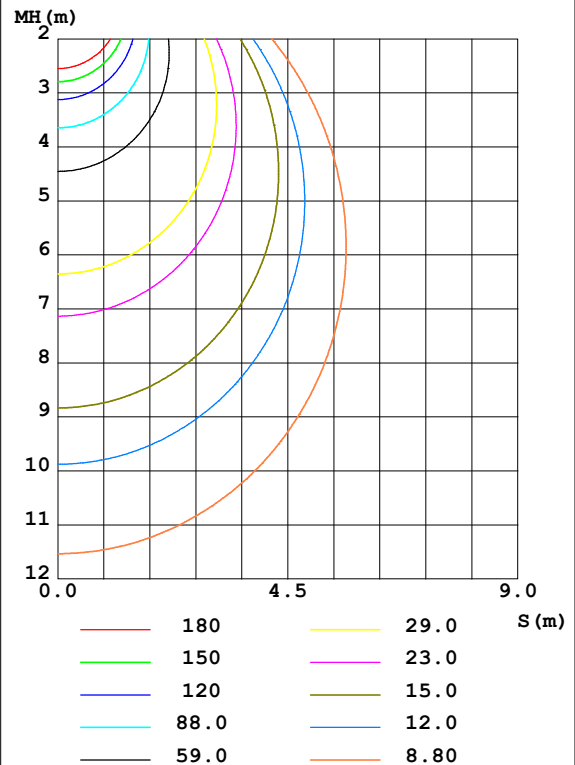

H(β) Range:-90 - 90DEG
H(β) Interval: 2.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-12-13

V(B) Range:-90 - 90DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:6.300m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1150	1130	1128	1131	1151	1128	1125	1128	0- 10	109.5	109.5	3.22,3.22
20	1092	1072	1085	1073	1094	1068	1079	1067	10- 20	312.5	422.0	12.4,12.4
30	996.2	990.8	982.0	992.0	999.7	983.7	972.9	982.6	20- 30	476.9	898.9	26.5,26.5
40	867.2	855.8	858.4	857.6	873.7	847.1	847.1	844.7	30- 40	576.2	1475	43.4,43.4
50	707.6	705.6	706.3	707.8	717.0	693.8	693.6	690.4	40- 50	603.1	2078	61.2,61.2
60	525.3	531.9	525.7	533.7	538.8	516.7	512.3	513.1	50- 60	548.6	2627	77.3,77.3
70	330.3	343.3	347.2	343.9	346.6	324.6	334.6	322.3	60- 70	424.3	3051	89.8,89.8
80	139.2	169.3	175.2	169.0	157.6	155.3	167.7	154.2	70- 80	260.0	3311	97.5,97.5
90	0.7616	4.261	3.254	3.422	0.9748	0.8945	0.8585	0.8544	80- 90	85.35	3396	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

$H(\beta)$ Range:-90 - 90DEG
 $H(\beta)$ Interval: 2.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-12-13

$V(B)$ Range:-90 - 90DEG
 $V(B)$ Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:6.300m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.33V I:0.1951A P:23.434W PF:0.9979 Freq:59.98Hz Lamp Flux:3396.35x1 lm		
NAME: FPB-22-3500L-AOK-L-G2		
MFR.: EVERFINE		

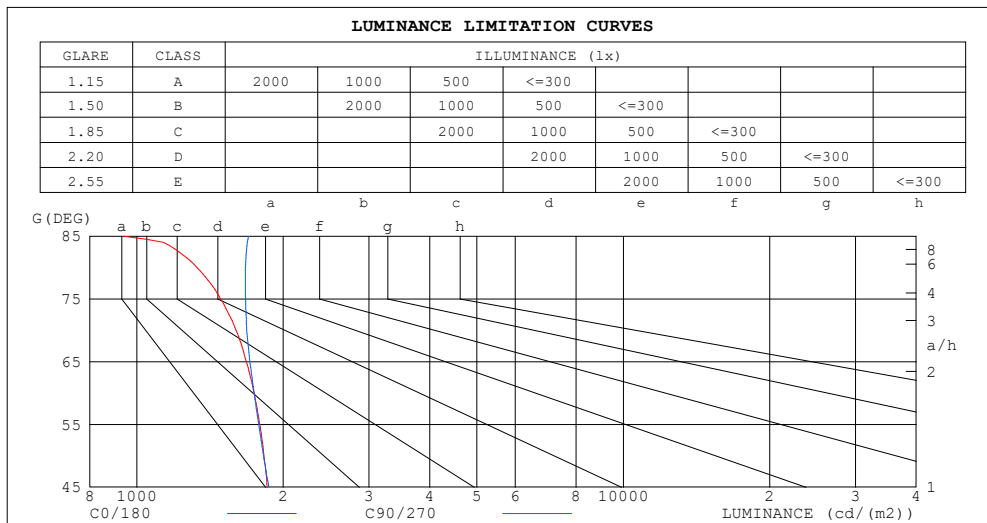

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	940	1698
80	1329	1673
75	1488	1673
70	1601	1683
65	1680	1708
60	1742	1743
55	1790	1781
50	1825	1822
45	1854	1868


H(β) Range:-90 - 90DEG
H(β) Interval: 2.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-12-13

V(B) Range:-90 - 90DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:6.300m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.33V I:0.1951A P:23.434W PF:0.9979 Freq:59.98Hz		
Lamp Flux:3396.35x1 lm		
NAME: FPB-22-3500L-AOK-L-G2		
MFR.: EVERFINE		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.03	.99	.95	1.01	.97	.93	.97	.93	.90	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.81	.76	.84	.79	.74	.81	.76	.72	.78	.74	.71	.69
3.0	.79	.70	.64	.77	.69	.63	.74	.67	.62	.71	.66	.61	.69	.64	.60	.57
4.0	.70	.61	.54	.68	.60	.53	.66	.58	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.45	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.44	.39	.50	.44	.39	.37
7.0	.51	.42	.35	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.34	.32
8.0	.46	.37	.32	.45	.37	.31	.44	.37	.31	.43	.36	.31	.42	.35	.31	.29
9.0	.42	.34	.28	.42	.34	.28	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.38	.31	.26	.37	.30	.25	.37	.30	.25	.36	.30	.25	.23

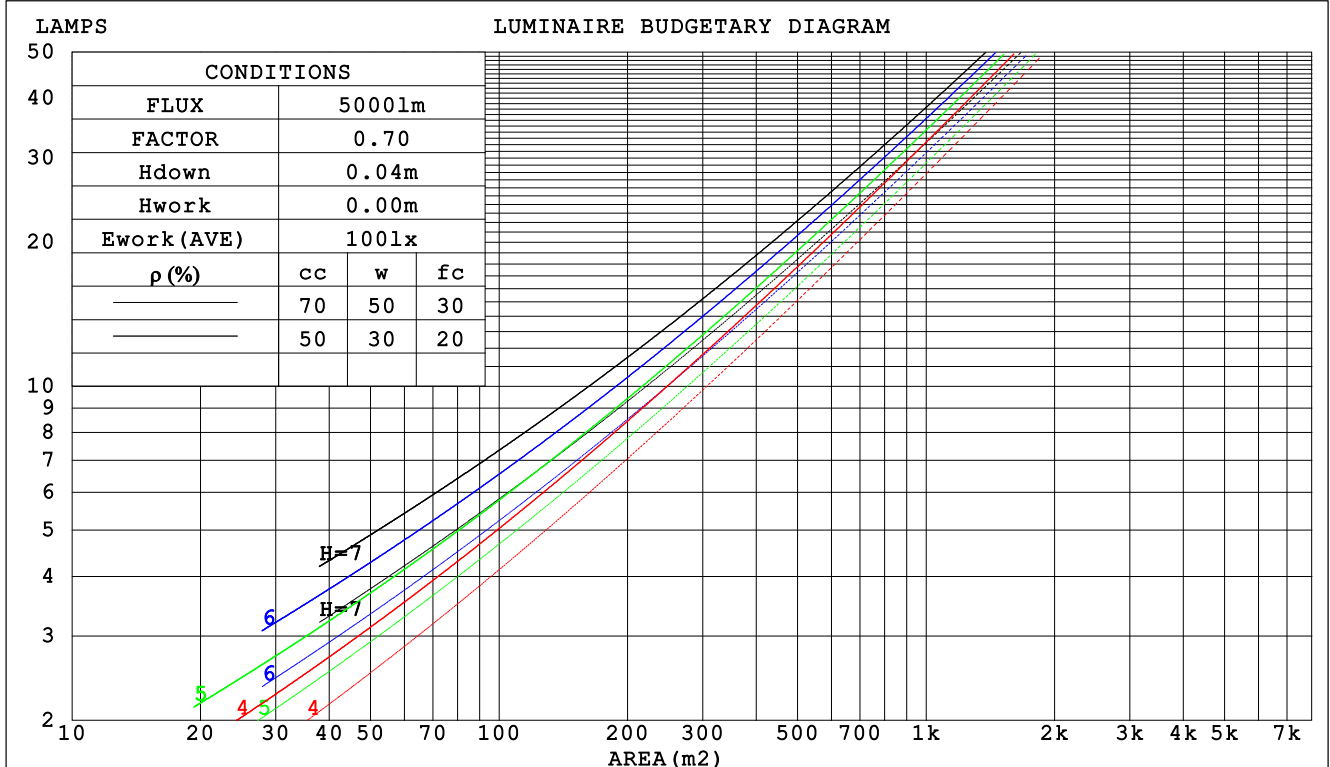

H(β) Range:-90 - 90DEG
H(β) Interval: 2.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-12-13

V(B) Range:-90 - 90DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:6.300m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.33V I:0.1951A P:23.434W PF:0.9979 Freq:59.98Hz											
Lamp Flux:3396.35x1 lm											
NAME: FPB-22-3500L-AOK-L-G2											
MFR.: EVERFINE											

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.320	.182	.058	.313	.179	.057	.300	.172	.055	.288	.166	.053	.276	.160	.052	
2.0	.299	.164	.050	.292	.161	.050	.280	.156	.048	.270	.151	.047	.260	.147	.046	
3.0	.275	.146	.044	.269	.144	.043	.259	.140	.043	.249	.137	.042	.240	.133	.041	
4.0	.253	.131	.039	.248	.130	.038	.239	.127	.038	.230	.124	.037	.222	.121	.037	
5.0	.233	.119	.034	.229	.117	.034	.221	.115	.034	.213	.112	.033	.206	.110	.033	
6.0	.216	.108	.031	.212	.107	.031	.205	.105	.031	.198	.103	.030	.192	.101	.030	
7.0	.201	.099	.028	.197	.098	.028	.191	.096	.028	.185	.095	.028	.179	.093	.027	
8.0	.187	.091	.026	.184	.091	.026	.178	.089	.025	.173	.088	.025	.168	.086	.025	
9.0	.175	.085	.024	.173	.084	.024	.167	.083	.023	.162	.081	.023	.158	.080	.023	
10.0	.165	.079	.022	.162	.078	.022	.158	.077	.022	.153	.076	.022	.149	.075	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.181	.156	.134	.155	.134	.115	.106	.092	.079	.061	.053	.046	.020	.017	.015	
2.0	.173	.132	.097	.148	.114	.084	.102	.079	.059	.059	.046	.034	.019	.015	.011	
3.0	.165	.114	.074	.142	.099	.064	.097	.069	.045	.056	.040	.026	.018	.013	.009	
4.0	.158	.101	.058	.135	.087	.050	.093	.061	.035	.054	.036	.021	.017	.012	.007	
5.0	.150	.091	.047	.129	.078	.041	.089	.055	.029	.051	.032	.017	.017	.011	.006	
6.0	.143	.082	.039	.123	.071	.034	.085	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.136	.075	.033	.117	.065	.029	.081	.046	.020	.047	.027	.012	.015	.009	.004	
8.0	.130	.070	.029	.112	.060	.025	.077	.042	.018	.045	.025	.011	.015	.008	.003	
9.0	.123	.065	.025	.106	.056	.022	.074	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.118	.060	.022	.101	.052	.019	.070	.037	.014	.041	.022	.008	.013	.007	.003	

H(β) Range:-90 - 90DEG
H(β) Interval: 2.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-12-13

V(B) Range:-90 - 90DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:6.300m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.33V I:0.1951A P:23.434W PF:0.9979 Freq:59.98Hz										
Lamp Flux:3396.35x1 lm										
NAME: FPB-22-3500L-AOK-L-G2										
MFR.: EVERFINE										
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	10.6	12.2	10.9	12.4	12.6	10.7	12.2	10.9	12.4	12.6
3H	12.2	13.7	12.5	13.9	14.1	12.3	13.7	12.6	14.0	14.2
4H	12.9	14.2	13.2	14.5	14.7	13.0	14.4	13.4	14.7	14.9
6H	13.3	14.6	13.7	14.9	15.2	13.7	14.9	14.0	15.2	15.5
8H	13.5	14.7	13.8	15.0	15.3	13.9	15.1	14.2	15.4	15.7
12H	13.5	14.7	13.9	15.0	15.3	14.1	15.3	14.4	15.6	15.9
4H 2H	11.3	12.7	11.6	12.9	13.2	11.3	12.7	11.6	12.9	13.2
3H	13.1	14.3	13.4	14.6	14.9	13.1	14.3	13.5	14.6	14.9
4H	13.9	15.0	14.2	15.3	15.6	14.0	15.1	14.4	15.4	15.8
6H	14.5	15.5	14.9	15.8	16.2	14.8	15.8	15.2	16.1	16.5
8H	14.7	15.6	15.1	16.0	16.4	15.1	16.0	15.5	16.4	16.8
12H	14.8	15.6	15.2	16.0	16.4	15.3	16.2	15.8	16.6	17.0
8H 4H	14.2	15.1	14.6	15.5	15.9	14.3	15.2	14.8	15.6	16.0
6H	15.0	15.8	15.5	16.2	16.6	15.3	16.1	15.7	16.5	16.9
8H	15.3	16.0	15.8	16.4	16.9	15.7	16.4	16.2	16.8	17.3
12H	15.5	16.1	16.0	16.6	17.0	16.1	16.7	16.6	17.1	17.6
12H 4H	14.2	15.1	14.7	15.5	15.9	14.4	15.2	14.8	15.6	16.0
6H	15.1	15.8	15.6	16.2	16.7	15.4	16.1	15.8	16.5	16.9
8H	15.5	16.1	16.0	16.5	17.0	15.9	16.4	16.3	16.9	17.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 3396 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 4.2)
Area: 0.603098 m2

H(β) Range:-90 - 90DEG
H(β) Interval: 2.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-12-13

V(B) Range:-90 - 90DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:6.300m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.33V I:0.1951A P:23.434W PF:0.9979 Freq:59.98Hz		
Lamp Flux:3396.35x1 lm		
NAME: FPB-22-3500L-AOK-L-G2		
MFR.: EVERFINE		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	47	64	54	47	40
1.00	75	64	57	74	63	56	72	65	56	48
1.25	82	72	64	81	71	64	78	69	63	56
1.50	87	77	70	86	76	70	83	75	69	61
2.00	94	86	79	92	84	78	89	82	77	69
2.50	98	90	84	96	89	83	92	86	81	73
3.00	102	95	89	99	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	97	101	98	94	85
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

$H(\beta)$ Range:-90 - 90DEG
 $H(\beta)$ Interval: 2.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-12-13

$V(B)$ Range:-90 - 90DEG
 $V(B)$ Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:6.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.33V I:0.1951A P:23.434W PF:0.9979 Freq:59.98Hz Lamp Flux:3396.35x1 lm		
NAME: FPB-22-3500L-AOK-L-G2		
MFR.: EVERFINE		

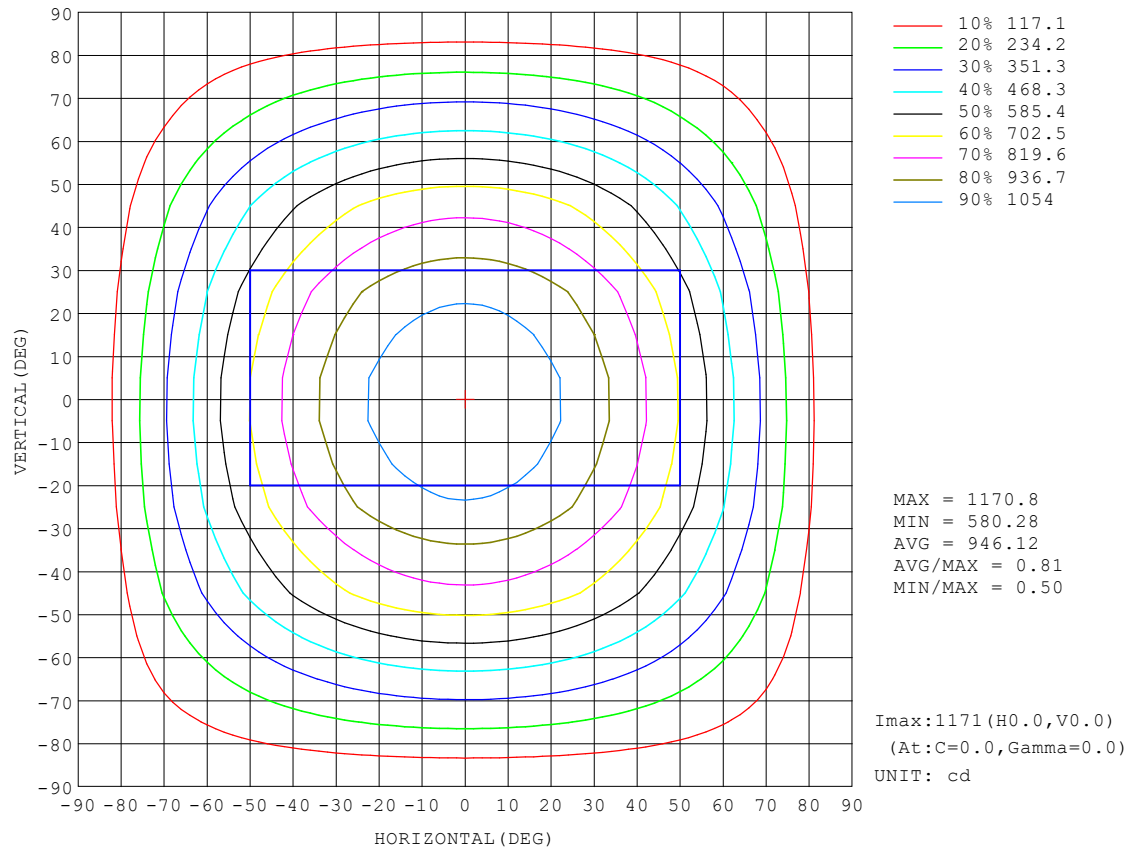


H(β) Range:-90 - 90DEG
H(β) Interval: 2.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-12-13

V(B) Range:-90 - 90DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:6.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.33V I:0.1951A P:23.434W PF:0.9979 Freq:59.98Hz Lamp Flux:3396.35x1 lm		
NAME: FPB-22-3500L-AOK-L-G2		
MFR.: EVERFINE		

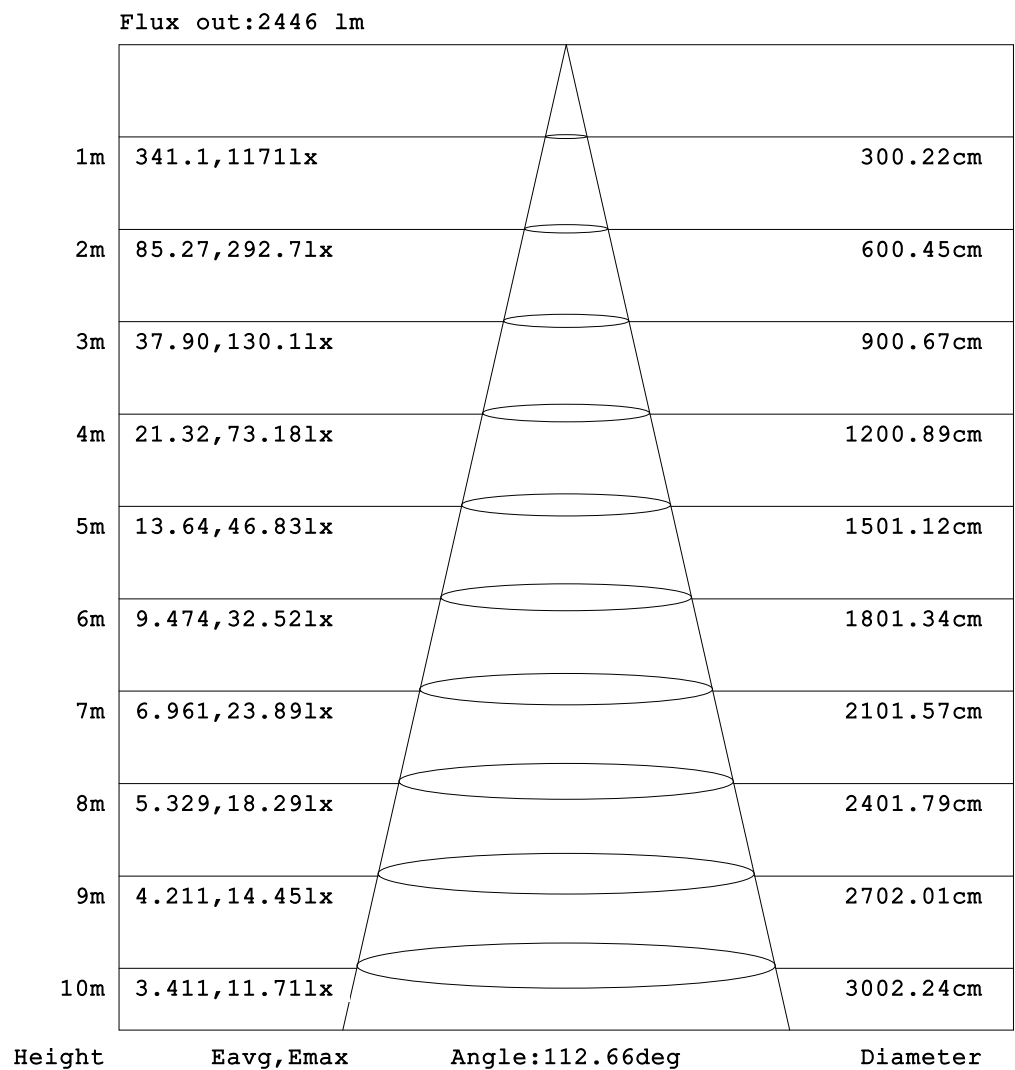


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 2.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-12-13

V(B) Range:-90 - 90DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:6.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.33V I:0.1951A P:23.434W PF:0.9979 Freq:59.98Hz Lamp Flux:3396.35x1 lm		
NAME: FPB-22-3500L-AOK-L-G2		
MFR.: EVERFINE		

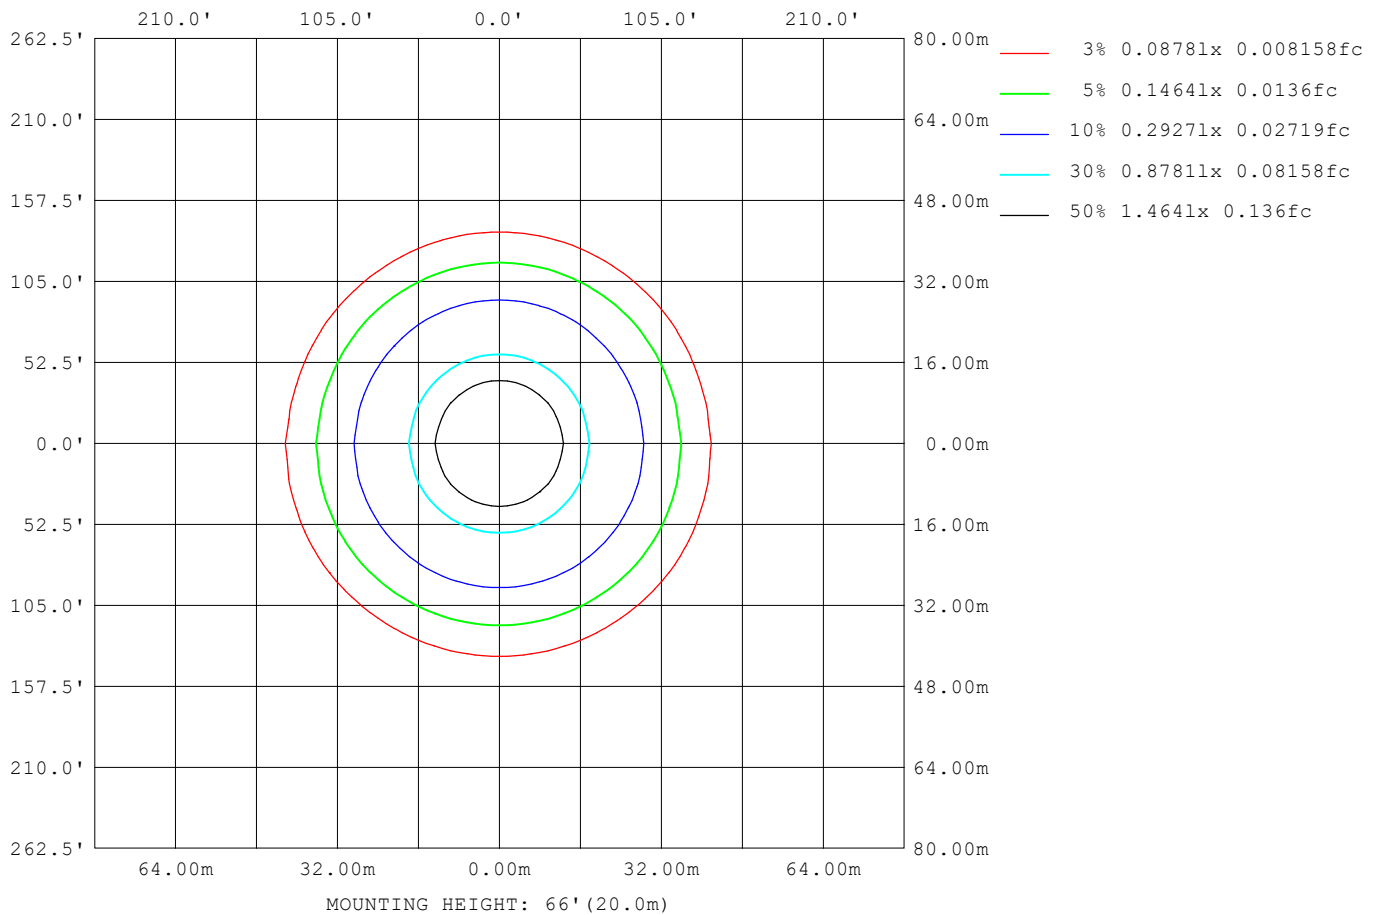

H(β) Range:-90 - 90DEG
H(β) Interval: 2.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-12-13

V(B) Range:-90 - 90DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:6.300m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.33V I:0.1951A P:23.434W PF:0.9979 Freq:59.98Hz Lamp Flux:3396.35x1 lm		
NAME: FPB-22-3500L-AOK-L-G2		
MFR.: EVERFINE		


AvgL	cd/m2
L_0~180 (65) av	1709
L_0~180 (75) av	1545
L_0~180 (85) av	1129
L_90~270 (65) av	1681
L_90~270 (75) av	1641
L_90~270 (85) av	1651
L_45 (65) av	1677
L_45 (75) av	1565
L_45 (85) av	1554

Standard: GB/T 29293-2012

H(β) Range:-90 - 90DEG
H(β) Interval: 2.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-12-13

V(B) Range:-90 - 90DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:6.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

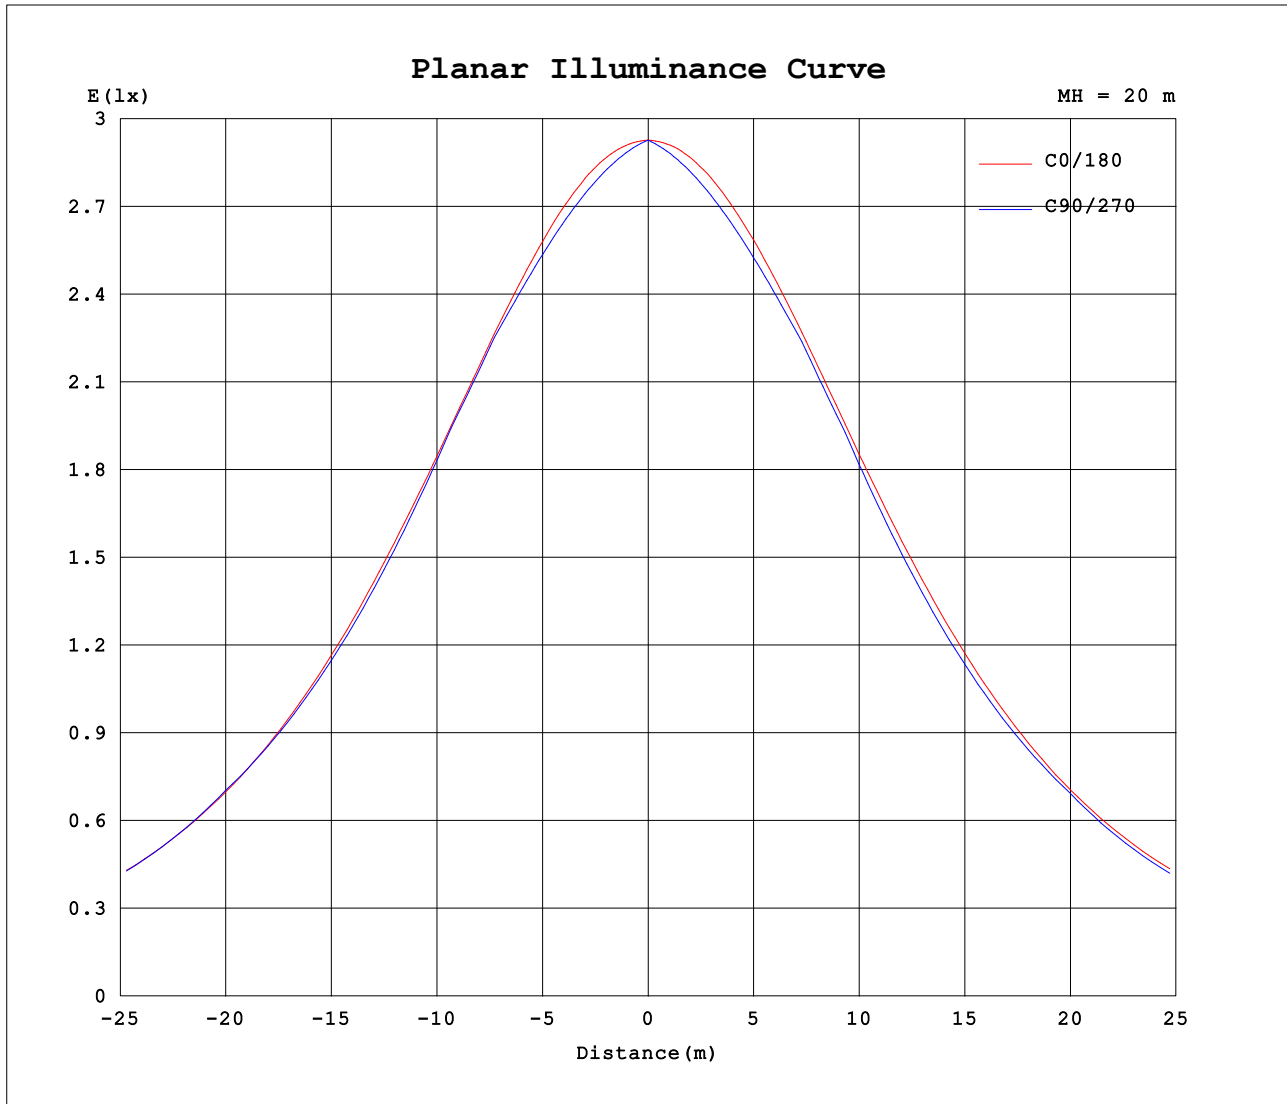

H(β) Range:-90 - 90DEG
H(β) Interval: 2.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-12-13

V(B) Range:-90 - 90DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:6.300m [K=1.0000]
Remarks:

```
V(B) Range:-90 - 90DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:6.300m [K=1.0000]
Remarks:
```

```
V(B) Range:-90 - 90DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:6.300m [K=1.0000]
Remarks:
```

```
V(B) Range:-90 - 90DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:6.300m [K=1.0000]
Remarks:
```

V(B) Range:-90 - 90DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:6.300m [K=1.0000]
Remarks: