

Report No.:

Test Time: 2025/1/9 09:59

Luminaire Property

Luminaire Manufacturer:
Luminaire Category:
Lamp Catalog:
Number of Lamps:
Luminous Length (mm):
Luminous Height (mm):
Current: 0.641 A
Power Factor: 0.989


Luminaire Description:
Lamp Description:
Lumens per Lamp:
Luminous Width (mm):
Voltage: 120.0 V
Power: 76.02 W

Photometric Results


IES Classification: Type I
Total Rated Lamp Lumens: 11106.5 lm
Efficiency: 100%
Upward Ratio: 0%
C0r0 Intensity: 8466.49 cd
Pos of Max. Intensity: H270 V4
Beam Angle(C0/C180,C90/C270,C45/C225,C135/315): 68.3, 63.0, 66.2, 67.3

Longitudinal Classification: Very Short
Measurement Flux: 11106.5 lm
Downward Ratio: 100%
Luminaire Efficacy Rating (LER): 146.15
Max. Intensity: 8493.79 cd

Picture Of Luminaire



Luminous Intensity Distribution Curve

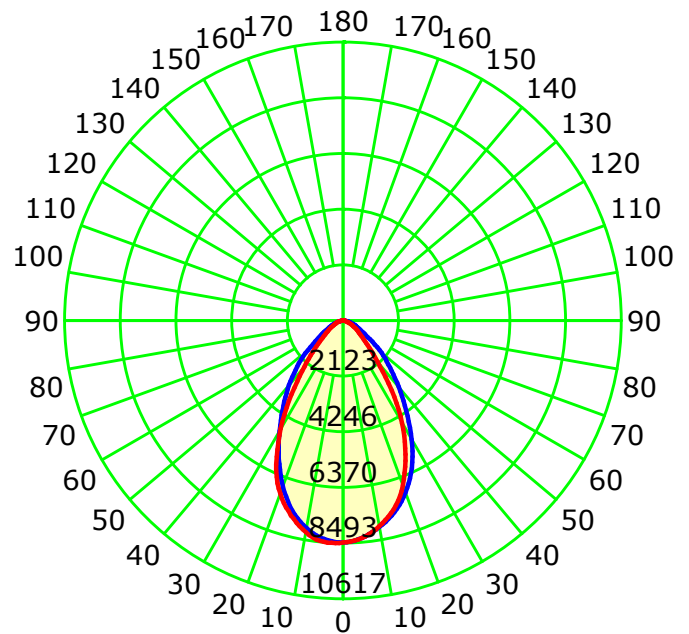

Unit: cd


Average Diffuse Angle(50%): 65.6°

— C0-C180 — C90-C270

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature: 25.0 'C
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-3000
Distance: 14.631 m [K=1.0000]
Humidity:
Inspector:


Photon Intensity Distribution Curve

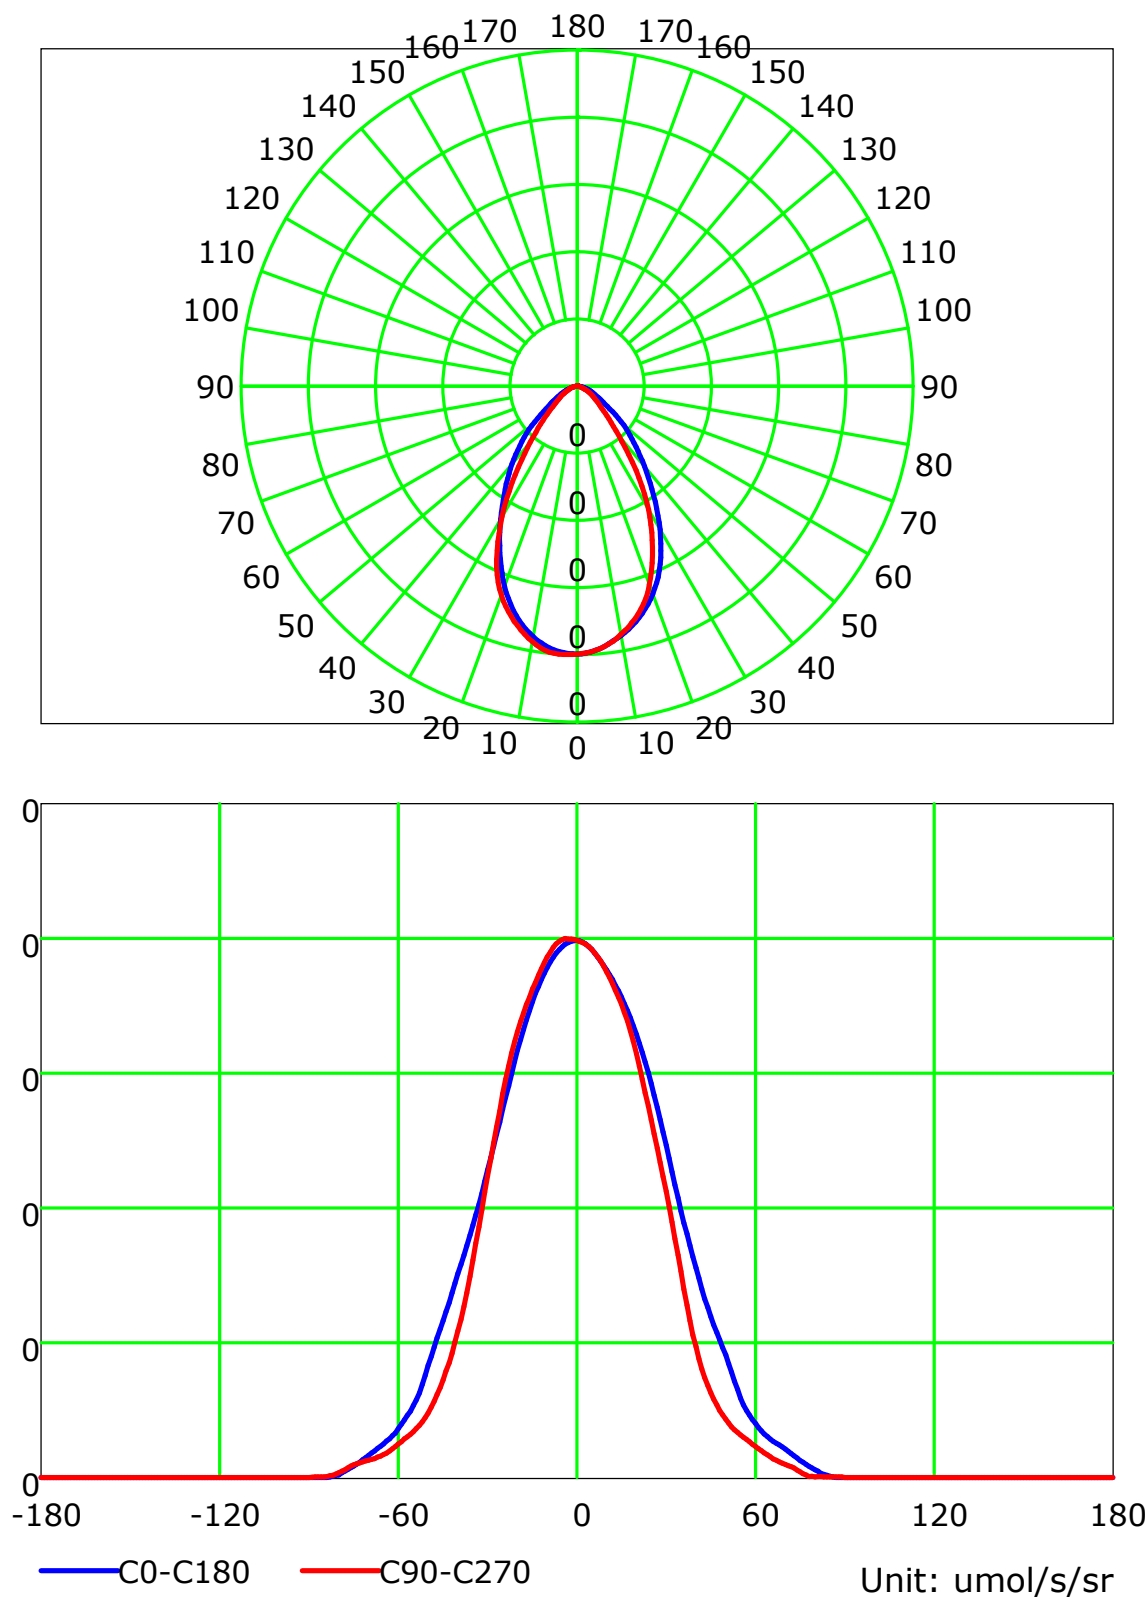

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature: 25.0 'C
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-3000
Distance: 14.631 m [K=1.0000]
Humidity:
Inspector:

Luminous Intensity Distribution Curve(cd/klm)

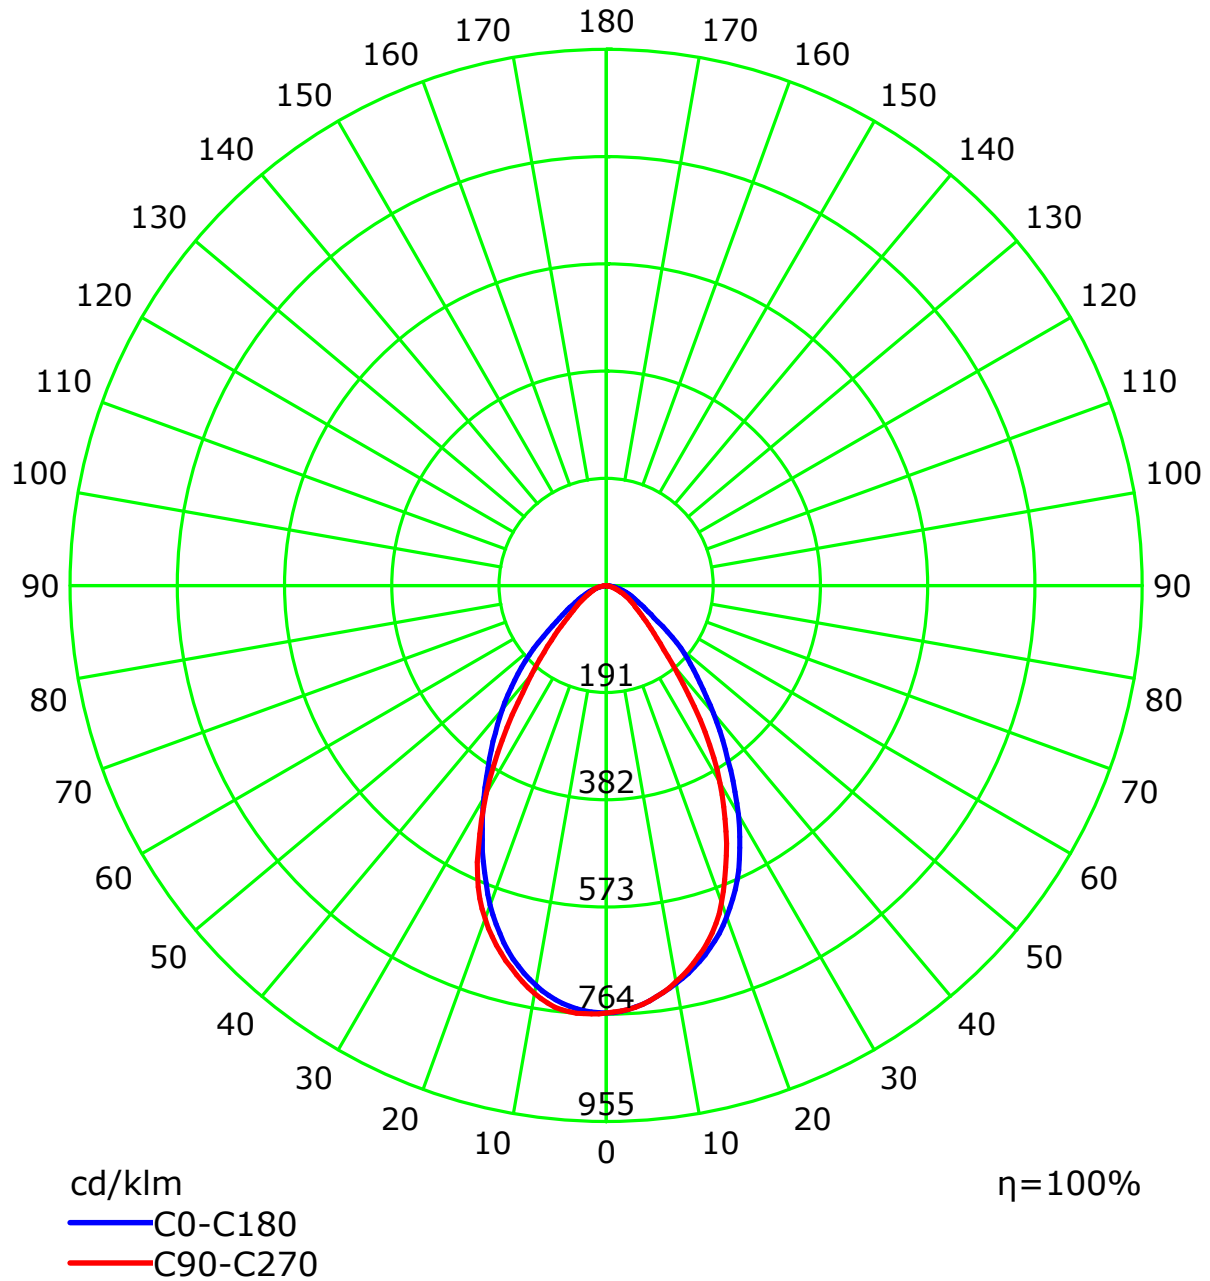

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature: 25.0 'C
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-3000
Distance: 14.631 m [K=1.0000]
Humidity:
Inspector:


Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1	1.12	1.09	1.06	1.03	1.09	1.06	1.04	1.01	1.02	1.00	0.98	0.99	0.97	0.95	0.95	0.94	0.92	0.90
2	1.05	0.99	0.94	0.90	1.02	0.97	0.92	0.88	0.94	0.90	0.87	0.91	0.87	0.85	0.88	0.85	0.83	0.81
3	0.98	0.90	0.84	0.79	0.96	0.89	0.83	0.78	0.86	0.81	0.77	0.83	0.79	0.76	0.81	0.77	0.75	0.73
4	0.92	0.82	0.76	0.70	0.90	0.81	0.75	0.70	0.79	0.73	0.69	0.77	0.72	0.68	0.75	0.71	0.67	0.66
5	0.86	0.76	0.69	0.63	0.84	0.75	0.68	0.63	0.73	0.67	0.62	0.71	0.66	0.62	0.69	0.65	0.61	0.59
6	0.80	0.70	0.63	0.57	0.79	0.69	0.62	0.57	0.67	0.61	0.57	0.66	0.60	0.56	0.64	0.60	0.56	0.54
7	0.76	0.65	0.57	0.52	0.74	0.64	0.57	0.52	0.62	0.56	0.52	0.61	0.56	0.52	0.60	0.55	0.51	0.50
8	0.71	0.60	0.53	0.48	0.70	0.59	0.53	0.48	0.58	0.52	0.48	0.57	0.52	0.48	0.56	0.51	0.47	0.46
9	0.67	0.56	0.49	0.44	0.66	0.55	0.49	0.44	0.54	0.48	0.44	0.53	0.48	0.44	0.53	0.47	0.44	0.42
10	0.64	0.52	0.46	0.41	0.63	0.52	0.45	0.41	0.51	0.45	0.41	0.50	0.45	0.41	0.49	0.44	0.41	0.39

Spacing Criteria (0-180): 0.97

Spacing Criteria (90-270): 0.95

Spacing Criteria (Diagonal): 1.00

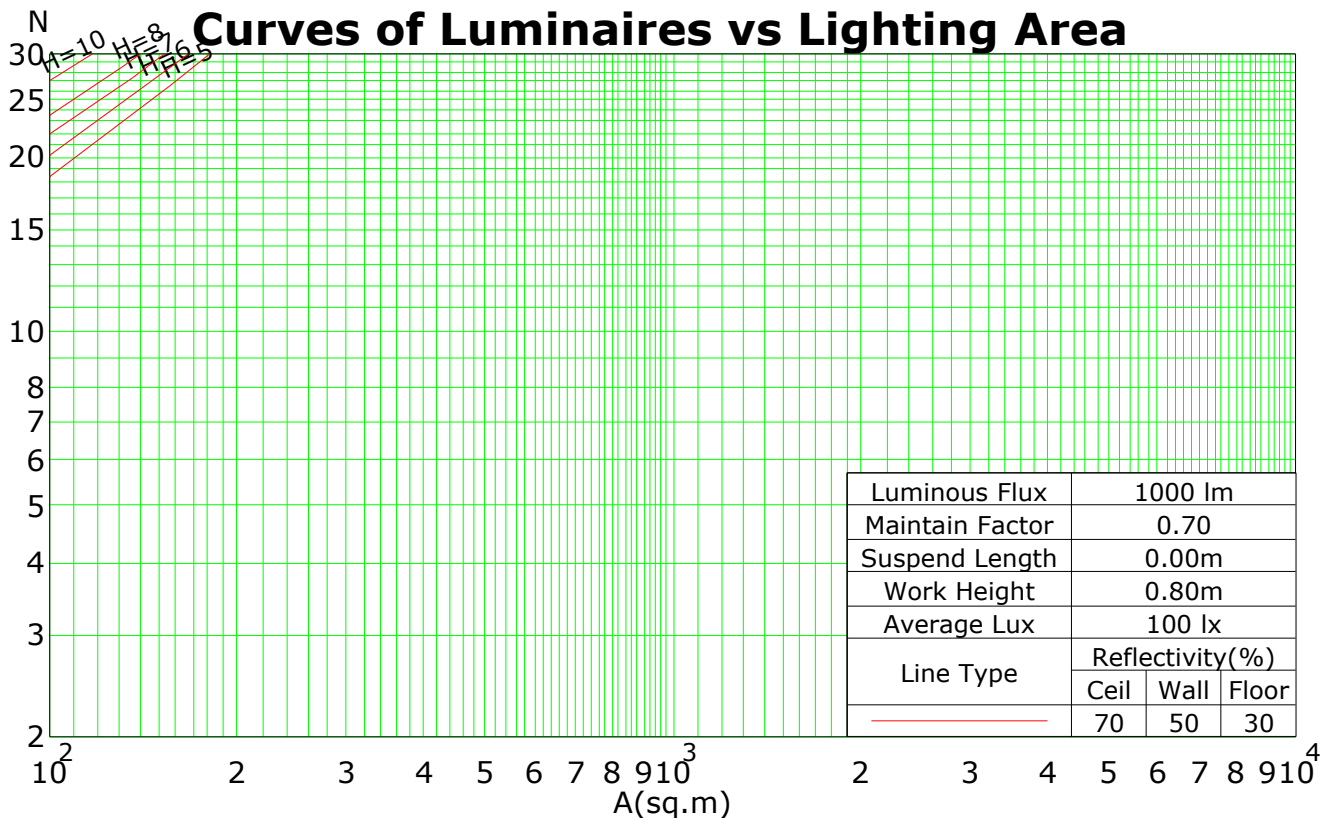

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature: 25.0 'C

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-3000

Distance: 14.631 m [K=1.0000]

Humidity:

Inspector:


Isocandela (rectangle)

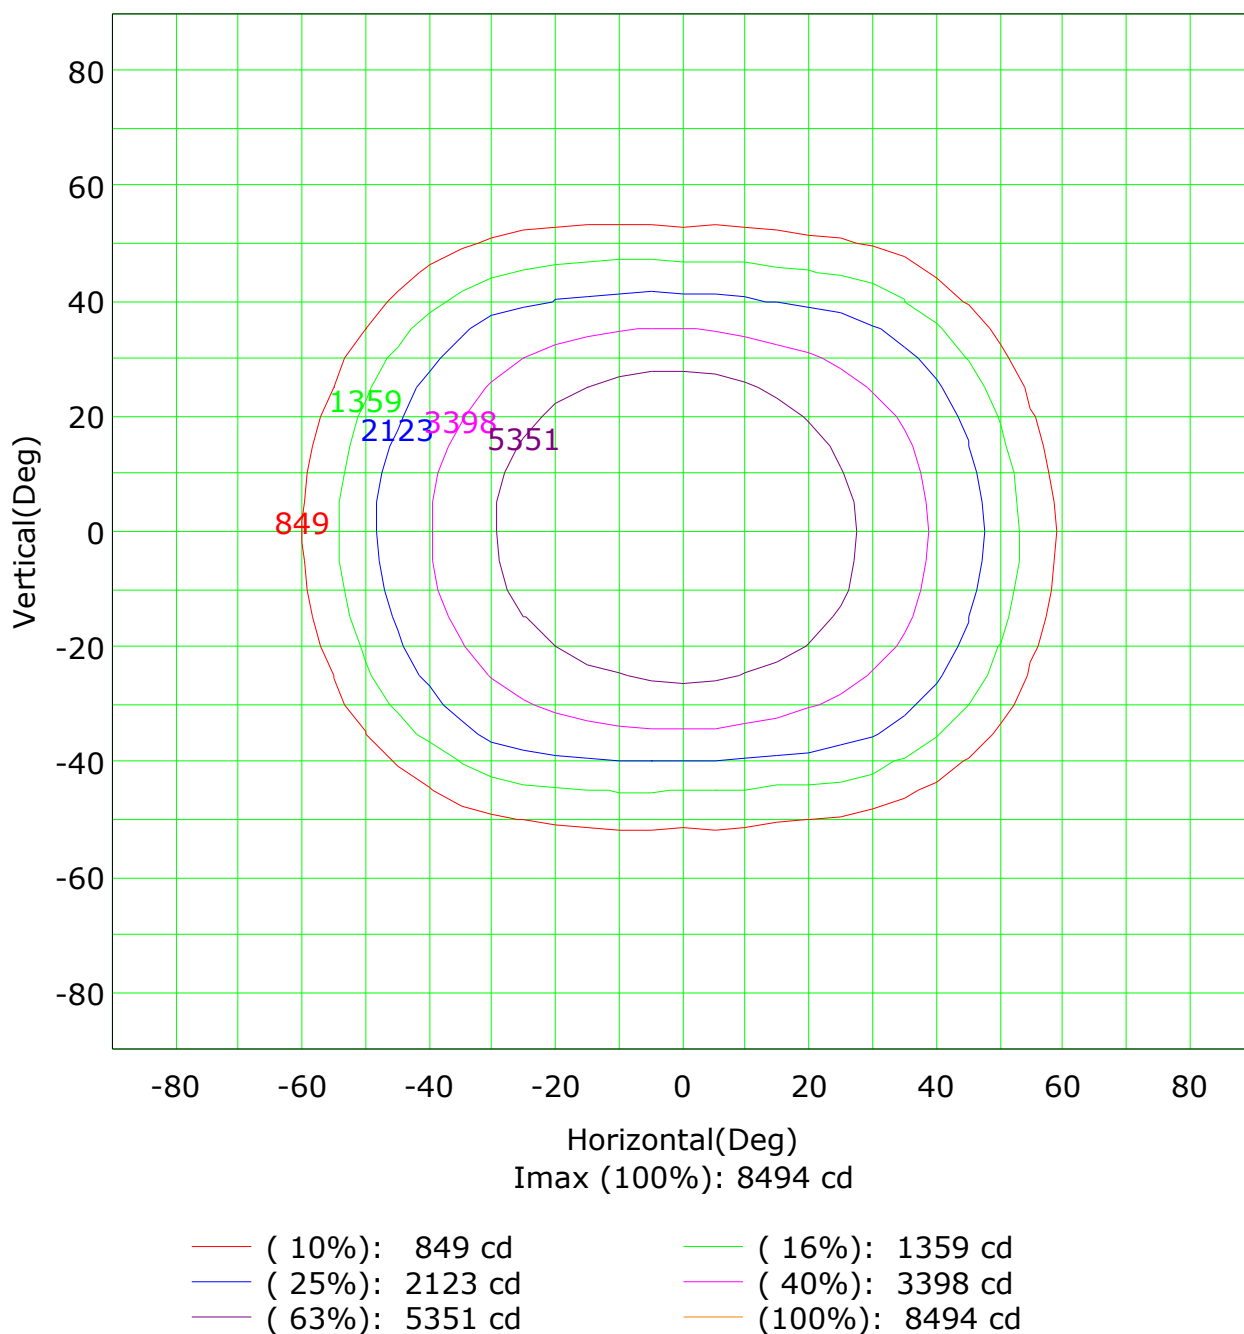

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature: 25.0 'C
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-3000
Distance: 14.631 m [K=1.0000]
Humidity:
Inspector:

Isocandela (sphere)

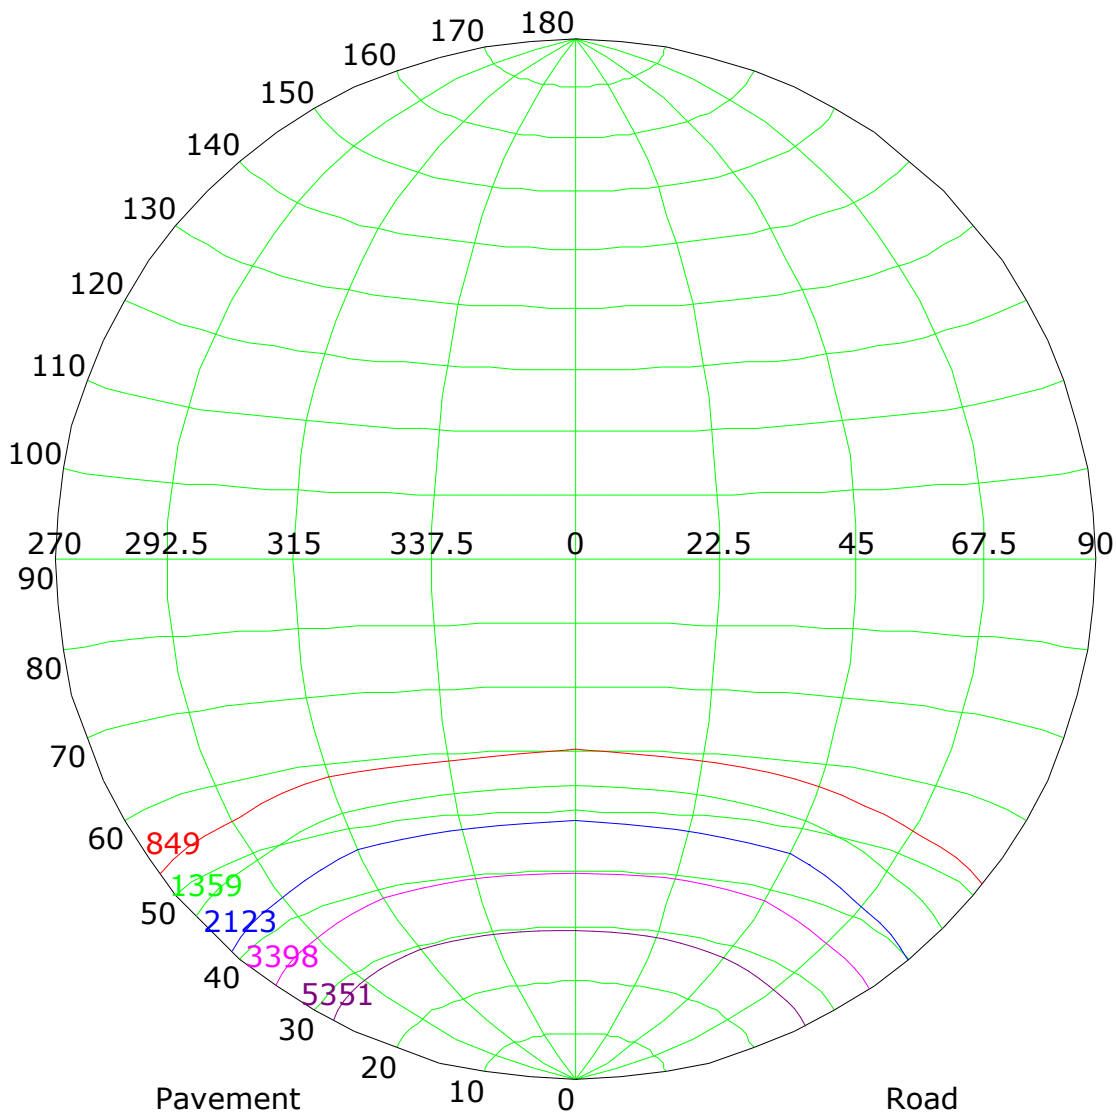

Imax (100%): 8494 cd


(10%): 849 cd
(25%): 2123 cd
(63%): 5351 cd

(16%): 1359 cd
(40%): 3398 cd
(100%): 8494 cd

CIE: narrow - short
CIE: Full-cut-off luminaire
Max.At90: 0.000 cd/klm

IES: Cut-off
Max.At80: 0.000 cd/klm
Max.80-90: 0.000 cd/klm

IsoLux Plot

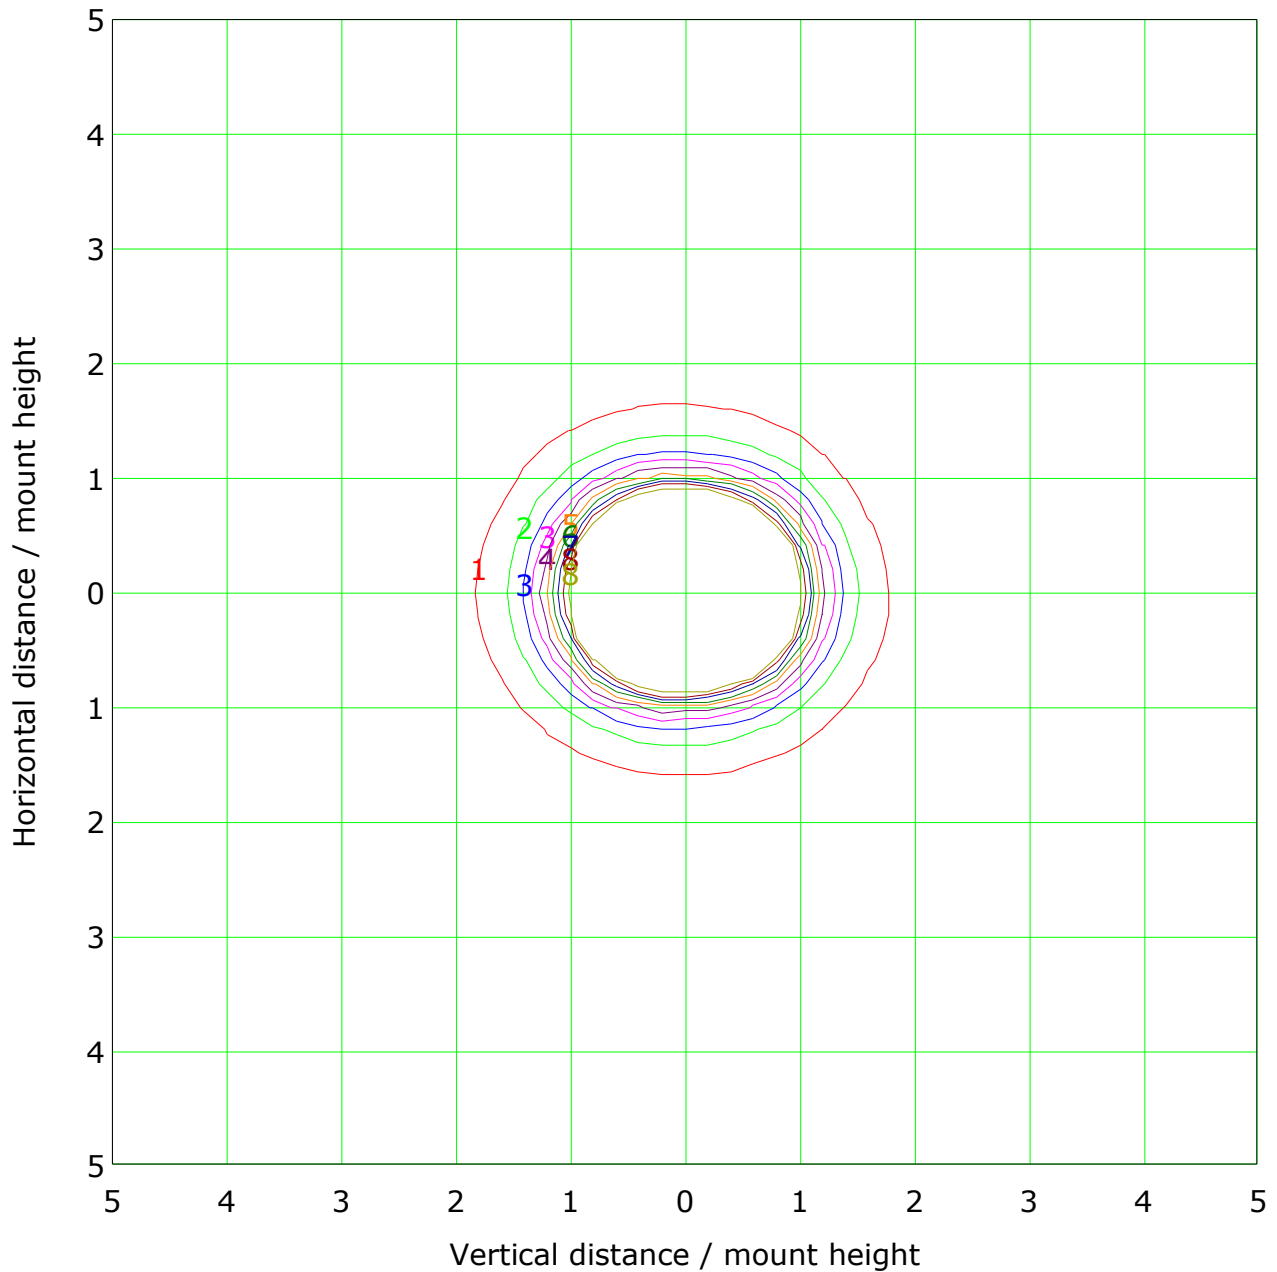


Mounting Height: 10.0m Max Lux(100%): 84.8 lx	
(1%): 0.8 lx	(2%): 1.7 lx
(3%): 2.5 lx	(4%): 3.4 lx
(5%): 4.2 lx	(6%): 5.1 lx
(7%): 5.9 lx	(8%): 6.8 lx
(9%): 7.6 lx	(10%): 8.5 lx

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature: 25.0 'C
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-3000
Distance: 14.631 m [K=1.0000]
Humidity:
Inspector:

Roadway CU Curve

Efficiency(%)

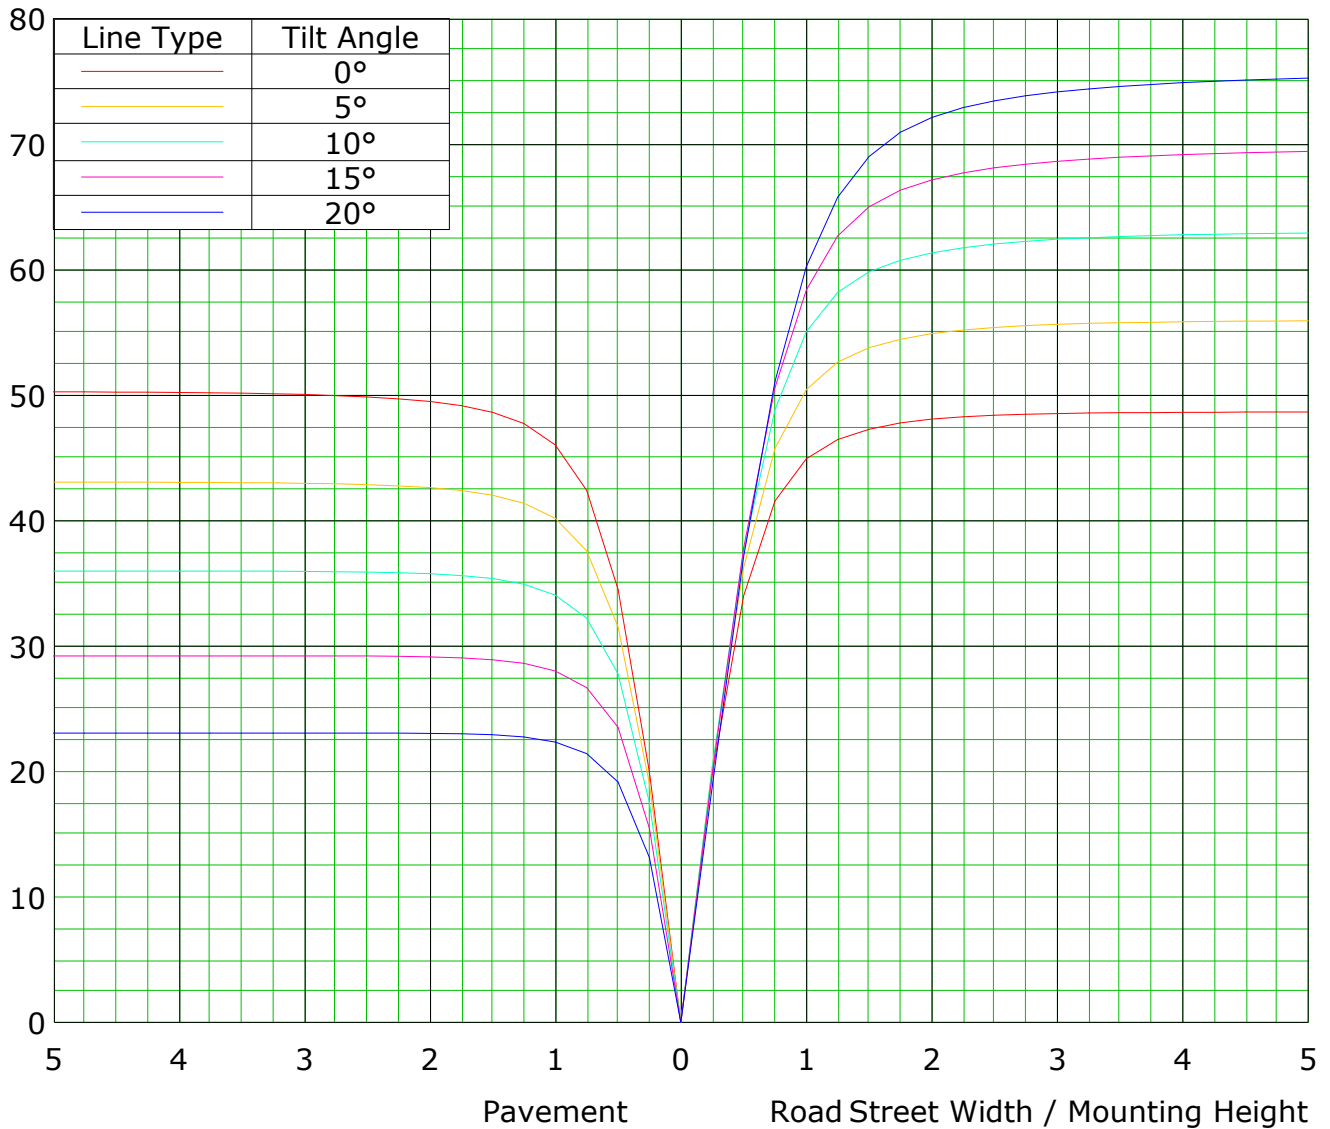



C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature: 25.0 'C
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-3000
Distance: 14.631 m [K=1.0000]
Humidity:
Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

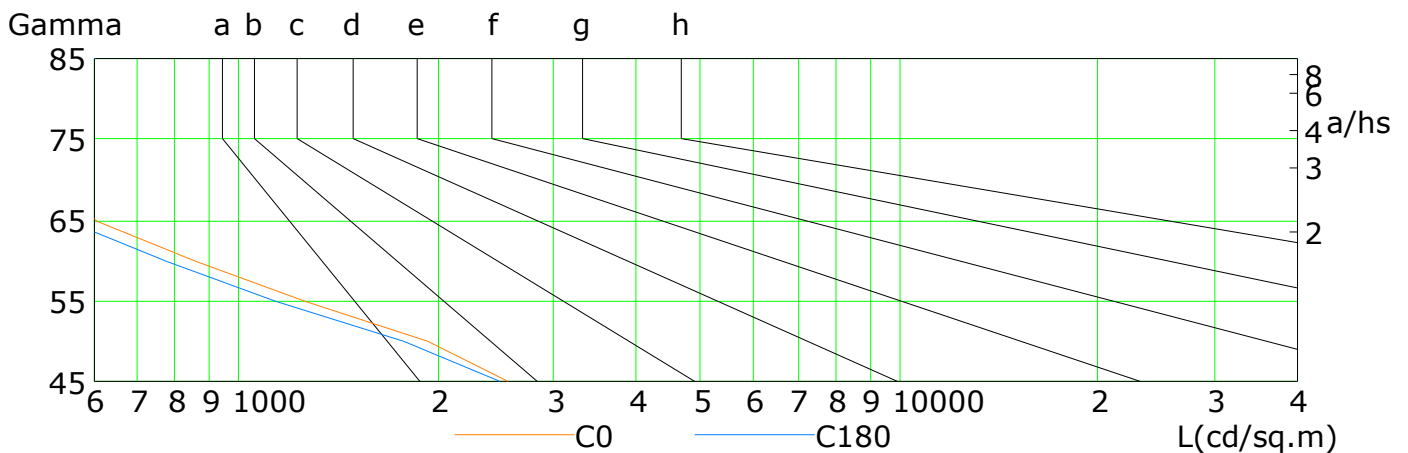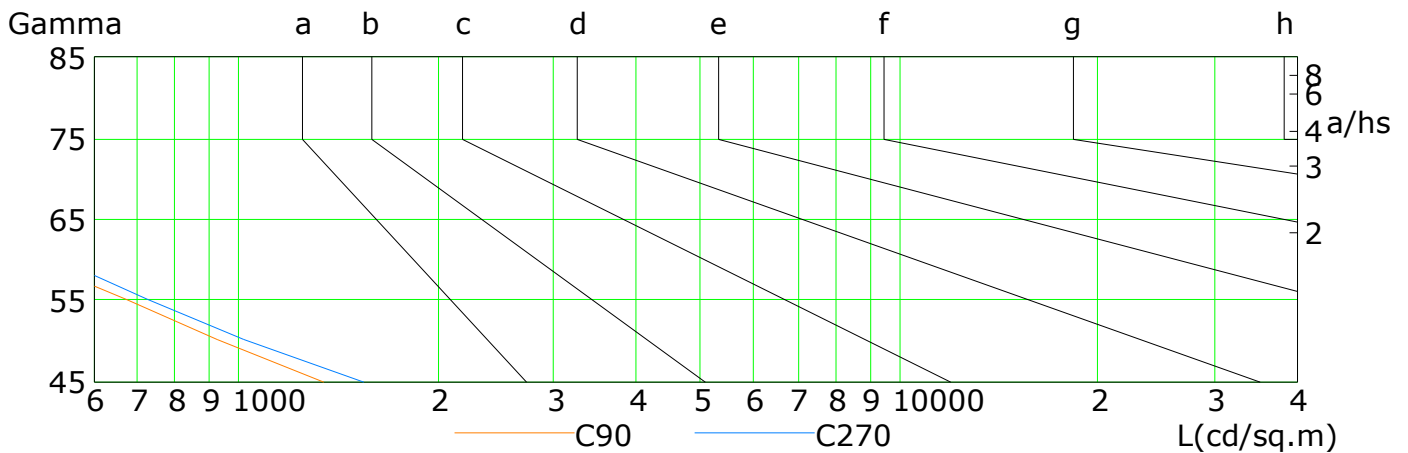


L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	2542	1932	1253	857	609	450	269	126	24
C90	1338	921	674	492	333	207	91	13	11
C180	2475	1767	1135	773	533	351	185	43	0
C270	1542	1015	726	534	366	276	205	79	15

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature: 25.0 'C
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-3000
Distance: 14.631 m [K=1.0000]
Humidity:
Inspector:


Illuminance at a Distance

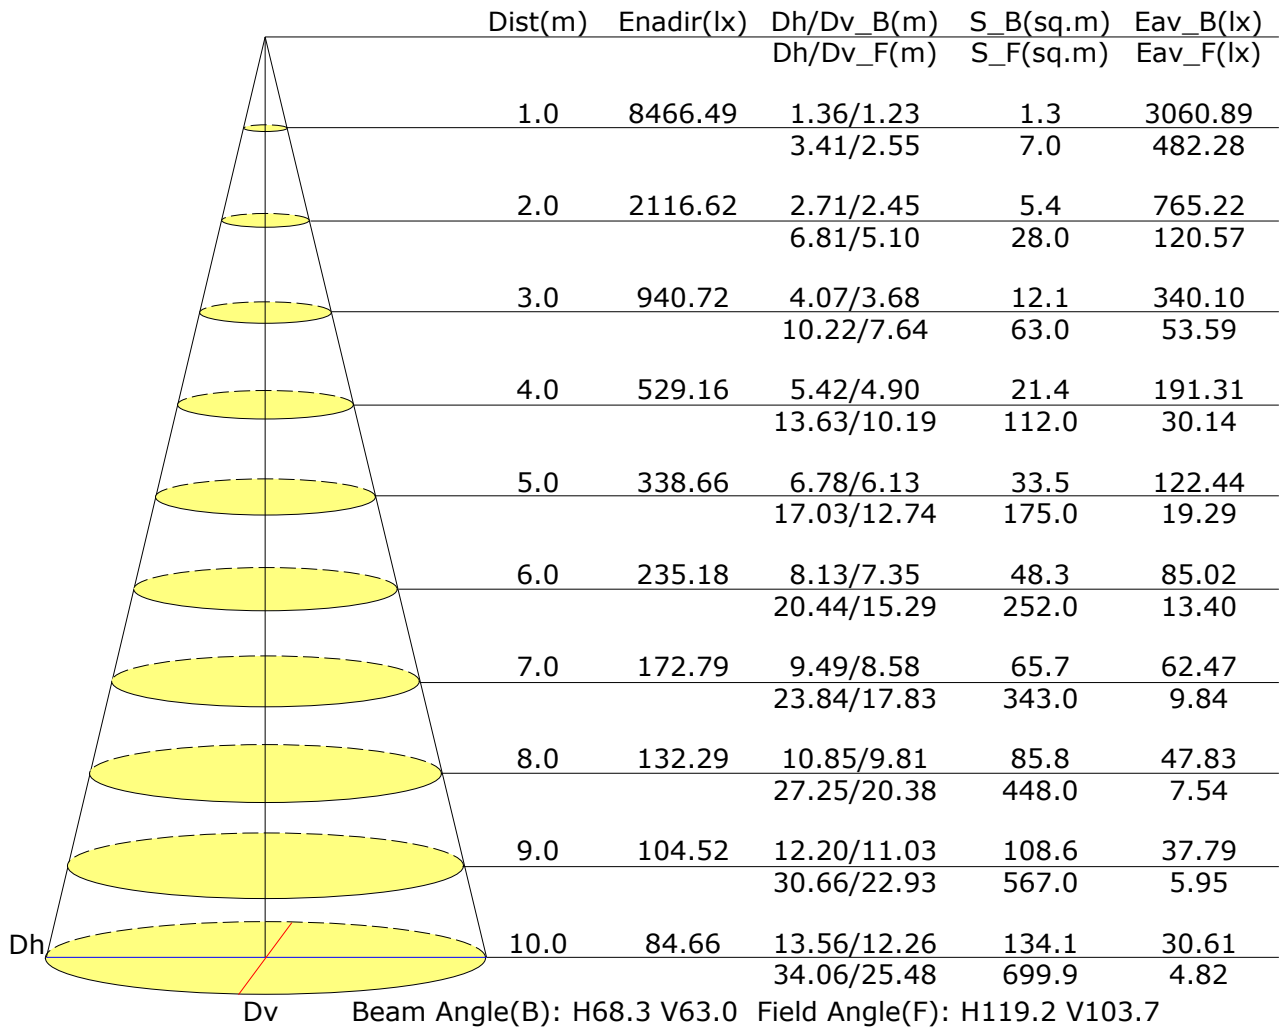

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature: 25.0 'C
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-3000
Distance: 14.631 m [K=1.0000]
Humidity:
Inspector:

Vertical IsoLux Plot

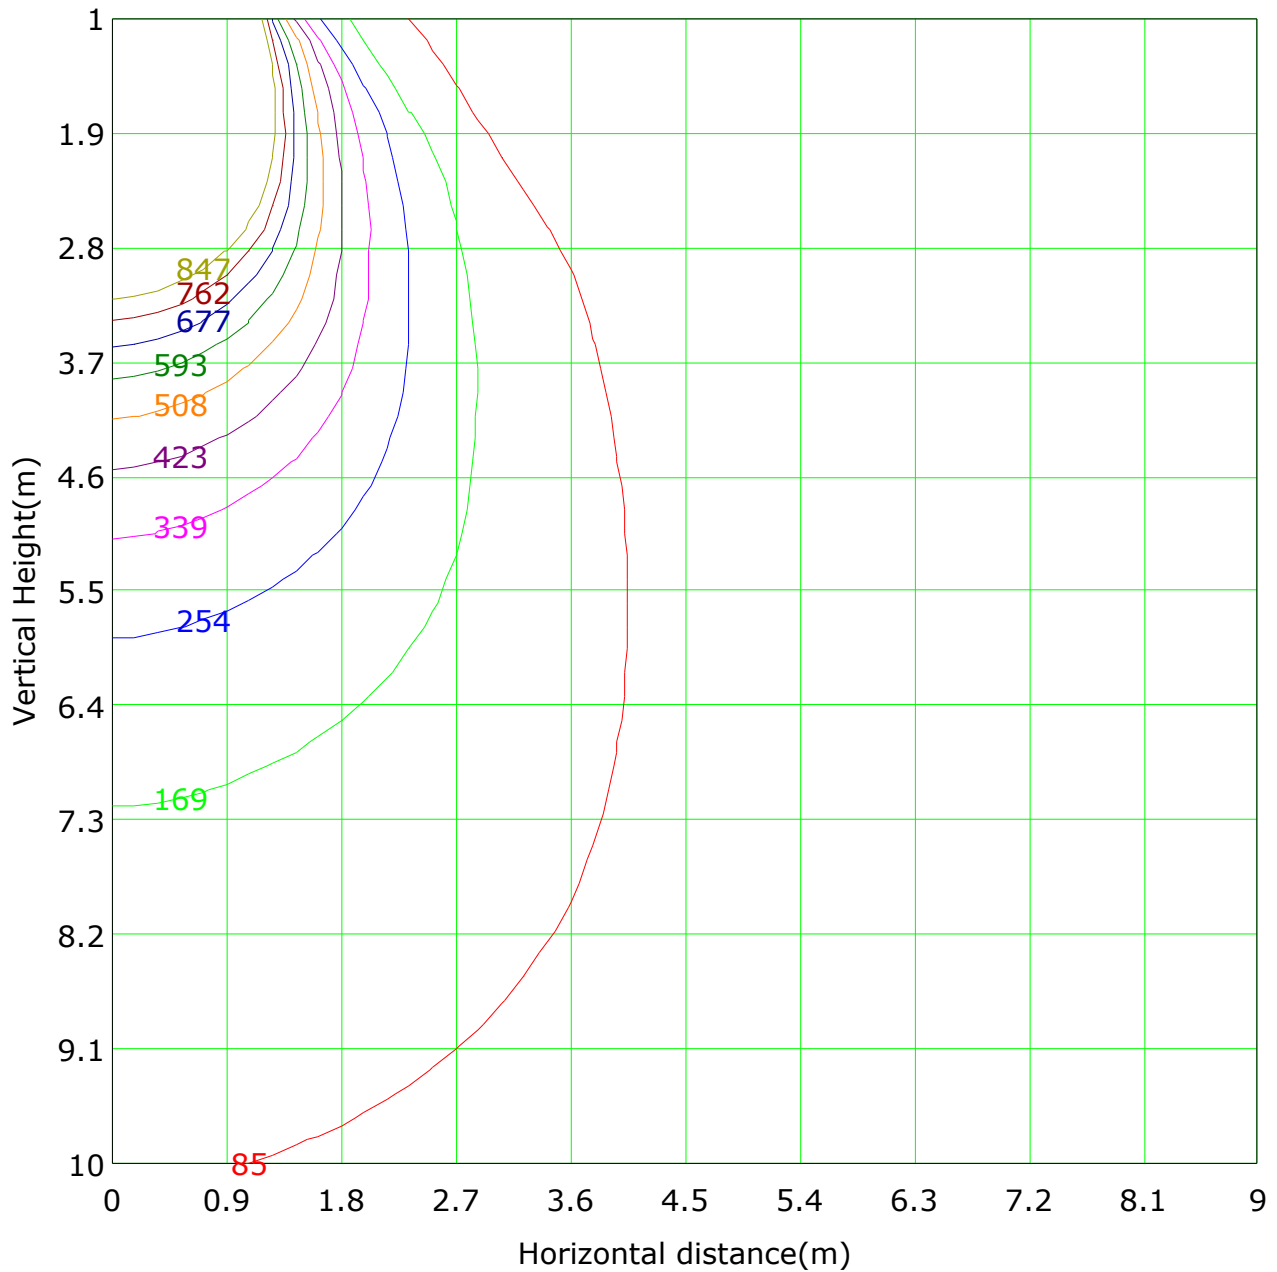

Lowest(m): 1.0m Highest(m): 10.0m Max Lux: 8466.5 lx

(1%): 84.7 lx	(2%): 169.3 lx
(3%): 254.0 lx	(4%): 338.7 lx
(5%): 423.3 lx	(6%): 508.0 lx
(7%): 592.7 lx	(8%): 677.3 lx
(9%): 762.0 lx	(10%): 846.6 lx

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature: 25.0 'C
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-3000
Distance: 14.631 m [K=1.0000]
Humidity:
Inspector:

Area Flux Table


Unit: 1m

	Orbit: 1111																				
	-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90	Flux(T)	Flux(E)
Vertical plane	0.0	0.0	0.0	0.1	0.2	0.3	0.5	0.6	0.7	0.7	0.7	0.6	0.5	0.4	0.3	0.2	0.1	0.0	0.0	5.9	0.0
-90	0.0	0.0	0.0	0.1	0.2	0.3	0.5	0.6	0.7	0.7	0.7	0.6	0.5	0.4	0.3	0.2	0.1	0.0	0.0	35.5	0.0
-80	0.0	0.0	0.2	0.6	1.2	2.0	2.9	4.1	5.3	5.5	4.5	3.4	2.6	1.7	1.0	0.4	0.1	0.0	0.0	92.8	0.0
-70	0.0	0.1	0.7	2.0	4.0	6.4	8.7	10.5	11.4	11.7	11.2	9.7	7.4	4.9	2.8	1.2	0.3	0.0	0.0	187.4	36.2
-60	0.0	0.3	1.6	4.3	8.3	13.4	17.8	20.9	22.6	23.2	22.3	19.5	15.1	9.8	5.3	2.3	0.6	0.0	0.0	369.3	314.8
-50	0.0	0.6	2.8	7.0	14.2	25.1	36.1	43.4	48.2	49.4	46.5	39.4	27.8	16.0	8.1	3.6	1.0	0.1	0.1	707.3	671.5
-40	0.0	0.9	4.0	10.2	23.3	46.0	68.7	86.9	102.3	104.9	92.8	73.7	49.6	26.0	11.5	5.0	1.4	0.1	0.1	1474.0	1450.6
-30	0.0	1.2	5.2	14.0	36.1	69.8	106.3	146.4	176.2	179.7	156.1	115.2	72.6	38.6	15.7	6.2	1.8	0.1	0.1	1634.8	1613.6
-20	0.0	1.4	6.2	17.8	47.0	89.0	139.2	193.7	227.0	229.2	202.0	150.7	92.7	48.8	19.9	7.2	2.1	0.1	0.1	1474.0	1450.6
-10	0.0	1.6	6.9	20.4	52.8	98.4	157.0	216.3	250.3	250.0	221.0	168.4	104.0	54.6	22.6	8.0	2.3	0.1	0.1	1634.8	1613.6
0	0.0	1.6	7.0	20.5	52.8	98.8	158.6	215.7	247.5	245.3	215.9	166.1	103.9	54.5	22.6	8.0	2.3	0.1	0.1	1621.2	1600.1
10	0.0	1.4	6.3	18.2	47.0	89.5	141.9	192.6	221.3	219.6	191.8	146.0	92.3	48.4	19.8	7.2	2.1	0.1	0.1	1445.5	1422.4
20	0.0	1.2	5.3	14.5	36.3	69.5	106.9	144.0	167.4	167.1	145.2	110.8	71.6	37.9	15.7	6.2	1.7	0.1	0.1	1101.4	1074.1
30	0.0	0.9	4.1	10.6	23.4	44.7	67.1	83.9	97.2	98.0	86.5	70.4	47.2	25.1	11.5	4.9	1.4	0.1	0.1	677.0	641.2
40	0.0	0.6	2.9	7.2	14.2	23.4	33.0	38.4	42.4	43.2	40.6	35.3	25.1	15.2	8.0	3.5	1.0	0.1	0.1	334.0	271.3
50	0.0	0.3	1.7	4.2	8.1	12.7	16.5	19.2	20.8	21.1	19.9	17.5	13.8	9.2	5.0	2.2	0.6	0.0	0.0	172.8	11.9
60	0.0	0.1	0.7	1.8	3.4	5.5	7.5	9.1	10.1	10.3	9.6	8.3	6.5	4.3	2.4	1.0	0.3	0.0	0.0	80.9	0.0
70	0.0	0.1	0.2	0.4	0.7	1.1	1.5	2.2	2.8	2.9	2.4	1.9	1.6	1.1	0.7	0.3	0.1	0.0	0.0	19.9	0.0
80	0.0	0.1	0.2	0.2	0.2	0.3	0.3	0.4	0.4	0.4	0.4	0.4	0.3	0.3	0.2	0.1	0.0	0.0	0.0	4.2	0.0
90	0.3	12.1	56.0	154.0	373.2	696.0	1070.1	1428.2	1653.9	1662.2	1469.3	1137.3	734.5	396.6	173.0	67.5	18.9	1.2	1.1	105	
Flux(T)	0.0	0.0	0.0	80.8	316.7	641.5	1014.8	1367.4	1590.8	1599.4	1409.5	1080.6	679.1	338.3	101.6	0.0	0.0	0.0	0.0		10221
Flux(E)	0.0	0.0	0.0	80.8	316.7	641.5	1014.8	1367.4	1590.8	1599.4	1409.5	1080.6	679.1	338.3	101.6	0.0	0.0	0.0	0.0		10221

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature: 25.0 'C
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-3000
Distance: 14.631 m [K=1.0000]
Humidity:
Inspector:


The Average Illuminance Effective Figure

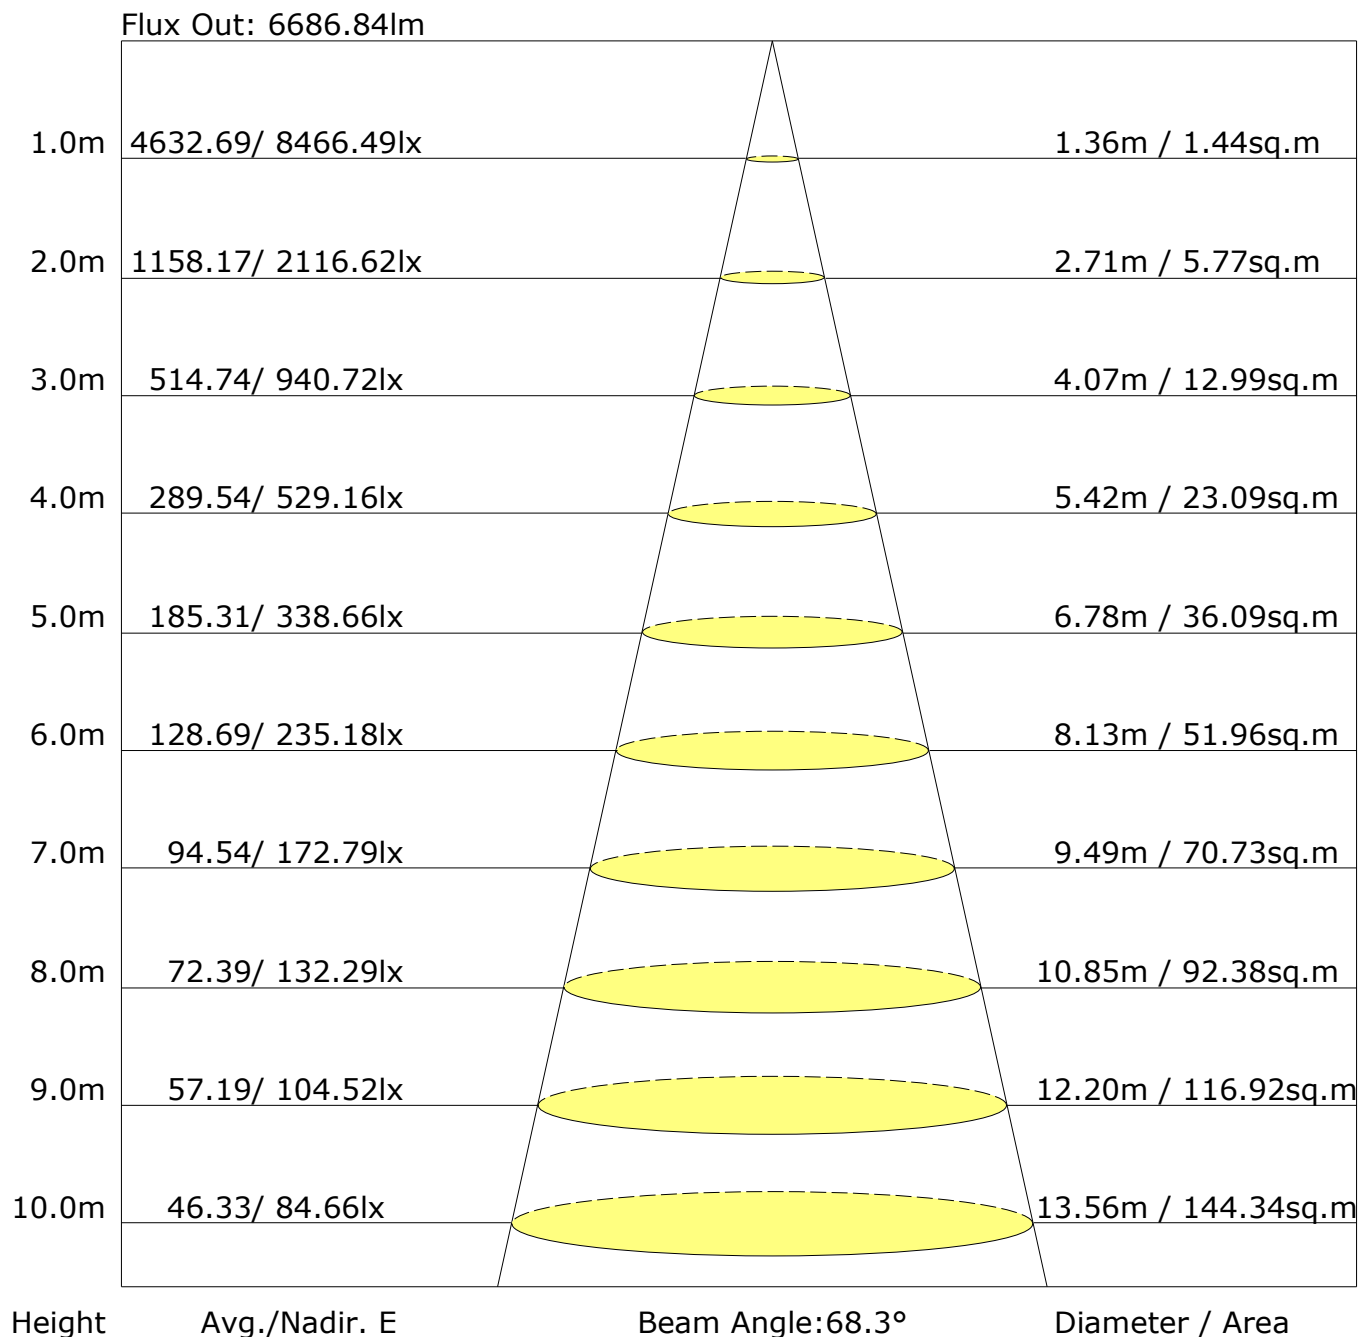

C Plane (°): 0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature: 25.0 °C
 Operator:

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: GPM-3000
 Distance: 14.631 m [K=1.0000]
 Humidity:
 Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

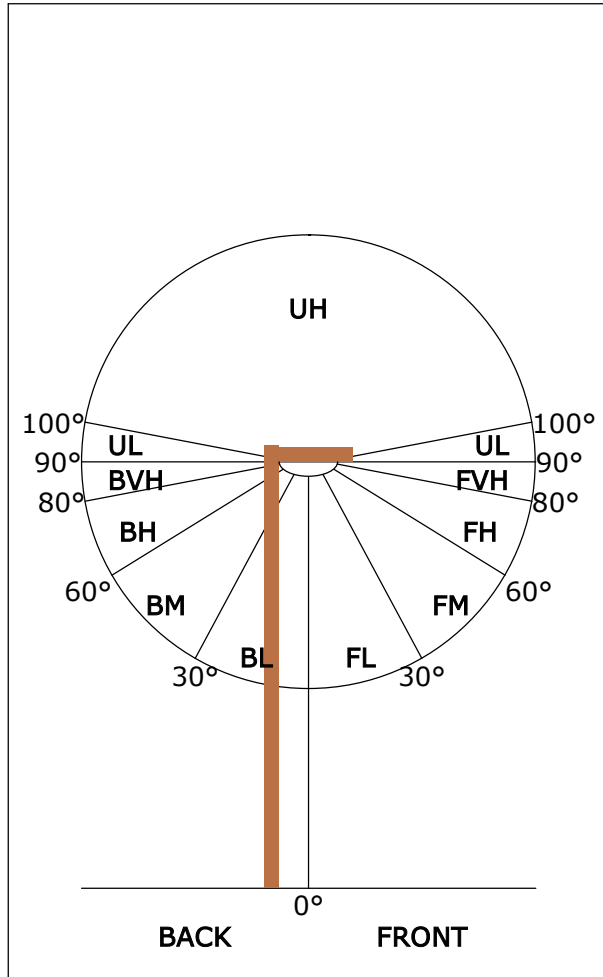


ZONE	LUMENS	% LAMP LUMENS
FORWARD LIGHT	5458	49.1
FL (0°-30°)	2774	25.0
FM (30°-60°)	2391	21.5
FH (60°-80°)	284	2.6
FVH (80°-90°)	9	0.1
BACK LIGHT	5649	50.9
BL (0°-30°)	2847	25.6
BM (30°-60°)	2477	22.3
BH (60°-80°)	314	2.8
BVH (80°-90°)	12	0.1
UP LIGHT	0	0.0
UL (90°-100°)	0	0.0
UH (100°-180°)	0	0.0
TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-11	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B4 U0 G1
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B4 U0 G1

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature: 25.0 'C
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-3000
Distance: 14.631 m [K=1.0000]
Humidity:
Inspector:

LCS Graph

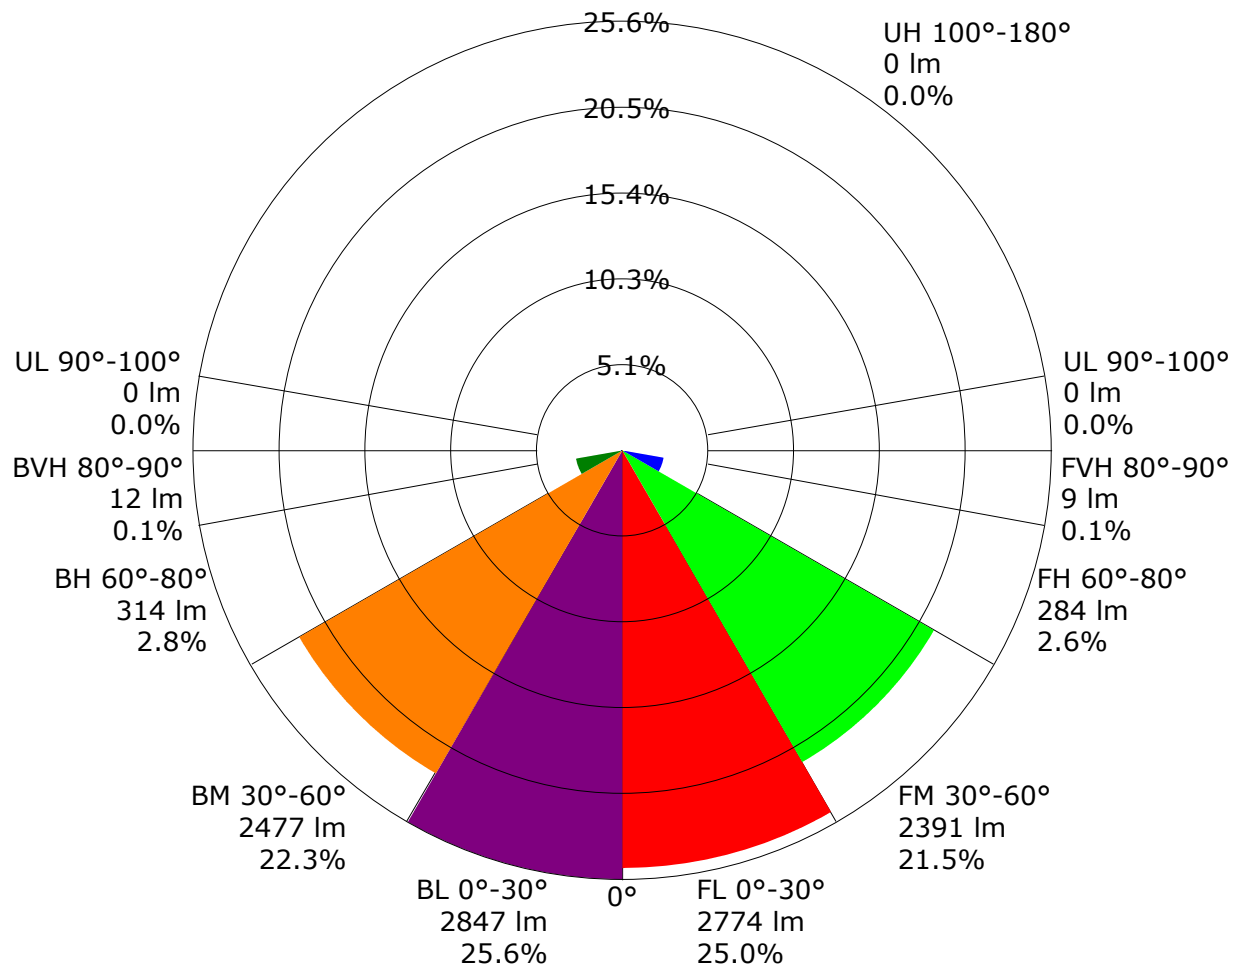

Back Light

Scale= MAX LCS%

Trapped Light:NA,NA

Forward Light

Utilisation Factor Table(Floor cavity)

Utilisation Factors UF(F)			SHR NOM = 1.00									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.73	0.82	0.88	0.92	0.97	1.01	1.03	1.06	1.08	
	0.30		0.67	0.76	0.82	0.87	0.93	0.97	1.00	1.04	1.06	
	0.20		0.63	0.72	0.78	0.83	0.89	0.94	0.97	1.01	1.04	
0.50	0.50	0.20	0.72	0.80	0.86	0.89	0.94	0.98	1.00	1.03	1.04	
	0.30		0.66	0.75	0.81	0.85	0.91	0.94	0.97	1.00	1.02	
	0.20		0.63	0.71	0.77	0.82	0.88	0.92	0.94	0.98	1.01	
0.30	0.50	0.20	0.71	0.78	0.83	0.87	0.92	0.94	0.96	0.99	1.01	
	0.30		0.66	0.74	0.80	0.83	0.89	0.92	0.94	0.97	0.99	
	0.20		0.62	0.71	0.76	0.80	0.86	0.90	0.92	0.95	0.98	
0.00	0.00	0.00	0.60	0.69	0.74	0.78	0.83	0.86	0.88	0.91	0.93	
Rating:76W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Utilisation Factor Table(Wall)

Utilisation Factors UF(W)			SHR NOM = 1.00									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.75	0.60	0.50	0.43	0.34	0.28	0.24	0.18	0.15	
	0.30		0.63	0.52	0.44	0.38	0.31	0.26	0.22	0.17	0.14	
	0.20		0.54	0.45	0.39	0.34	0.28	0.24	0.20	0.16	0.13	
0.50	0.50	0.20	0.72	0.57	0.48	0.41	0.32	0.30	0.22	0.17	0.14	
	0.30		0.61	0.50	0.42	0.37	0.29	0.24	0.21	0.16	0.13	
	0.20		0.53	0.44	0.38	0.33	0.27	0.23	0.20	0.15	0.13	
0.30	0.50	0.20	0.70	0.55	0.46	0.39	0.30	0.25	0.21	0.16	0.13	
	0.30		0.59	0.48	0.41	0.35	0.28	0.23	0.20	0.15	0.12	
	0.20		0.52	0.43	0.37	0.32	0.26	0.22	0.19	0.14	0.12	
0.00	0.00	0.00	0.40	0.32	0.26	0.23	0.18	0.14	0.12	0.09	0.07	
Rating:76W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Utilisation Factor Table(Ceiling cavity)

Utilisation Factors UF(C)			SHR NOM = 1.00									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.14	0.16	0.17	0.17	0.19	0.19	0.20	0.21	0.21	
	0.30		0.09	0.11	0.12	0.13	0.15	0.16	0.17	0.19	0.19	
	0.20		0.05	0.07	0.09	0.10	0.12	0.14	0.15	0.17	0.18	
0.50	0.50	0.20	0.14	0.15	0.16	0.17	0.18	0.19	0.19	0.20	0.20	
	0.30		0.09	0.11	0.12	0.13	0.15	0.16	0.17	0.18	0.19	
	0.20		0.05	0.07	0.09	0.10	0.12	0.14	0.15	0.16	0.17	
0.30	0.50	0.20	0.13	0.15	0.15	0.16	0.17	0.18	0.18	0.19	0.19	
	0.30		0.09	0.10	0.12	0.13	0.14	0.15	0.16	0.17	0.18	
	0.20		0.05	0.07	0.09	0.10	0.12	0.13	0.14	0.16	0.17	
0.00	0.00	0.00	NA	NA	NA	NA	NA	NA	NA	NA	NA	
Rating:76W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	8463.6	8.1	8.1	0.07	0.07
1.0-2.0	8454.4	24.3	32.4	0.22	0.29
2.0-3.0	8438.4	40.4	72.7	0.36	0.65
3.0-4.0	8415.1	56.3	129.1	0.51	1.16
4.0-5.0	8383.7	72.1	201.2	0.65	1.81
5.0-6.0	8343.0	87.7	288.9	0.79	2.60
6.0-7.0	8292.6	102.9	391.8	0.93	3.53
7.0-8.0	8234.3	117.9	509.7	1.06	4.59
8.0-9.0	8167.8	132.4	642.1	1.19	5.78
9.0-10.0	8093.2	146.5	788.6	1.32	7.10
10.0-11.0	8010.8	160.1	948.7	1.44	8.54
11.0-12.0	7922.0	173.2	1121.9	1.56	10.10
12.0-13.0	7826.7	185.8	1307.6	1.67	11.77
13.0-14.0	7723.2	197.7	1505.3	1.78	13.55
14.0-15.0	7613.1	209.0	1714.4	1.88	15.44
15.0-16.0	7495.5	219.7	1934.0	1.98	17.41
16.0-17.0	7370.4	229.6	2163.6	2.07	19.48
17.0-18.0	7237.5	238.7	2402.2	2.15	21.63
18.0-19.0	7096.3	246.9	2649.2	2.22	23.85
19.0-20.0	6945.2	254.2	2903.4	2.29	26.14
20.0-21.0	6785.0	260.6	3164.0	2.35	28.49
21.0-22.0	6616.8	265.9	3429.9	2.39	30.88
22.0-23.0	6438.2	270.2	3700.1	2.43	33.31
23.0-24.0	6250.0	273.3	3973.4	2.46	35.78
24.0-25.0	6055.3	275.4	4248.7	2.48	38.25
25.0-26.0	5853.8	276.4	4525.1	2.49	40.74
26.0-27.0	5647.0	276.3	4801.4	2.49	43.23
27.0-28.0	5437.3	275.3	5076.7	2.48	45.71
28.0-29.0	5223.2	273.3	5350.0	2.46	48.17
29.0-30.0	5007.3	270.4	5620.4	2.43	50.60
30.0-31.0	4789.7	266.6	5887.0	2.40	53.01
31.0-32.0	4567.7	261.7	6148.7	2.36	55.36
32.0-33.0	4345.0	256.0	6404.7	2.31	57.67
33.0-34.0	4128.3	249.9	6654.6	2.25	59.92
34.0-35.0	3916.4	243.3	6897.9	2.19	62.11
35.0-36.0	3705.3	236.0	7133.8	2.12	64.23

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature: 25.0 'C
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-3000
 Distance: 14.631 m [K=1.0000]
 Humidity:
 Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	3502.0	228.4	7362.3	2.06	66.29
37.0-38.0	3307.9	220.8	7583.1	1.99	68.28
38.0-39.0	3120.2	213.0	7796.1	1.92	70.19
39.0-40.0	2942.5	205.2	8001.3	1.85	72.04
40.0-41.0	2774.2	197.6	8198.9	1.78	73.82
41.0-42.0	2610.1	189.7	8388.6	1.71	75.53
42.0-43.0	2451.1	181.6	8570.2	1.63	77.16
43.0-44.0	2301.4	173.7	8743.9	1.56	78.73
44.0-45.0	2156.0	165.7	8909.6	1.49	80.22
45.0-46.0	2013.2	157.5	9067.1	1.42	81.64
46.0-47.0	1876.3	149.3	9216.3	1.34	82.98
47.0-48.0	1745.1	141.1	9357.4	1.27	84.25
48.0-49.0	1619.0	133.0	9490.4	1.20	85.45
49.0-50.0	1497.9	124.9	9615.3	1.12	86.57
50.0-51.0	1381.9	116.9	9732.2	1.05	87.63
51.0-52.0	1271.6	109.1	9841.4	0.98	88.61
52.0-53.0	1168.5	101.7	9943.0	0.92	89.52
53.0-54.0	1074.5	94.7	10037.7	0.85	90.38
54.0-55.0	988.3	88.2	10126.0	0.79	91.17
55.0-56.0	909.8	82.2	10208.2	0.74	91.91
56.0-57.0	840.5	76.9	10285.0	0.69	92.60
57.0-58.0	778.4	72.0	10357.0	0.65	93.25
58.0-59.0	721.7	67.5	10424.5	0.61	93.86
59.0-60.0	670.1	63.3	10487.8	0.57	94.43
60.0-61.0	620.8	59.2	10547.1	0.53	94.96
61.0-62.0	575.0	55.4	10602.5	0.50	95.46
62.0-63.0	532.7	51.8	10654.3	0.47	95.93
63.0-64.0	492.3	48.3	10702.6	0.44	96.36
64.0-65.0	454.9	45.0	10747.6	0.41	96.77
65.0-66.0	418.8	41.8	10789.4	0.38	97.14
66.0-67.0	385.1	38.7	10828.2	0.35	97.49
67.0-68.0	352.1	35.7	10863.8	0.32	97.81
68.0-69.0	320.1	32.7	10896.5	0.29	98.11
69.0-70.0	290.9	29.9	10926.4	0.27	98.38
70.0-71.0	262.1	27.1	10953.5	0.24	98.62
71.0-72.0	234.3	24.4	10977.8	0.22	98.84

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature: 25.0 'C
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-3000
 Distance: 14.631 m [K=1.0000]
 Humidity:
 Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	208.2	21.8	10999.6	0.20	99.04
73.0-74.0	182.1	19.1	11018.8	0.17	99.21
74.0-75.0	157.1	16.6	11035.4	0.15	99.36
75.0-76.0	134.1	14.2	11049.6	0.13	99.49
76.0-77.0	112.5	12.0	11061.6	0.11	99.60
77.0-78.0	92.2	9.9	11071.5	0.09	99.68
78.0-79.0	73.8	7.9	11079.4	0.07	99.76
79.0-80.0	58.2	6.3	11085.7	0.06	99.81
80.0-81.0	45.1	4.9	11090.5	0.04	99.86
81.0-82.0	35.1	3.8	11094.4	0.03	99.89
82.0-83.0	27.2	3.0	11097.3	0.03	99.92
83.0-84.0	20.5	2.2	11099.5	0.02	99.94
84.0-85.0	15.5	1.7	11101.2	0.02	99.95
85.0-86.0	12.6	1.4	11102.6	0.01	99.96
86.0-87.0	10.7	1.2	11103.8	0.01	99.98
87.0-88.0	10.3	1.1	11104.9	0.01	99.99
88.0-89.0	10.0	1.1	11106.0	0.01	100.00
89.0-90.0	4.8	0.5	11106.5	0.00	100.00
90.0-91.0	0.0	0.0	11106.5	0.00	100.00
91.0-92.0	0.0	0.0	11106.5	0.00	100.00
92.0-93.0	0.0	0.0	11106.5	0.00	100.00
93.0-94.0	0.0	0.0	11106.5	0.00	100.00
94.0-95.0	0.0	0.0	11106.5	0.00	100.00
95.0-96.0	0.0	0.0	11106.5	0.00	100.00
96.0-97.0	0.0	0.0	11106.5	0.00	100.00
97.0-98.0	0.0	0.0	11106.5	0.00	100.00
98.0-99.0	0.0	0.0	11106.5	0.00	100.00
99.0-100.0	0.0	0.0	11106.5	0.00	100.00
100.0-101.0	0.0	0.0	11106.5	0.00	100.00
101.0-102.0	0.0	0.0	11106.5	0.00	100.00
102.0-103.0	0.0	0.0	11106.5	0.00	100.00
103.0-104.0	0.0	0.0	11106.5	0.00	100.00
104.0-105.0	0.0	0.0	11106.5	0.00	100.00
105.0-106.0	0.0	0.0	11106.5	0.00	100.00
106.0-107.0	0.0	0.0	11106.5	0.00	100.00
107.0-108.0	0.0	0.0	11106.5	0.00	100.00

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature: 25.0 'C
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-3000
 Distance: 14.631 m [K=1.0000]
 Humidity:
 Inspector:

Zonal Lumen (Continue 3)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	0.0	0.0	11106.5	0.00	100.00
109.0-110.0	0.0	0.0	11106.5	0.00	100.00
110.0-111.0	0.0	0.0	11106.5	0.00	100.00
111.0-112.0	0.0	0.0	11106.5	0.00	100.00
112.0-113.0	0.0	0.0	11106.5	0.00	100.00
113.0-114.0	0.0	0.0	11106.5	0.00	100.00
114.0-115.0	0.0	0.0	11106.5	0.00	100.00
115.0-116.0	0.0	0.0	11106.5	0.00	100.00
116.0-117.0	0.0	0.0	11106.5	0.00	100.00
117.0-118.0	0.0	0.0	11106.5	0.00	100.00
118.0-119.0	0.0	0.0	11106.5	0.00	100.00
119.0-120.0	0.0	0.0	11106.5	0.00	100.00
120.0-121.0	0.0	0.0	11106.5	0.00	100.00
121.0-122.0	0.0	0.0	11106.5	0.00	100.00
122.0-123.0	0.0	0.0	11106.5	0.00	100.00
123.0-124.0	0.0	0.0	11106.5	0.00	100.00
124.0-125.0	0.0	0.0	11106.5	0.00	100.00
125.0-126.0	0.0	0.0	11106.5	0.00	100.00
126.0-127.0	0.0	0.0	11106.5	0.00	100.00
127.0-128.0	0.0	0.0	11106.5	0.00	100.00
128.0-129.0	0.0	0.0	11106.5	0.00	100.00
129.0-130.0	0.0	0.0	11106.5	0.00	100.00
130.0-131.0	0.0	0.0	11106.5	0.00	100.00
131.0-132.0	0.0	0.0	11106.5	0.00	100.00
132.0-133.0	0.0	0.0	11106.5	0.00	100.00
133.0-134.0	0.0	0.0	11106.5	0.00	100.00
134.0-135.0	0.0	0.0	11106.5	0.00	100.00
135.0-136.0	0.0	0.0	11106.5	0.00	100.00
136.0-137.0	0.0	0.0	11106.5	0.00	100.00
137.0-138.0	0.0	0.0	11106.5	0.00	100.00
138.0-139.0	0.0	0.0	11106.5	0.00	100.00
139.0-140.0	0.0	0.0	11106.5	0.00	100.00
140.0-141.0	0.0	0.0	11106.5	0.00	100.00
141.0-142.0	0.0	0.0	11106.5	0.00	100.00
142.0-143.0	0.0	0.0	11106.5	0.00	100.00
143.0-144.0	0.0	0.0	11106.5	0.00	100.00

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature: 25.0 'C
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-3000
 Distance: 14.631 m [K=1.0000]
 Humidity:
 Inspector:

Zonal Lumen (Continue 4)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	0.0	0.0	11106.5	0.00	100.00
145.0-146.0	0.0	0.0	11106.5	0.00	100.00
146.0-147.0	0.0	0.0	11106.5	0.00	100.00
147.0-148.0	0.0	0.0	11106.5	0.00	100.00
148.0-149.0	0.0	0.0	11106.5	0.00	100.00
149.0-150.0	0.0	0.0	11106.5	0.00	100.00
150.0-151.0	0.0	0.0	11106.5	0.00	100.00
151.0-152.0	0.0	0.0	11106.5	0.00	100.00
152.0-153.0	0.0	0.0	11106.5	0.00	100.00
153.0-154.0	0.0	0.0	11106.5	0.00	100.00
154.0-155.0	0.0	0.0	11106.5	0.00	100.00
155.0-156.0	0.0	0.0	11106.5	0.00	100.00
156.0-157.0	0.0	0.0	11106.5	0.00	100.00
157.0-158.0	0.0	0.0	11106.5	0.00	100.00
158.0-159.0	0.0	0.0	11106.5	0.00	100.00
159.0-160.0	0.0	0.0	11106.5	0.00	100.00
160.0-161.0	0.0	0.0	11106.5	0.00	100.00
161.0-162.0	0.0	0.0	11106.5	0.00	100.00
162.0-163.0	0.0	0.0	11106.5	0.00	100.00
163.0-164.0	0.0	0.0	11106.5	0.00	100.00
164.0-165.0	0.0	0.0	11106.5	0.00	100.00
165.0-166.0	0.0	0.0	11106.5	0.00	100.00
166.0-167.0	0.0	0.0	11106.5	0.00	100.00
167.0-168.0	0.0	0.0	11106.5	0.00	100.00
168.0-169.0	0.0	0.0	11106.5	0.00	100.00
169.0-170.0	0.0	0.0	11106.5	0.00	100.00
170.0-171.0	0.0	0.0	11106.5	0.00	100.00
171.0-172.0	0.0	0.0	11106.5	0.00	100.00
172.0-173.0	0.0	0.0	11106.5	0.00	100.00
173.0-174.0	0.0	0.0	11106.5	0.00	100.00
174.0-175.0	0.0	0.0	11106.5	0.00	100.00
175.0-176.0	0.0	0.0	11106.5	0.00	100.00
176.0-177.0	0.0	0.0	11106.5	0.00	100.00
177.0-178.0	0.0	0.0	11106.5	0.00	100.00
178.0-179.0	0.0	0.0	11106.5	0.00	100.00
179.0-180.0	0.0	0.0	11106.5	0.00	100.00

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature: 25.0 'C
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-3000
 Distance: 14.631 m [K=1.0000]
 Humidity:
 Inspector:

Zonal Lumen (Continue 5)

cone flux(90°): 8909.61 lm

%lum = 80.2%

%lamp = 80.2%

cone flux(120°): 10487.83 lm

%lum = 94.4%

%lamp = 94.4%

PPID Data Table

Unit: cd

G\C	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G1.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G3.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G4.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G5.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G6.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G7.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G8.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G9.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G10.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G11.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G12.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G13.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G14.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G15.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G16.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G17.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G18.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G19.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G20.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G21.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G22.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G23.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G24.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G25.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G26.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G27.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G28.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G29.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G30.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G31.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G32.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G33.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G34.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G35.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G36.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature: 25.0 'C
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-3000
 Distance: 14.631 m [K=1.0000]
 Humidity:
 Inspector:

PPID Data Table (Continue 1)

Unit: cd

G\C	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G37.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G38.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G39.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G40.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G41.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G42.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G43.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G44.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G45.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G46.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G47.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G48.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G49.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G50.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G51.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G52.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G53.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G54.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G55.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G56.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G57.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G58.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G59.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G60.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G61.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G62.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G63.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G64.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G65.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G66.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G67.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G68.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G69.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G70.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G71.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G72.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G73.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature: 25.0 'C
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-3000
 Distance: 14.631 m [K=1.0000]
 Humidity:
 Inspector:

PPID Data Table (Continue 2)

Unit: cd

G\C	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G74.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G75.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G76.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G77.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G78.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G79.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G80.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G81.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G82.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G83.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G84.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G85.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G86.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G87.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G88.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G89.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G90.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G91.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G92.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G93.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G94.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G95.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G96.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G97.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G98.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G99.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G100.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G101.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G102.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G103.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G104.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G105.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G106.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G107.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G108.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G109.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G110.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature: 25.0 'C
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-3000
 Distance: 14.631 m [K=1.0000]
 Humidity:
 Inspector:

PPID Data Table (Continue 3)

Unit: cd

G\C	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G111.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G112.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G113.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G114.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G115.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G116.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G117.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G118.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G119.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G120.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G121.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G122.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G123.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G124.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G125.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G126.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G127.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G128.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G129.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G130.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G131.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G132.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G133.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G134.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G135.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G136.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G137.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G138.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G139.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G140.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G141.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G142.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G143.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G144.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G145.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G146.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G147.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature: 25.0 'C
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-3000
 Distance: 14.631 m [K=1.0000]
 Humidity:
 Inspector:

PPID Data Table (Continue 4)

Unit: cd

G\C	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G148.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G149.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G150.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G151.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G152.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G153.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G154.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G155.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G156.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G157.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G158.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G159.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G160.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G161.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G162.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G163.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G164.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G165.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G166.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G167.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G168.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G169.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G170.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G171.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G172.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G173.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G174.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G175.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G176.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G177.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G178.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G179.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G180.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature: 25.0 'C
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-3000
 Distance: 14.631 m [K=1.0000]
 Humidity:
 Inspector:

PPID Data Table (Continue 5)

Unit: cd

G\C	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G1.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G2.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G3.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G4.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G5.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G6.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G7.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G8.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G9.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G10.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G11.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G12.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G13.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G14.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G15.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G16.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G17.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G18.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G19.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G20.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G21.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G22.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G23.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G24.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G25.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G26.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G27.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G28.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G29.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G30.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G31.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G32.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G33.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G34.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G35.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G36.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature: 25.0 'C
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-3000
 Distance: 14.631 m [K=1.0000]
 Humidity:
 Inspector:

PPID Data Table (Continue 6)

Unit: cd

G\C	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G37.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G38.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G39.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G40.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G41.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G42.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G43.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G44.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G45.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G46.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G47.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G48.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G49.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G50.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G51.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G52.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G53.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G54.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G55.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G56.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G57.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G58.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G59.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G60.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G61.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G62.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G63.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G64.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G65.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G66.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G67.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G68.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G69.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G70.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G71.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G72.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G73.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature: 25.0 'C
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-3000
 Distance: 14.631 m [K=1.0000]
 Humidity:
 Inspector:

PPID Data Table (Continue 7)

Unit: cd

G\C	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G74.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G75.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G76.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G77.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G78.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G79.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G80.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G81.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G82.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G83.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G84.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G85.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G86.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G87.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G88.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G89.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G90.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G91.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G92.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G93.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G94.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G95.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G96.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G97.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G98.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G99.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G100.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G101.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G102.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G103.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G104.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G105.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G106.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G107.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G108.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G109.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G110.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature: 25.0 'C
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-3000
 Distance: 14.631 m [K=1.0000]
 Humidity:
 Inspector:

PPID Data Table (Continue 8)

Unit: cd

G\C	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G111.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G112.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G113.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G114.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G115.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G116.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G117.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G118.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G119.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G120.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G121.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G122.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G123.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G124.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G125.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G126.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G127.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G128.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G129.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G130.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G131.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G132.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G133.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G134.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G135.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G136.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G137.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G138.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G139.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G140.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G141.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G142.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G143.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G144.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G145.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G146.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G147.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature: 25.0 'C
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-3000
 Distance: 14.631 m [K=1.0000]
 Humidity:
 Inspector:

PPID Data Table (Continue 9)

Unit: cd

G\C	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G148.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G149.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G150.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G151.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G152.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G153.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G154.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G155.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G156.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G157.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G158.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G159.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G160.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G161.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G162.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G163.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G164.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G165.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G166.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G167.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G168.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G169.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G170.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G171.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G172.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G173.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G174.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G175.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G176.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G177.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G178.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G179.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G180.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature: 25.0 'C
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-3000
 Distance: 14.631 m [K=1.0000]
 Humidity:
 Inspector:

LED Average Luminance Report

Avg.L	cd/m ²
L 0-180(65) av	1.#J
L 0-180(75) av	1.#J
L 0-180(85) av	1.#J
L 90-270(65) av	1.#J
L 90-270(75) av	1.#J
L 90-270(85) av	1.#J
L 45(65) av	1.#J
L 45(75) av	1.#J
L 45(85) av	1.#J

Standard: GB/T 29293-2012