Rev: 10-2026

Date:	Project:	Type:	Notes:	Catalog #:

WFC-AOKO SERIES
Adjustable LED Full Cut-Off Wall Pack

The WFC-AOKO Series is great for commercial and industrial applications. Field adjustable output, color and distribution options make the WFC-AOKO the ideal choice for illuminating building perimeters where control of light spill is important. Adjustability includes three lumen outputs, three color temperatures and three distribution patterns in each of the two fixtures offered.

Features & Specifications

Applications
Ideal for use in exterior commercial and industrial building perimeters.

Construction
Housing made from die-cast aluminum with durable powder coat finish. UV stabilized Polycarbonate lens. Stainless steel hardware.

Mounting
Wall Mount.

Electrical
Utilizes high-efficiency LED power supply and circuit boards. 120-277V standard. Multi-color switch (30K, 40K, 50K). Three lumen outputs selectable per fixture (40W - 5240lm - 120W - 19200lm). 50/60Hz, 0-10V dimming. <20% THD. 10Kv Surge Protection.

Beam Angle
Field adjustable Type II, III and IV distribution patterns.

Operating Temperature
Without Motion Sensor: -30C to +50C.
With Motion Sensor: -25C to +50C.

CRI
80+

Lumen Maintenance
TM-21 rating of 102,000 hours

Finish
Dark Bronze, Black or White with 100 piece MOQ - delivery 90 days.

Warranty
Five-year warranty. Terms and Conditions Apply. See warranty documentation for more information.

Certification
UL Wet Listed. IP65 Rated.

Performance Data

FSC Part #	Form Factor	Rated Wattage	Distribution	Kelvin Temp	Delivered Lumens	Efficacy
WFC-M-12L-AOKO	Medium	40	II	3000	5360	134
		40	II	4000	6240	156
		40	II	5000	5760	144
		40	III	3000	5920	148
		40	III	4000	6240	156
		40	III	5000	6440	161
		40	IV	3000	5240	131
		40	IV	4000	6160	154
		40	IV	5000	5680	142
		60	II	3000	7860	131
		60	II	4000	9180	153
		60	II	5000	8460	141
		60	III	3000	8700	145
		60	III	4000	9660	161
		60	III	5000	9480	158
		60	IV	3000	7680	128
		60	IV	4000	9060	151
		60	IV	5000	8340	139
		80	II	3000	10240	128
		80	II	4000	12000	150
		80	II	5000	11040	138
		80	III	3000	11360	142
		80	III	4000	12640	158
		80	III	5000	12400	155
		80	IV	3000	10000	125
		80	IV	4000	12640	158
		80	IV	5000	10880	136
WFC-L-19L-AOKO	Large	80	II	3000	11360	142
		80	II	4000	12880	161
		80	II	5000	11840	148
		80	III	3000	12320	154
		80	III	4000	13280	166
		80	III	5000	12960	162
		80	IV	3000	11040	138
		80	IV	4000	12560	157
		80	IV	5000	11520	144
		100	II	3000	13900	139
		100	II	4000	15800	158
		100	II	5000	14500	145
		100	III	3000	15100	151
		100	III	4000	16300	163
		100	III	5000	15900	159
		100	IV	3000	13500	135
		100	IV	4000	15400	154
		100	IV	5000	14100	141
		120	II	3000	16320	136
		120	II	4000	18600	155
		120	II	5000	17040	142
		120	III	3000	17760	148
		120	III	4000	19200	160
		120	III	5000	18720	156
		120	IV	3000	15840	132
		120	IV	4000	18120	151
		120	IV	5000	16560	138

© 2022 FSC Lighting 9120 Center Avenue, Rancho Cucamonga, CA 91730 P: 800-255-8990 www.fsclighting.com

Catalog Ordering

Sample Part # WFC-M-12L-AOKO

WFC-AOKO					
1	2	3	4	5	6

1 - Series	2 - Module (Size & Lumens)	3 - Type	4 - Finish
WFC	**M-12L** (Medium / 40W-60W-80W) **L-19L** (Large / 80W-100W-120W)	**AOKO** (Ajustable Output, Kelvin Temp 30K, 40K, 50K and Optics Type II, III, IV)	**Blank** (Standard - Dark Bronze) **B** (Black)[1] **W** (White)[1]

5 - Options (Controls)	6 - Accessories
Blank (Integrated DC Photocell) **OS-PW-WP** (Wet Location PIR Programmable Occupancy Sensor)	**EM8W** (Emergency Battery Back-Up 8W)

Dimensions

Version	Depth(A)	Width (B)	Height (C)	Weight
Medium	9.4"	10.7"	6.9"	9.9 lbs
Large	9.4"	13.3"	8.1"	12.2 lbs

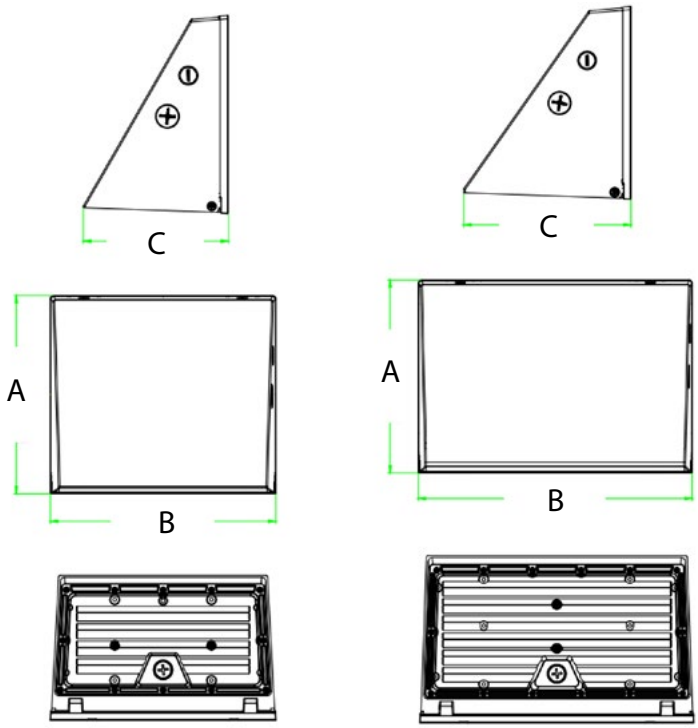

Notes

1 - 100 piece MOQ and 90 Days Delivery

Specifications subject to change without notice. Contact factory for updates.
© 2022 FSC Lighting 9120 Center Avenue, Rancho Cucamonga, CA 91730 P: 800-255-8990 www.fsclighting.com