

| | | | | |
|-------|----------|-------|--------|------------|
| Date: | Project: | Type: | Notes: | Catalog #: |
|-------|----------|-------|--------|------------|

WFC-AOKO SERIES Adjustable LED Full Cut-Off Wall Pack

The WFC-AOKO Series is great for commercial and industrial applications. Field adjustable output, color and distribution options make the WFC-AOKO the ideal choice for illuminating building perimeters where control of light spill is important. Adjustability includes three lumen outputs, three color temperatures and three distribution patterns in each of the two fixtures offered.



Features & Specifications

Applications

Ideal for use in exterior commercial and industrial building perimeters.

Construction

Housing made from die-cast aluminum with durable powder coat finish. UV stabilized Polycarbonate lens. Stainless steel hardware.

Mounting

Wall Mount.

Electrical

Utilizes high-efficiency LED power supply and circuit boards. 120-277V standard. Multi-color switch (30K, 40K, 50K). Three lumen outputs selectable per fixture (40W - 5240lm - 120W - 19200lm). 50/60Hz, 0-10V dimming. <20% THD. 10Kv Surge Protection.

Beam Angle

Field adjustable Type II, III and IV distribution patterns.

Operating Temperature

Without Motion Sensor: -30C to +50C.

With Motion Sensor: -25C to +50C.

CRI

80+

Finish

Dark Bronze, Black or White with 100 piece MOQ - delivery 90 days.

Warranty

Five-year warranty. Terms and Conditions Apply. See warranty documentation for more information.

Certification

UL Wet Listed. IP65 Rated.



Performance Data

| FSC Part # | Form Factor | Rated Wattage | Distribution | Kelvin Temp | Delivered Lumens | Efficacy |
|----------------|-------------|---------------|--------------|-------------|------------------|----------|
| WFC-M-12L-AOKO | Medium | 40 | II | 3000 | 5360 | 134 |
| | | 40 | II | 4000 | 6240 | 156 |
| | | 40 | II | 5000 | 5760 | 144 |
| | | 40 | III | 3000 | 5920 | 148 |
| | | 40 | III | 4000 | 6240 | 156 |
| | | 40 | III | 5000 | 6440 | 161 |
| | | 40 | IV | 3000 | 5240 | 131 |
| | | 40 | IV | 4000 | 6160 | 154 |
| | | 40 | IV | 5000 | 5680 | 142 |
| | | 60 | II | 3000 | 7860 | 131 |
| | | 60 | II | 4000 | 9180 | 153 |
| | | 60 | II | 5000 | 8460 | 141 |
| | | 60 | III | 3000 | 8700 | 145 |
| | | 60 | III | 4000 | 9660 | 161 |
| | | 60 | III | 5000 | 9480 | 158 |
| | | 60 | IV | 3000 | 7680 | 128 |
| | | 60 | IV | 4000 | 9060 | 151 |
| | | 60 | IV | 5000 | 8340 | 139 |
| | | 80 | II | 3000 | 10240 | 128 |
| | | 80 | II | 4000 | 12000 | 150 |
| | | 80 | II | 5000 | 11040 | 138 |
| | | 80 | III | 3000 | 11360 | 142 |
| | | 80 | III | 4000 | 12640 | 158 |
| | | 80 | III | 5000 | 12400 | 155 |
| 80 | IV | 3000 | 10000 | 125 | | |
| 80 | IV | 4000 | 12640 | 158 | | |
| 80 | IV | 5000 | 10880 | 136 | | |
| WFC-L-19L-AOKO | Large | 80 | II | 3000 | 11360 | 142 |
| | | 80 | II | 4000 | 12880 | 161 |
| | | 80 | II | 5000 | 11840 | 148 |
| | | 80 | III | 3000 | 12320 | 154 |
| | | 80 | III | 4000 | 13280 | 166 |
| | | 80 | III | 5000 | 12960 | 162 |
| | | 80 | IV | 3000 | 11040 | 138 |
| | | 80 | IV | 4000 | 12560 | 157 |
| | | 80 | IV | 5000 | 11520 | 144 |
| | | 100 | II | 3000 | 13900 | 139 |
| | | 100 | II | 4000 | 15800 | 158 |
| | | 100 | II | 5000 | 14500 | 145 |
| | | 100 | III | 3000 | 15100 | 151 |
| | | 100 | III | 4000 | 16300 | 163 |
| | | 100 | III | 5000 | 15900 | 159 |
| | | 100 | IV | 3000 | 13500 | 135 |
| | | 100 | IV | 4000 | 15400 | 154 |
| | | 100 | IV | 5000 | 14100 | 141 |
| | | 120 | II | 3000 | 16320 | 136 |
| | | 120 | II | 4000 | 18600 | 155 |
| | | 120 | II | 5000 | 17040 | 142 |
| | | 120 | III | 3000 | 17760 | 148 |
| | | 120 | III | 4000 | 19200 | 160 |
| | | 120 | III | 5000 | 18720 | 156 |
| 120 | IV | 3000 | 15840 | 132 | | |
| 120 | IV | 4000 | 18120 | 151 | | |
| 120 | IV | 5000 | 16560 | 138 | | |

Catalog Ordering


Sample Part # WFC-M-12L-AOKO



| 1 - Series | 2 - Module (Size & Lumens) | 3 - Type | 4 - Finish |
|---|---|--|---|
| WFC | M-12L (Medium / 40W-60W-80W) L-19L (Large / 80W-100W-120W) | AOKO (Adjustable Output, Kelvin Temp 30K, 40K, 50K and Optics Type II, III, IV) | Blank (Standard - Dark Bronze) B (Black) ¹ W (White) ¹ |
| 5 - Options (Controls) | 6 - Accessories | | |
| Blank (Integrated DC Photocell) OS-PW (Wet Location PIR Programmable Occupancy Sensor) | EM8W (Emergency Battery Back-Up 8W) | | |

Dimensions

| Version | Depth(A) | Width (B) | Height (C) | Weight |
|---------|----------|-----------|------------|----------|
| Medium | 9.4" | 10.7" | 6.9" | 9.9 lbs |
| Large | 9.4" | 13.3" | 8.1" | 12.2 lbs |

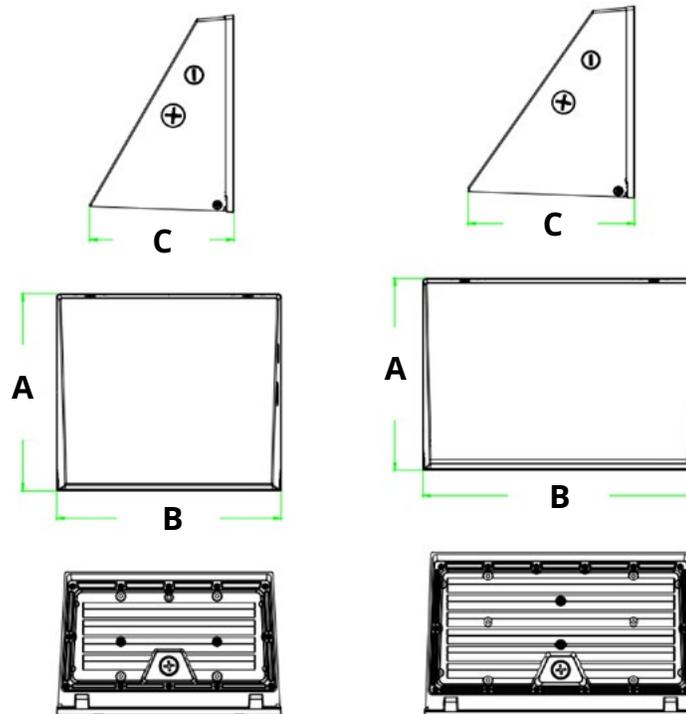

Notes

1 - 100 piece MOQ and 90 Days Delivery