

Date:	Project:	Type:	Notes:	Catalog #:
-------	----------	-------	--------	------------

WUD-AOK SERIES Adjustable Up Down LED Wall Pack

The WUD-AOK Series is great for commercial and industrial applications. Field adjustable output and color options make the WUD-AOK the ideal choice for architectural illumination of building perimeters. Adjustability includes three lumen outputs and three color temperatures. RGB Available - Special Order Only (MoQ of 100 Pieces)



Features & Specifications

Applications

Ideal for use in exterior commercial and industrial building perimeters.

Construction

Housing made from die-cast aluminum. Tempered glass lens.

Mounting

Wall Mount.

Electrical

Utilizes high-efficiency LED power supply and circuit boards. 120-277V standard. Multi-color switch (30K, 40K, 50K). Three lumen outputs selectable (20W - 2000lm - 36W - 4100lm). 50/60Hz, 0-10V dimming. <20% THD. 6Kv Surge Protection.

Operating Temperature

-40C to +50C.

CRI

<80

Finish

Dark Bronze

Warranty

Five-year warranty. Terms and Conditions Apply. See warranty documentation for more information.

Certification

UL Wet Listed. IP65 Rated.

Performance Data

FSC Part #	Form Factor	Rated Wattage	Kelvin Temp	Delivered Lumens	Efficacy
WUD-S-4L-AOK	Small	20	3000	2120	106
		20	4000	2420	121
		20	5000	2280	114
		30	3000	3090	103
		30	4000	3540	118
		30	5000	3330	111
		36	3000	3600	100
		36	4000	4140	115
WUD-S-1L-RGB	Small	36	RED	290	26
		36	GREEN	725	55
		36	BLUE	1360	10
		36	WHITE	1080	30



Catalog Ordering

Sample Part # WUD-S-4L-AOK



1 - Series	2 - Module	3 - Type	4 - Finish
WUD	S-4L (Small / 15W-30W-36W) S-1L (Small / 36W) ¹	AOK (Adjustable Output and Kelvin Temp 30K, 40K, 50K) RGB (Color Tuning with Remote) ¹	Blank (Standard - Dark Bronze) BL (Black) ¹ Wh (White) ¹


Notes

1 - 100 piece MOQ and 90 Days Delivery

Physical Characteristics

Dimensions

Version	Width	Height	Length
All Sizes	4.72"	14.2"	5.9"

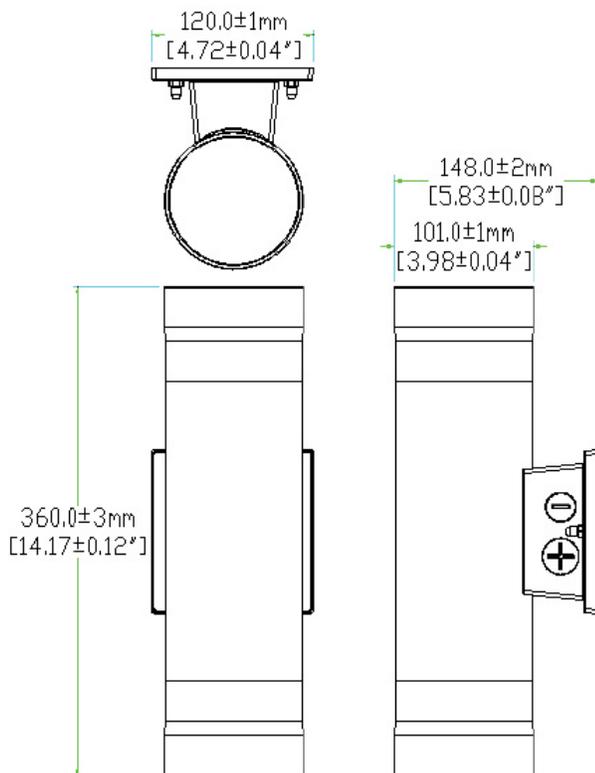

RGB Mixed Colors

