

Date:	Project:	Type:	Notes:	Catalog #:
-------	----------	-------	--------	------------

L285-AOK SERIES
Adjustable Output LED Lensed Strip



The L285-AOK Series is a functional multi-purpose LED lensed strip that incorporates premium performance and construction durability.



Features & Specifications

Applications

Ideal for use in warehouses, distribution centers, parking garages, covered parking, shops, utility rooms, stairwells, corridors, canopies and general lighting.

Construction

Housing made from die formed heavy gauge cold rolled steel and is finished with a post- production baked white powder coat. Frosted lens.

Mounting

Surface mount. Chain and cable mount ready. Cord and plug options offered.

Electrical

Utilizes high-efficiency LED power supply and circuit boards. 120-277V & 0-10V dimming standard. 480V option. 50/60HZ input frequency.

Operating Temperature

Suitable for -40°C – 50°C Ambient

Lumen Maintenance

L70 rating of 189,000 hours

Warranty

Five-year warranty. Terms and Conditions Apply. See warranty documentation for more information.

Certification

UL Damp Listed. Adheres to LM79, LM80 and TM21 industry standards. DesignLights Consortium® (DLC) qualified.

DLC 5.1 rating¹. RoHS Compliant.

Performance Data

Form Factor	Rated Wattage	Tested Wattage	Delivered Lumens	Efficacy	CRI
4FT	18W	18W	2,340 LM	130 LPW	>83
4FT	22W	22W	2,860 LM	130 LPW	>83
4FT	25W	25W	3,250 LM	130 LPW	>83
4FT	28W	28W	3,460 LM	130 LPW	>83
4FT	30W	30W	3,900 LM	130 LPW	>83
4FT	35W	35W	4,550 LM	130 LPW	>83
4FT	40W	40W	5,200 LM	130 LPW	>83
4FT	45W	45W	5,850 LM	130 LPW	>83
8FT	38W	38W	4,940 LM	130 LPW	>83
8FT	54W	54W	7,020 LM	130 LPW	>83
8FT	65W	65W	8,450 LM	130 LPW	>83
8FT	75W	75W	9,750 LM	130 LPW	>83
8FT	90W	90W	11,700 LM	130 LPW	>83



L285								
1	2	3	4	5	6	6	6	7

1 - Series	2 - Length in Inches/Wattage	3 - Type	4 - Version
L285	48 - 30W (4 Foot, 18 Watt) (4 Foot, 25 Watt) (4 Foot, 30 Watt) 48 - 40W (4 Foot, 22 Watt) (4 Foot, 28 Watt) (4 Foot, 40 Watt) 48 - 45W (4 Foot, 35 Watt) (4 Foot, 40 Watt) (4 Foot, 45 Watt) 96 - 65W (8 Foot, 38 Watt) (8 Foot, 54 Watt) (8 Foot, 65 Watt) 96 - 90W (8 Foot, 65 Watt) (8 Foot, 75 Watt) (8 Foot, 90 Watt)	AOK (Adjustable Output and Kelvin Temp 35K, 40K & 50K)	S5 (DLC Version 5.1)

5 - Controls

OS (Occupancy Sensor)
PRGOS-LS (SensorSwitch LSXR-ADC-3v Occ Sensor w/ Dimming Photocell)
PRGOS-LR (IRTEC LRD509 Programmable Occ Sensor w/ Remote Control)

6 - Options

EM5W (Battery Backup, 5 Watts, ~650 lumens)²
EM10W (Battery Backup, 10 Watts, ~1300 lumens)²
EM5WT20 (Title 20 Compliant Battery Backup, 5 Watts, ~650 lumens)²
EM10WT20 (Title 20 Compliant Battery Backup, 10 Watts, ~1300 lumens)²
480SD (480 Step-Down)
PLG (6' SJT Cord & Plug)
PP (PowerPlus)
BAA (Buy American Act Compliant)

7 - Accessories (Sold Separately)

10GL (10' Loop w/ Gripple Hanging Kit)³

Notes

1 Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/ to confirm which versions are qualified.
 2 Lumens will change based on fixture selection. Consult with factory for additional options.
 3 Mounting kit is manufactured by Gripple Inc.


Photometric Data

L28548-40W-AOK Tested in accordance to IESNA LM-79

Zonal Lumen Summary

Zone	Lumens	%Luminaire
0-10	132.70	2.63%
10-20	378.50	7.52%
20-30	569.74	11.31%
30-40	683.90	13.58%
40-50	711.93	14.14%
50-60	662.91	13.16%
60-70	561.39	11.15%
70-80	434.31	8.62%
80-90	312.66	6.21%
90-100	219.70	4.36%
100-110	150.13	2.98%
110-120	93.39	1.85%
120-130	51.43	1.02%
130-140	31.55	0.63%
140-150	20.54	0.41%
150-160	12.63	0.25%
160-170	6.88	0.13%
170-180	2.36	0.05%

Polar Graph

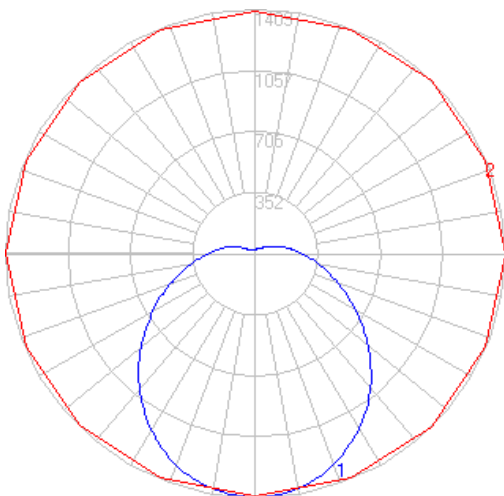

Physical Characteristics

Dimensions

Version	Depth	Length	Width	Weight
4FT	3.56"	48.0"	3.35"	7lbs
8FT	3.56"	96.0"	3.35"	14lbs


Top View



Bottom View



Side View



End View

